


XCHANGE® Utility Module

E80/E100 Electrical Modules

Electrical Modules pass signals during an automatic tool changing operation.

Advantages:

- Flexible Connection Options
- Aluminum construction to reduce EMI
- Low-Profile to minimize end effector height
- Replacement probes for fast and easy maintenance
- IP65 when coupled

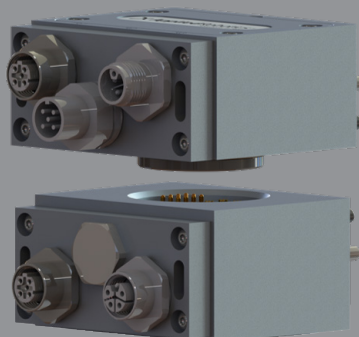

SPECIFICATIONS

Model	Description	User Connection	Rated Current	Rated Voltage	Couple/Un couple Sensor Interface	Tool Identification Included	Weight**
			A	V (AC/DC)			
E100-R-D-PG-20.05-00-N	Robot Adaptor - Strain Relief	Strain Relief (6.0 mm – 12.0 mm OD) 20x Max. Wire Gauge: 22 AWG	5 *	1000 *	No	N/A	0.24 (0.53)
E100-T-D-PG-20.05-00-N	Tool Adaptor - Strain Relief	Strain Relief (6.0 mm – 12.0 mm OD) 20x Max. Wire Gauge: 22 AWG	5 *	1000 *	N/A	No	0.26 (0.57)
E100-R-D-M23-17.05-00-N	Robot Adaptor - Discrete M23	17 PIN, M23 "E" CW	5	125	Optional	N/A	0.24 (0.53)
E100-T-D-M23-17.05-00-N	Tool Adaptor - Discrete M23	17 SOC, M23 "P" CCW	5	125	N/A	Optional	0.26 (0.57)
E100-R-D-MS-18.05-00-N	Robot Adaptor - Discrete MS	18 PIN, MS3112E14-18P	5	600	Optional	N/A	0.24 (0.53)
E100-T-D-MS-18.05-00-N	Tool Adaptor - Discrete MS	18 SOC, MS3112E14-18S	5	600	N/A	Optional	0.26 (0.57)
E100-T-D-N-0.05-15-N ***	Tool Adaptor - Tool Identification	N/A (Tool ID Only) Up to 15 Tools	1	28	N/A	Yes	0.26 (0.57)
E100-R-EIP/PN-M12-5.16/4.05-00-N	Robot Adaptor - Profinet	4 SOC, M12 D-CODED 5 PIN, M12 L-CODED	4 16	250 63	Optional	N/A	0.24 (0.53)
E100-T-EIP/PN-M12-5.16/4.05-00-N	Tool Adaptor - Profinet	4 SOC, M12 D-CODED 5 SOC, M12 L-CODED	4 16	250 63	N/A	No	0.24 (0.53)
E100-R-D-M23-6.16-00-N	Robot Adaptor - Discrete Power M23	6 PIN, M23 "E" CW	16	630	No	N/A	0.24 (0.53)
E100-T-D-M23-6.16-00-N	Tool Adaptor - Discrete Power M23	6 SOC, M23 "P" CCW	16	630	N/A	No	0.26 (0.57)
E100-R-D-MS-5.16-00-N	Robot Adaptor - Discrete Power MS	5 PIN, MS3112E14-5P	13	1000/1275	No	N/A	0.24 (0.53)
E100-T-D-MS-5.16-00-N	Tool Adaptor - Discrete Power MS	5 SOC, MS3112E14-5S	13	1000/1275	N/A	No	0.26 (0.57)

* Rated Current/Voltage may change based upon cable/wire rating.


** Module weight may vary depending on specific configuration.

*** Tool Identification Module can be used with any Robot Adaptor Modules listed above it.

Operating Temperature: **5 - 60 °C (40 - 140 °F)**


Noise Emissions (Sound Pressure): **≤ 70 dB(A) in any direction**

CONTACT PROBE TECHNOLOGY

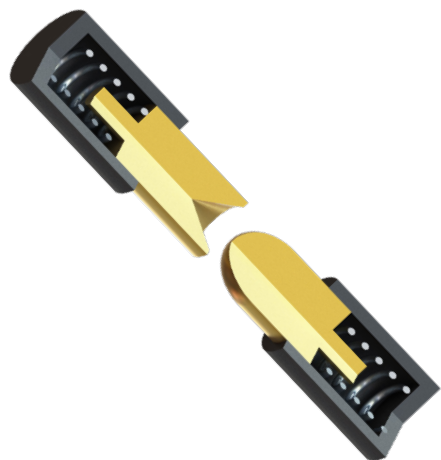

Epsilon **XCHANGE®**
electrical modules use spring
loaded contact probes
for their many benefits:




- Low contact resistance
- High mating cycles
- Limited debris buildup
- Minimal maintenance

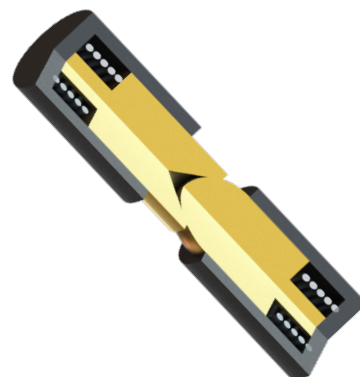



* Images are visual representations only.

PRODUCT INFORMATION

ROBOT ADAPTOR MODULE

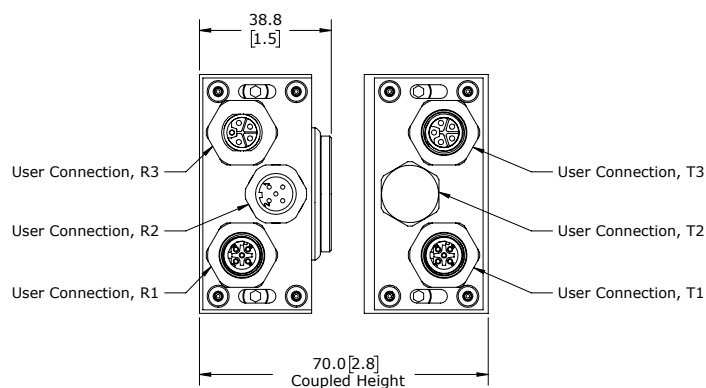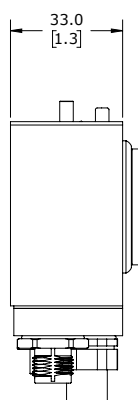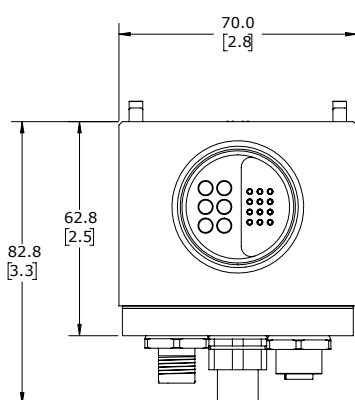

TOOL ADAPTOR MODULE

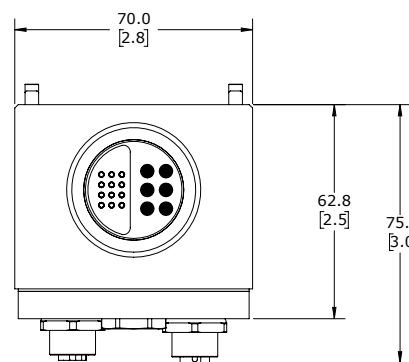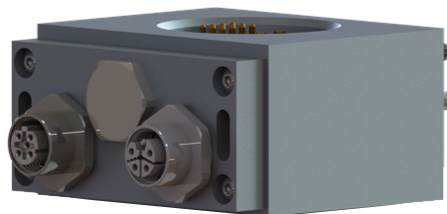

Mounting Hardware Included:

2x M4 x 10 Dowels
2x M4 x 45 SHCS

* Dimensions are in millimeters (inches).

** All dimensions are descriptive and subject to variation for technical upgrading. We reserve the right to make variations without prior notification.



Effecto Group S.p.A.
Via Roma, 141/143
28017 San Maurizio d'Opaglio (NO) - IT
Tel. +39 0322 96142
info@effecto.com

Effecto, Inc.
648 Saratoga Road
Glenville, NY 12302 - US
Tel. +1 518 384 1000
info@us.effecto.com

www.effecto.com

Effecto GmbH
Liegnitzer Str. 6
82194 Gröbenzell - DE
Tel. +49 8142 59397 0
info@de.effecto.com