




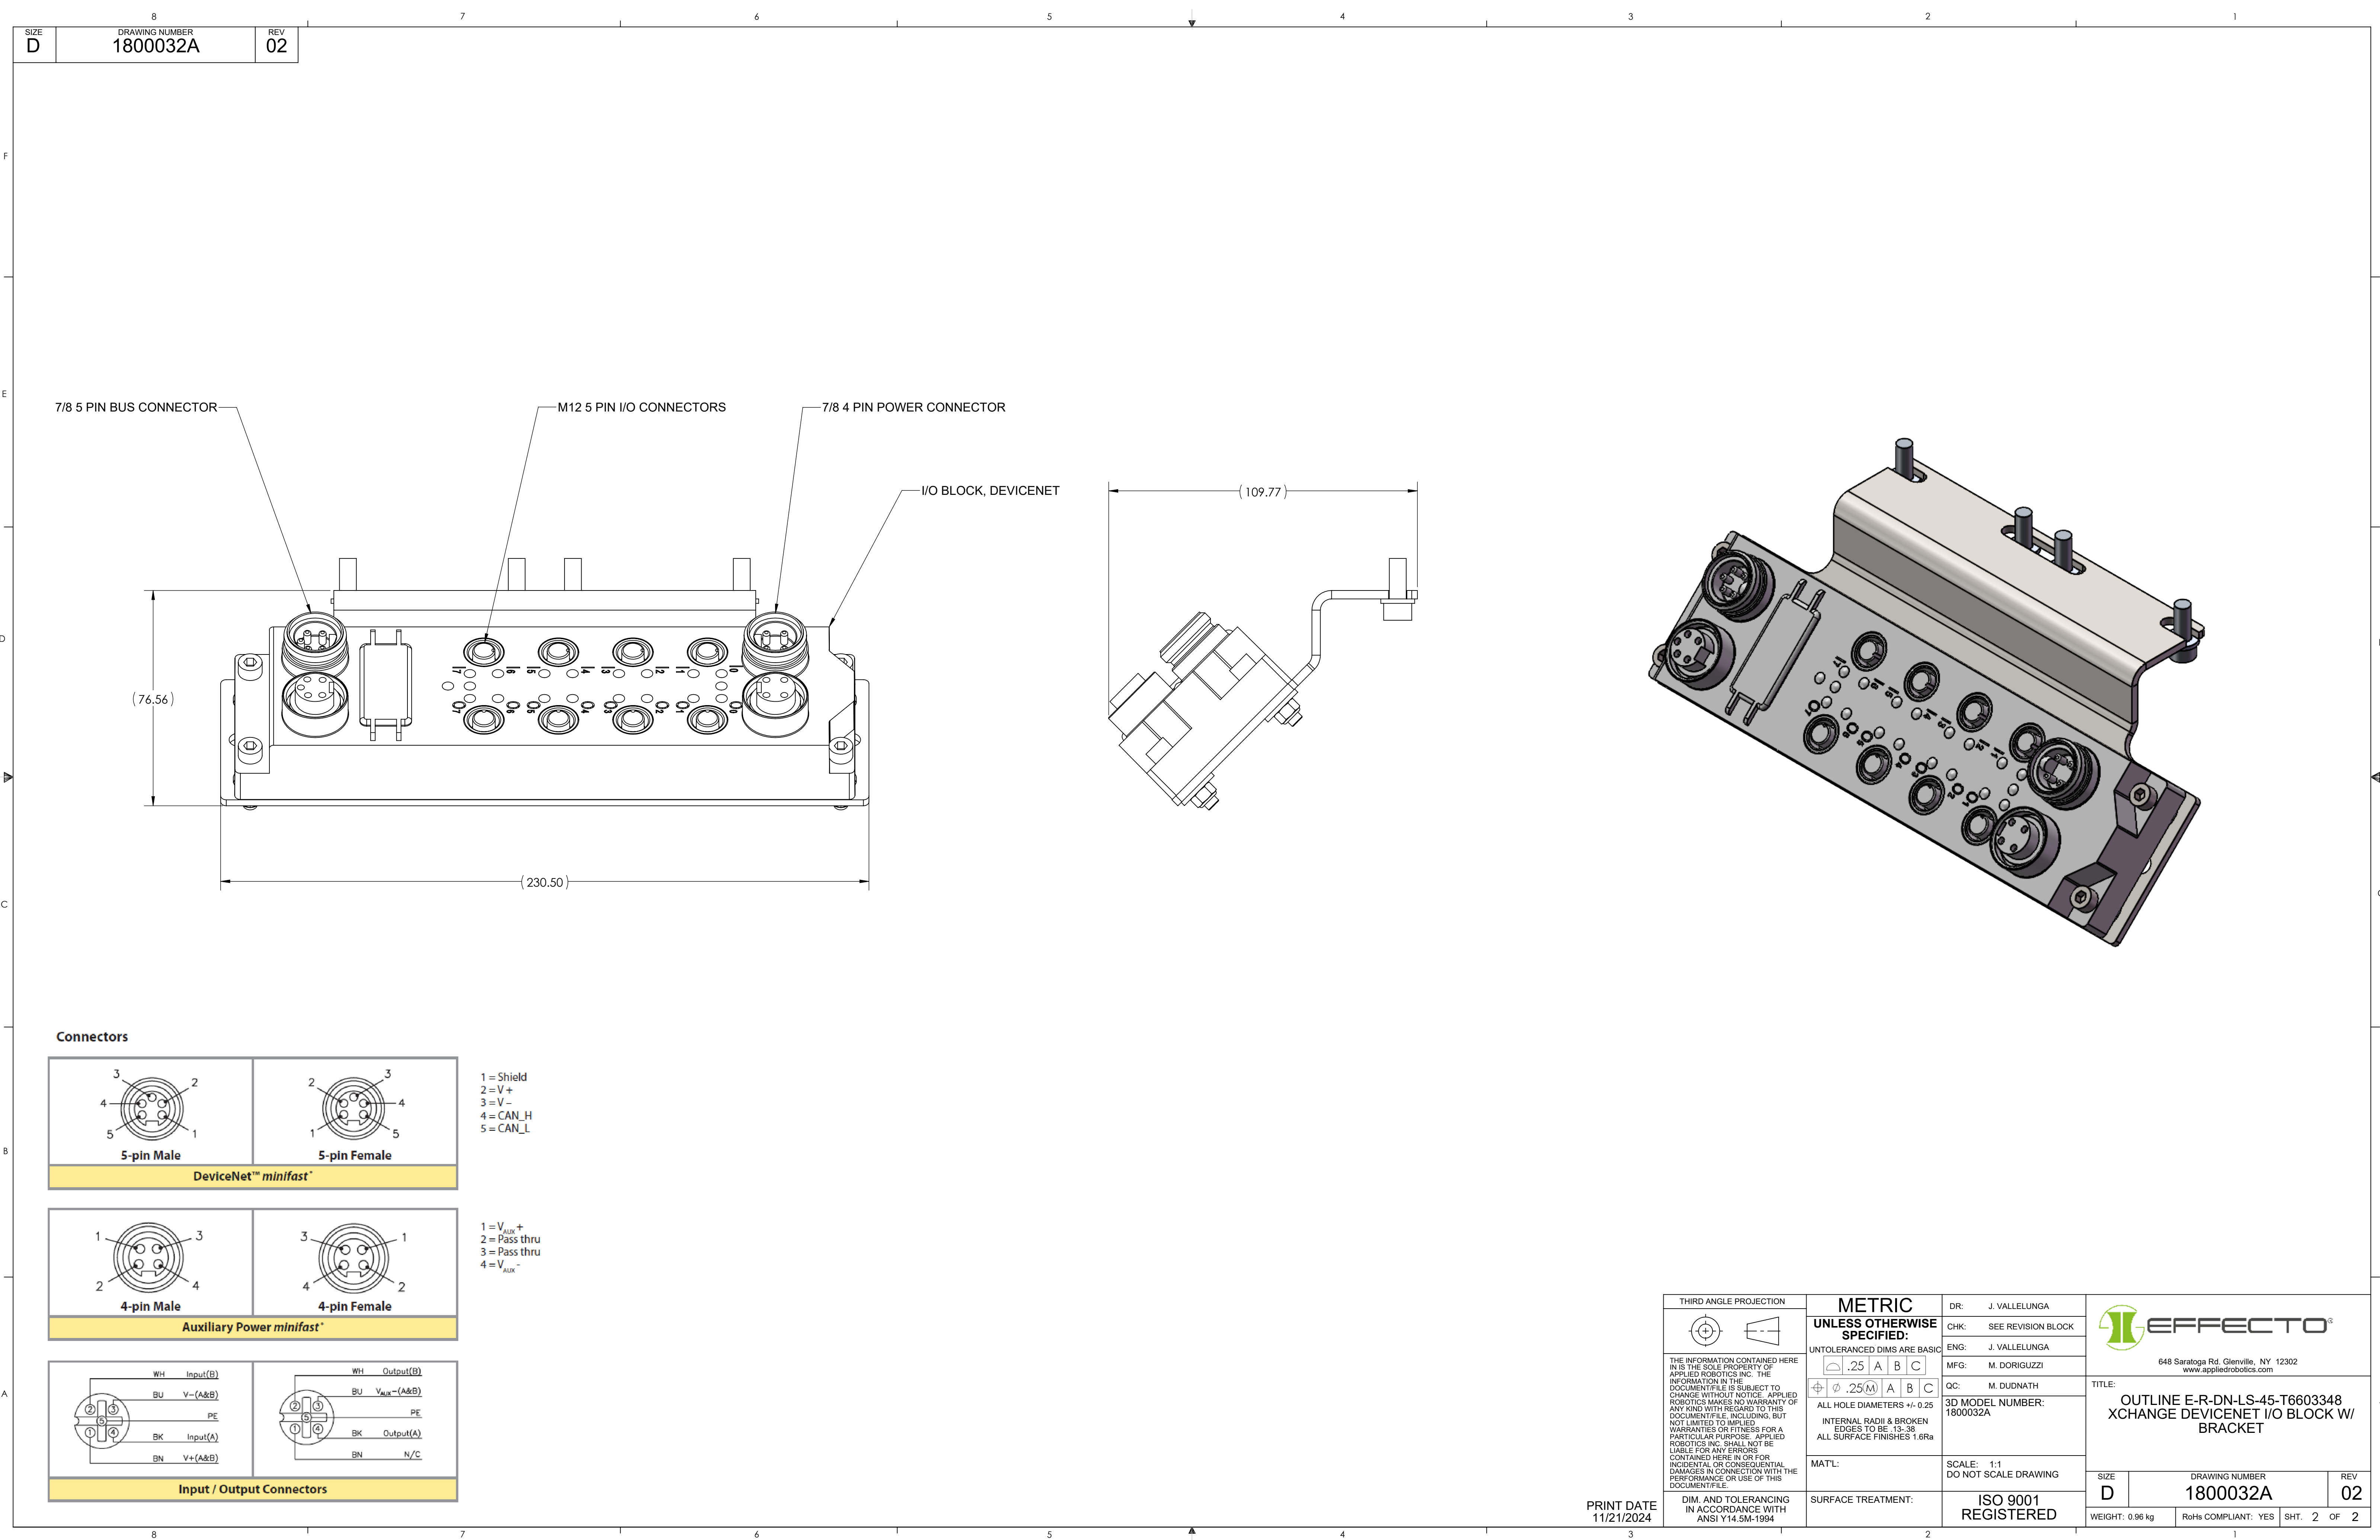


Connectors

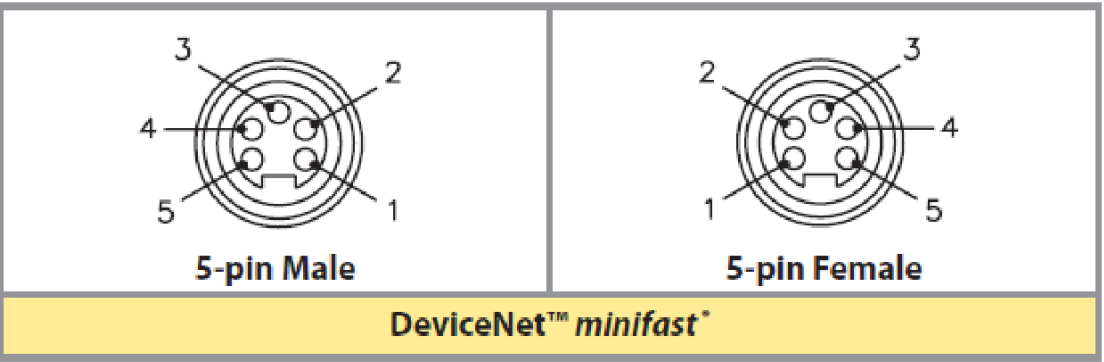




1 = Shield
2 = V +
3 = V -
4 = CAN_H
5 = CAN_L

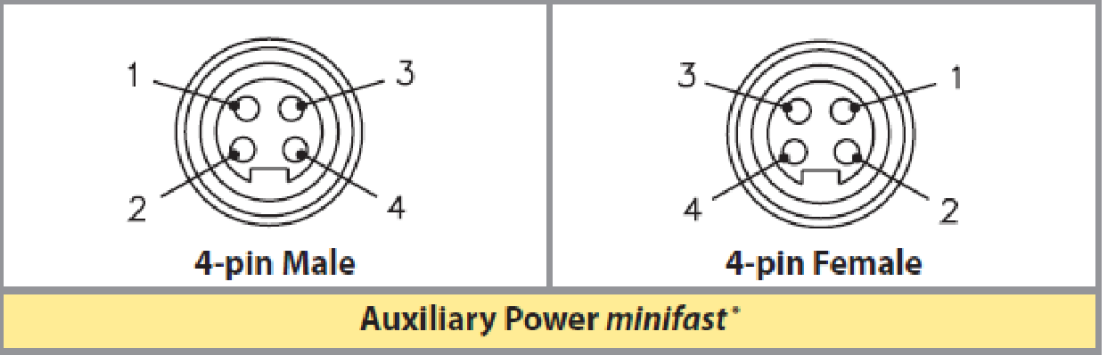

1 = V_{AUX} +
2 = Pass thru
3 = Pass thru
4 = V_{AUX} -

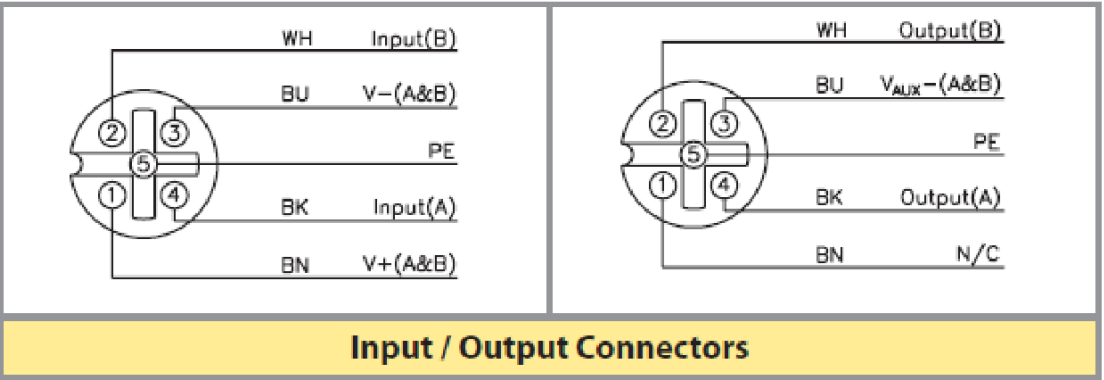

PRINT DATE
11/21/2024

THIRD ANGLE PROJECTION	METRIC	DR: J. VALLELUNGA		
	UNLESS OTHERWISE SPECIFIED:	CHK: SEE REVISION BLOCK		
UNTOLERANCED DIMS ARE BASIC	 .25 A B C	ENG: J. VALLELUNGA		
ALL HOLE DIAMETERS +/- 0.25	 φ .25(M) A B C	MFG: M. DORIGUZZI		
INTERNAL RADII & BROKEN EDGES TO BE .13-.38	ALL SURFACE FINISHES 1.6Ra	QC: M. DUDNATH	TITLE:	
MAT'L:	SCALE: 1:1 DO NOT SCALE DRAWING	3D MODEL NUMBER: 1800032A	OUTLINE E-R-DN-LS-45-T6603348 XCHANGE DEVICENET I/O BLOCK W/ BRACKET	
DIM. AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5M-1994	SURFACE TREATMENT:	ISO 9001 REGISTERED	SIZE D	DRAWING NUMBER 1800032A
			REV 02	
			WEIGHT: 0.96 kg	RoHs COMPLIANT: YES
			SHT. 2	OF 2