

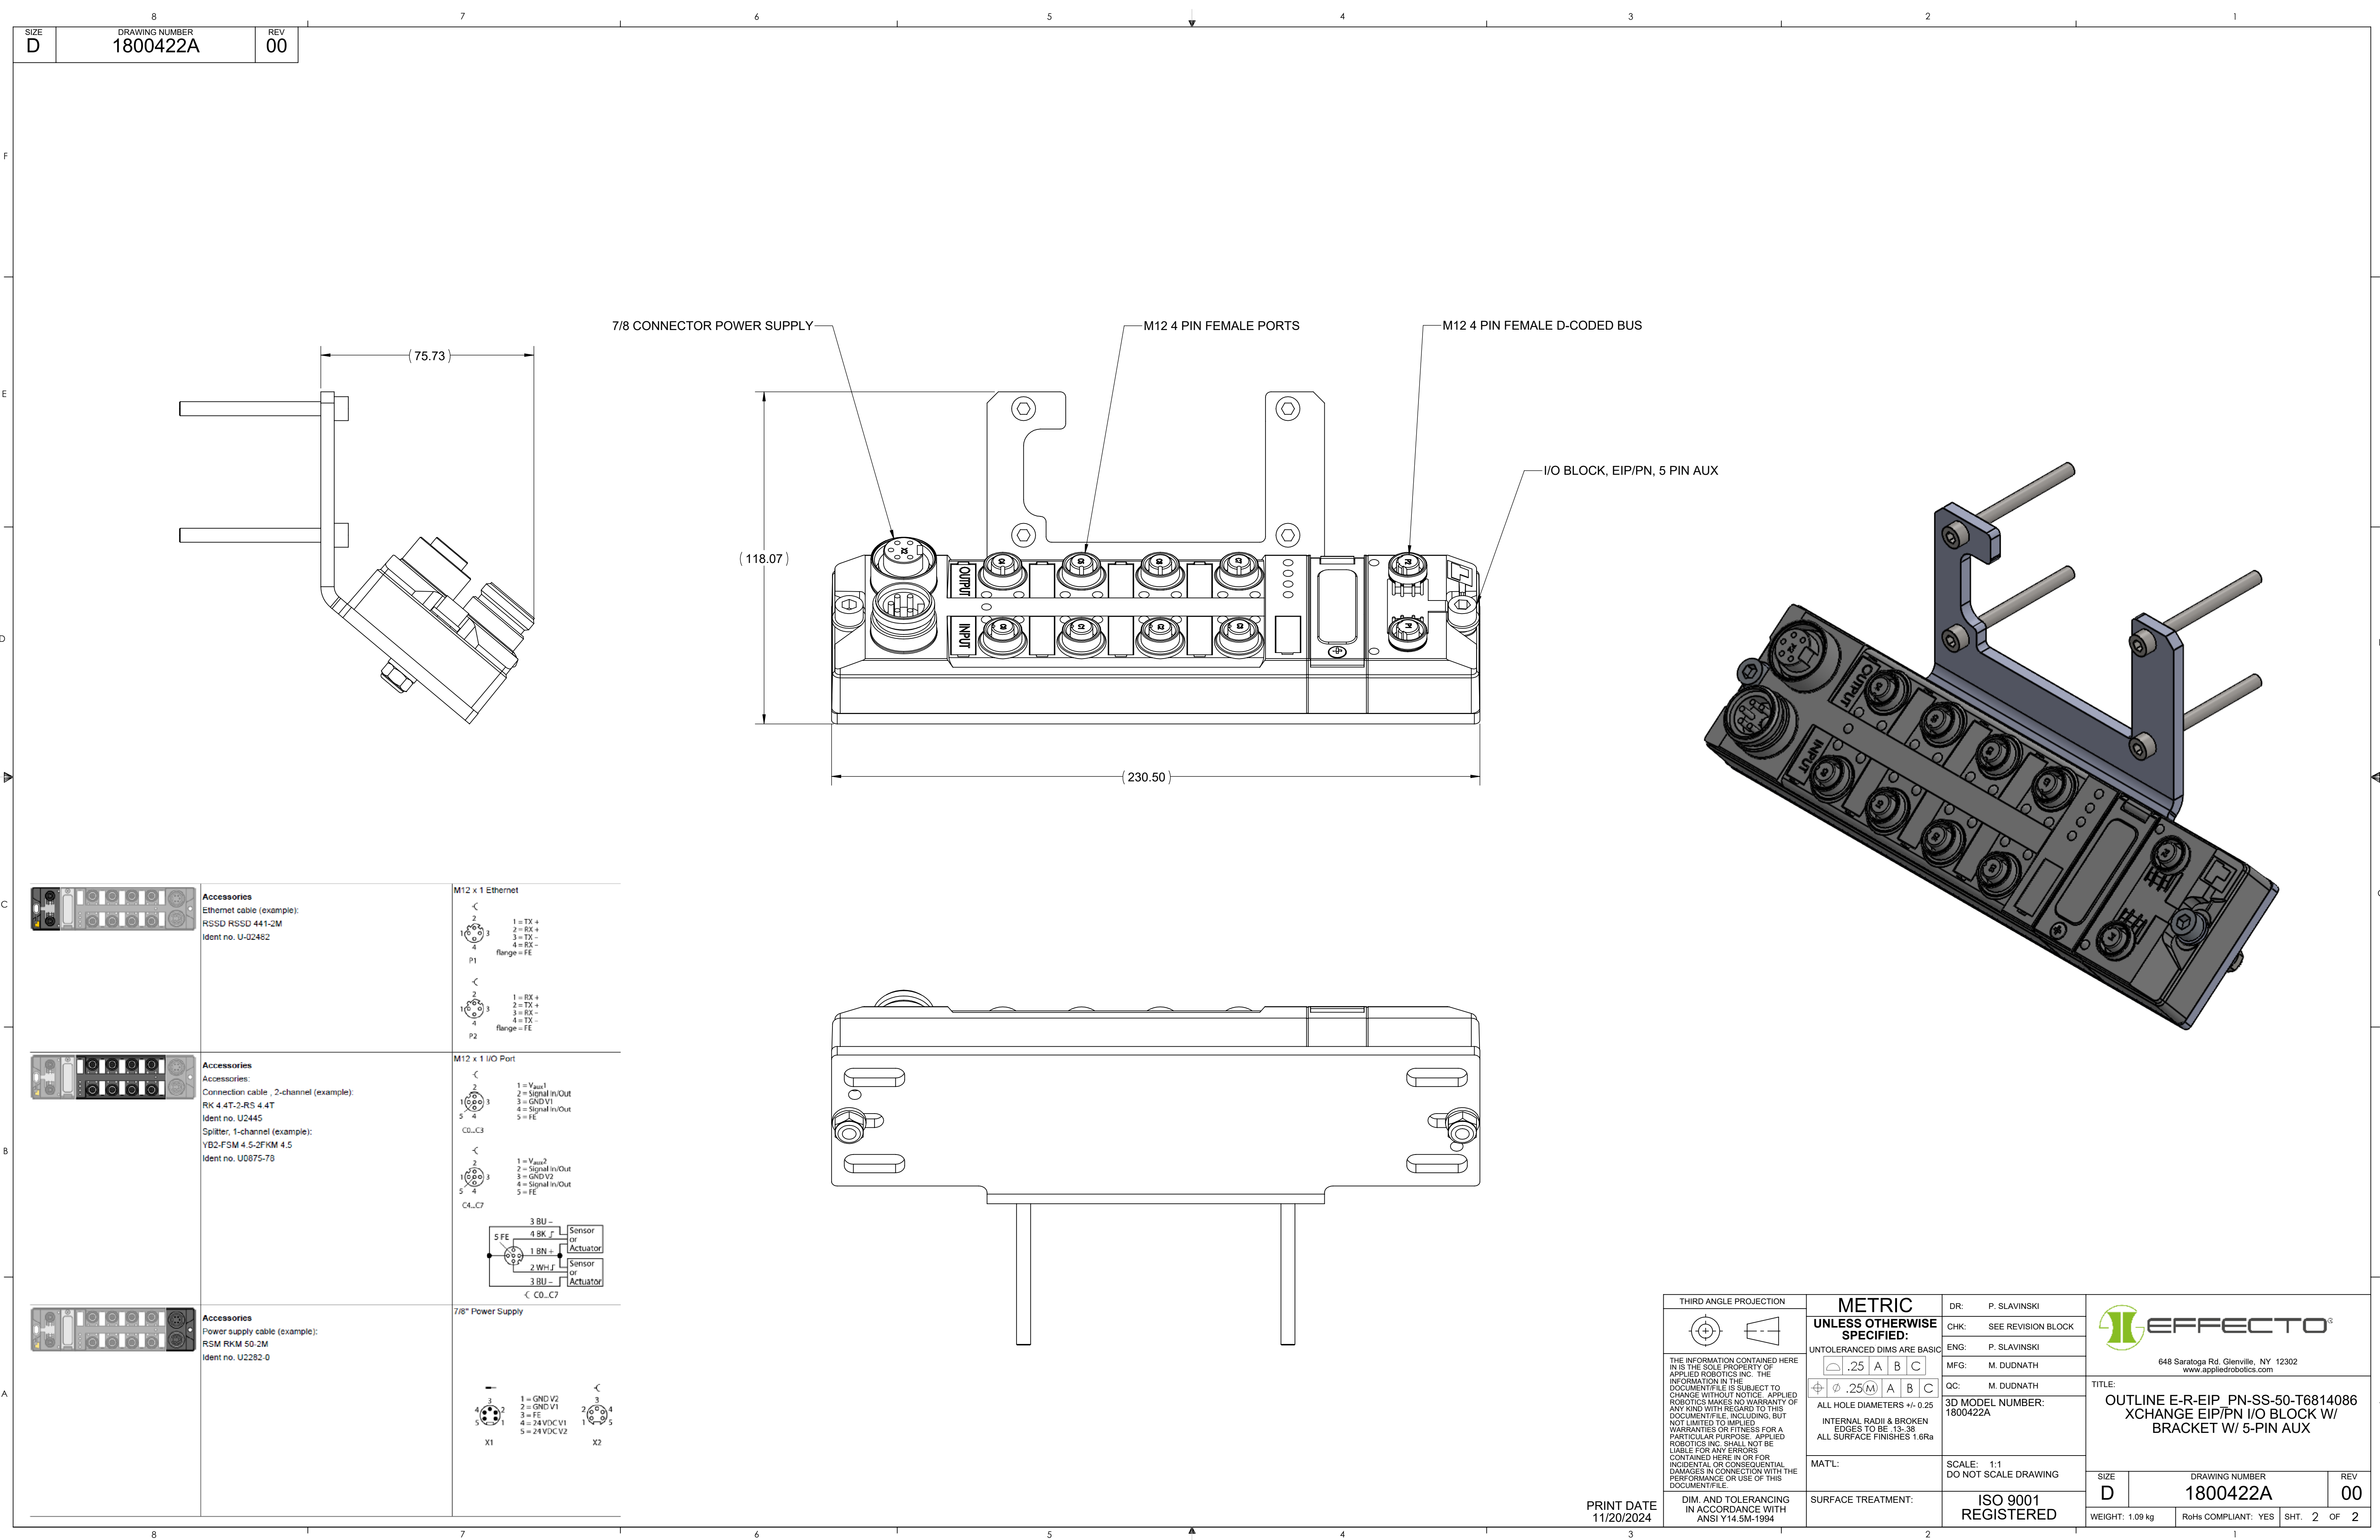

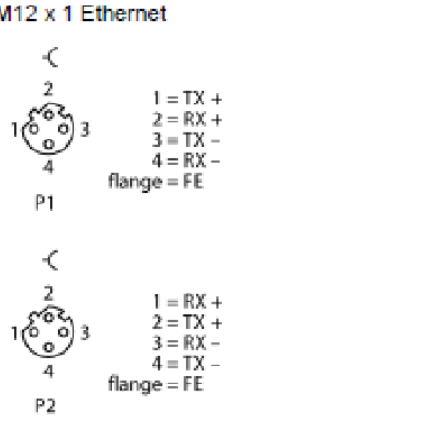



Accessories
Ethernet cable (example):
RSSD RSSD 441-2M
Ident no. U-02482







Accessories
Accessories:
Connection cable, 2-channel (example):
RK 4.4T-2-RS 4.4T
Ident no. U2445
Splitter, 1-channel (example):
YB2-FSM 4.5-2FKM 4.5
Ident no. U0875-70

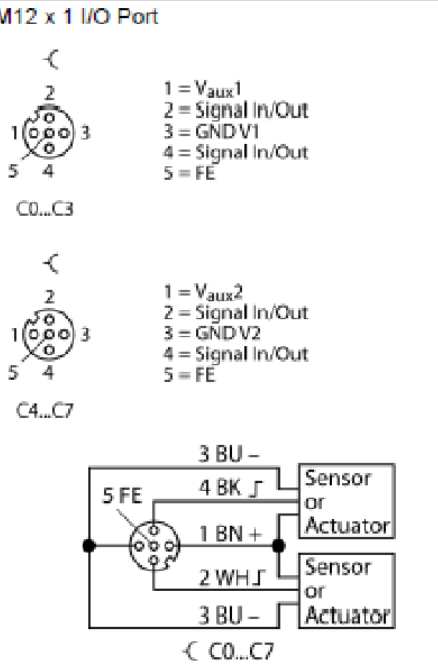

Accessories
Power supply cable (example):
RSM RKM 50-2M
Ident no. U2282-0

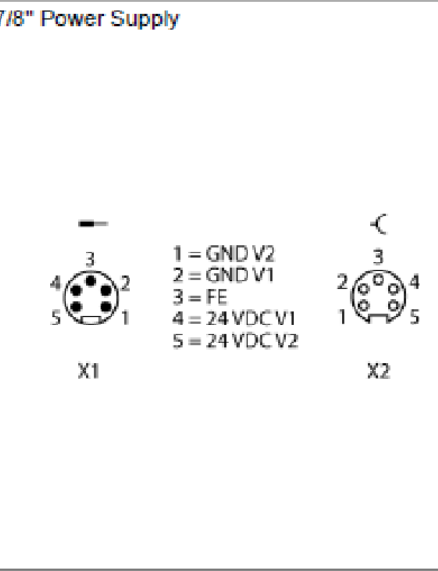

PRINT DATE
11/20/2024

THIRD ANGLE PROJECTION		METRIC UNLESS OTHERWISE SPECIFIED:		DR: P. SLAVINSKI	 648 Saratoga Rd. Glenville, NY 12302 www.appliedrobotics.com
		UNTOLERANCED DIMS ARE BASIC		CHK: SEE REVISION BLOCK	
		ALL HOLE DIAMETERS +/- 0.25		ENG: P. SLAVINSKI	
		INTERNAL RADII & BROKEN EDGES TO BE 1:3-38		MFG: M. DUDNATH	
THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE. APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HEREIN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.				QC: M. DUDNATH	TITLE: OUTLINE E-R-EIP PN-SS-50-T6814086 XCHANGE EIP/PN I/O BLOCK W/ BRACKET W/ 5-PIN AUX
DIM. AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5M-1994		SURFACE TREATMENT:		3D MODEL NUMBER: 1800422A	
				SCALE: 1:1 DO NOT SCALE DRAWING	
				ISO 9001 REGISTERED	SIZE D
					DRAWING NUMBER 1800422A
					REV 00
					WEIGHT: 1.09 kg
					RoHS COMPLIANT: YES
					SHT. 2 OF 2