


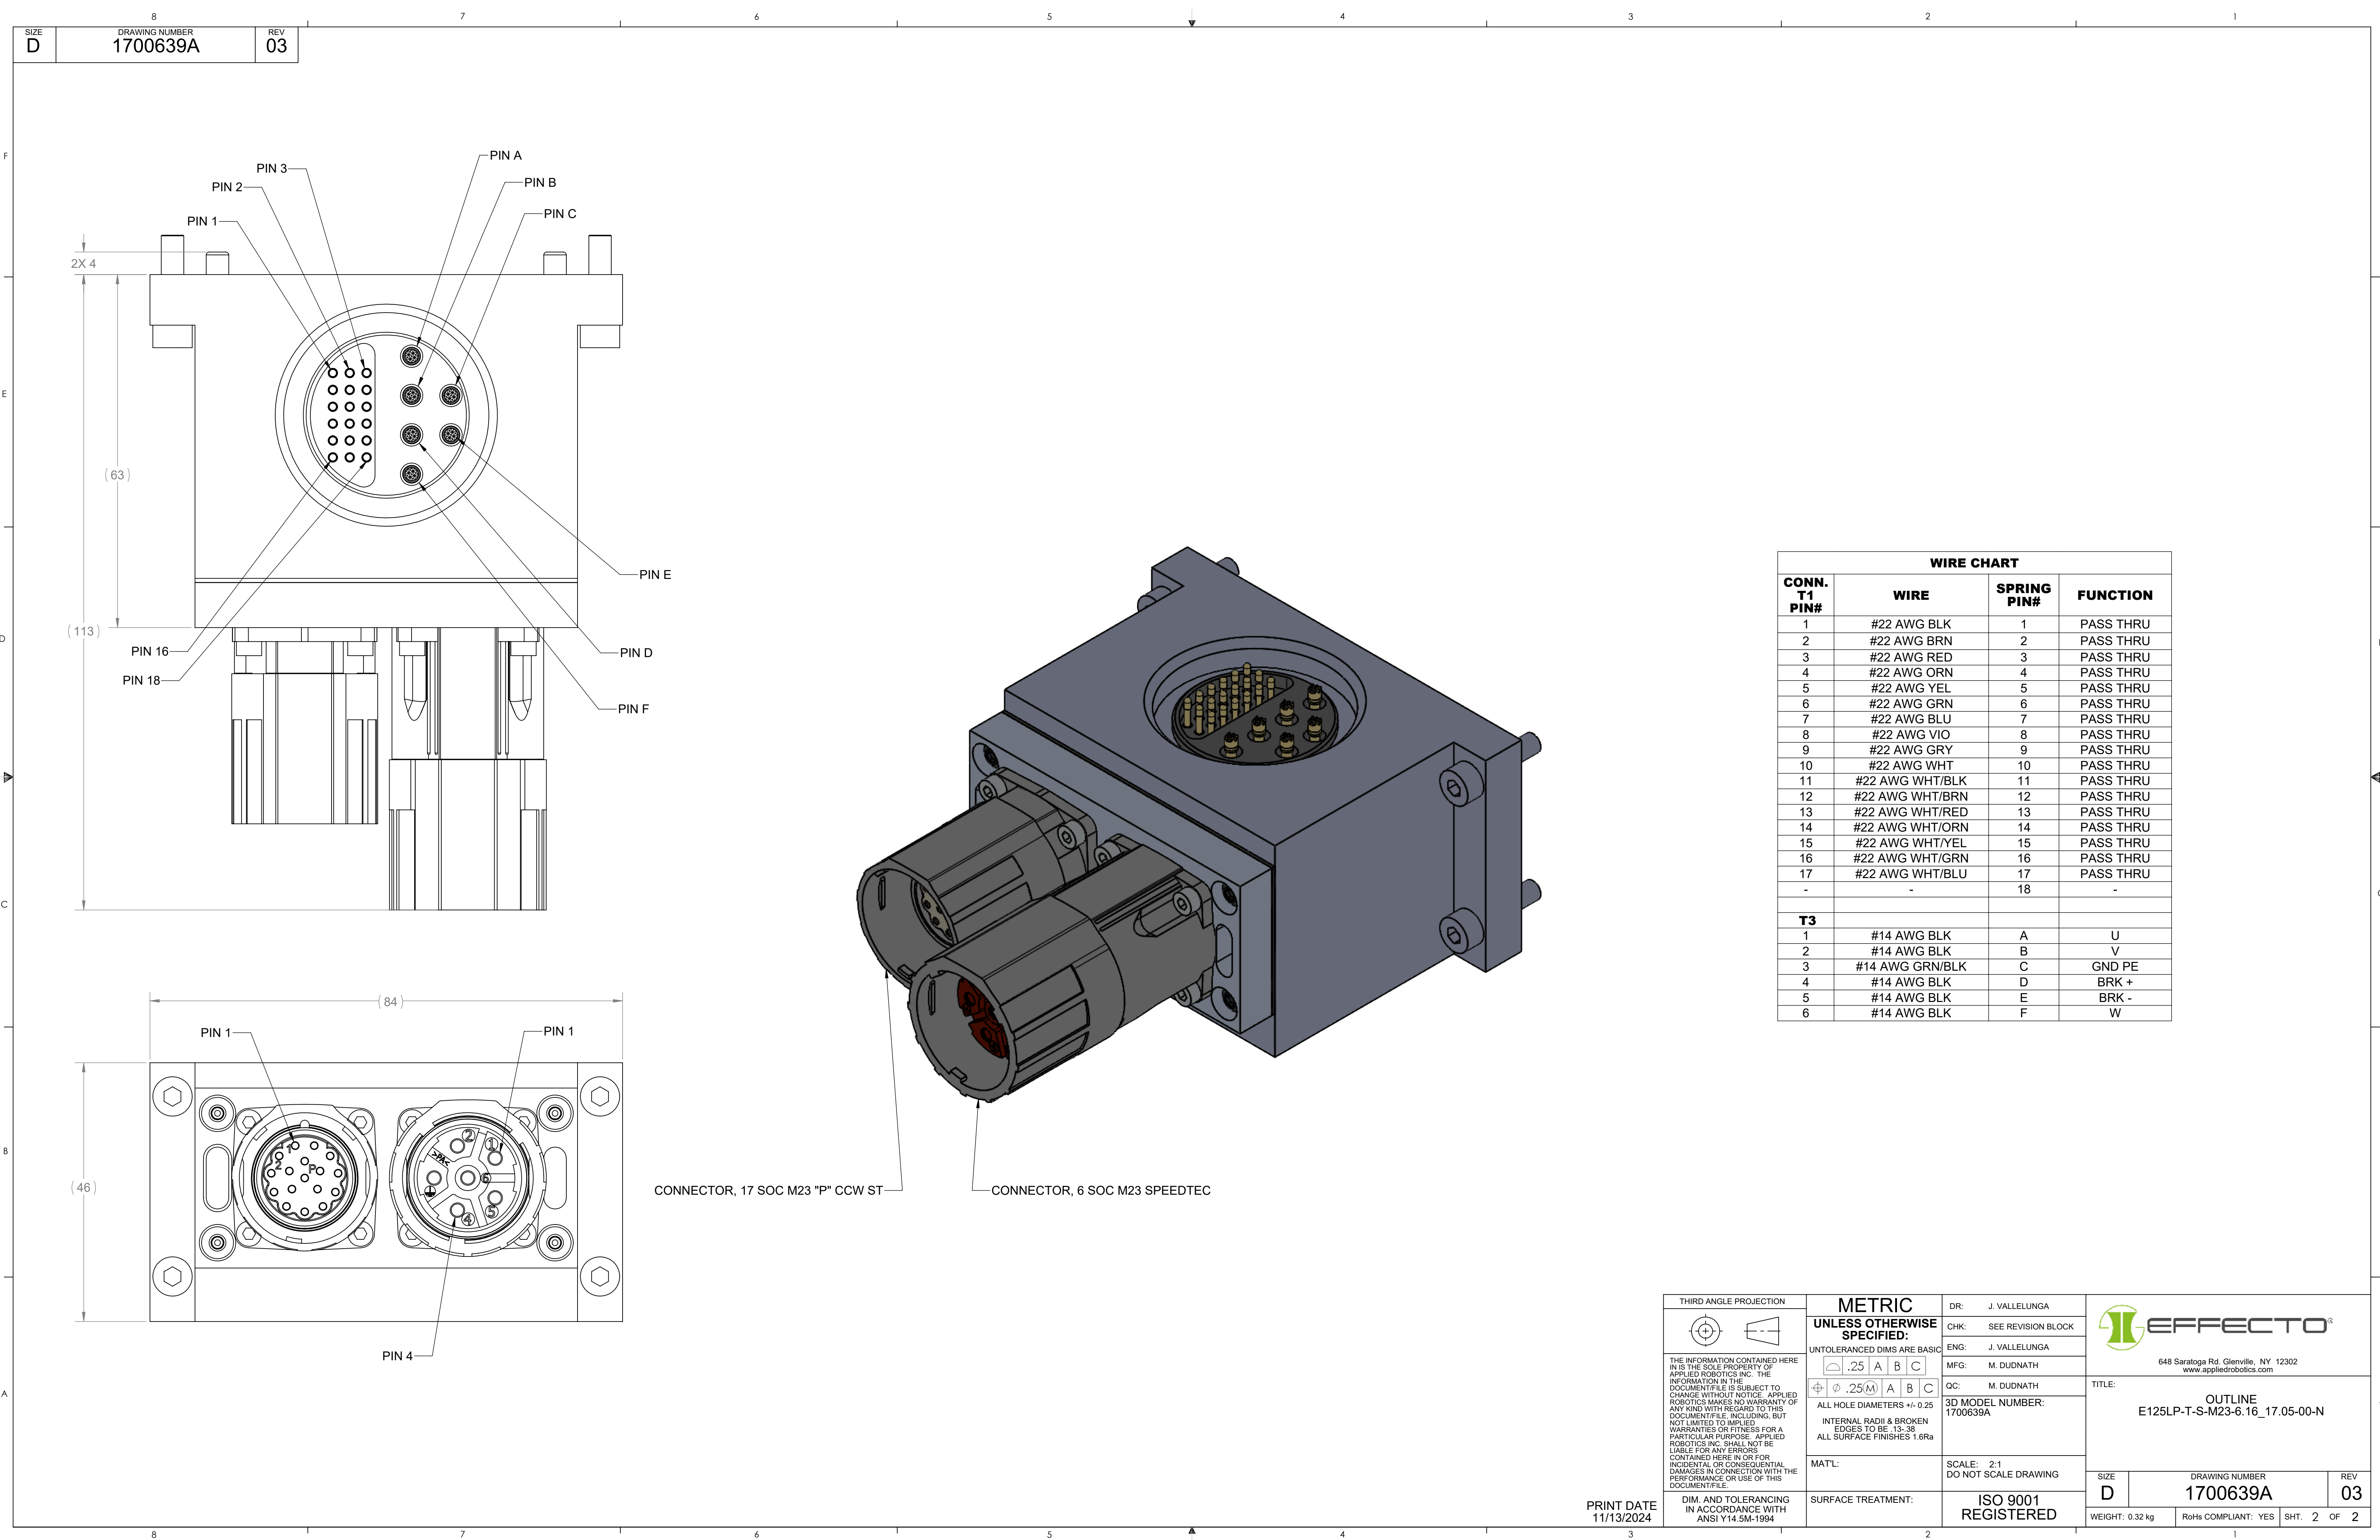

WIRE CHART			
CONN. T1 PIN#	WIRE	SPRING PIN#	FUNCTION
1	#22 AWG BLK	1	PASS THRU
2	#22 AWG BRN	2	PASS THRU
3	#22 AWG RED	3	PASS THRU
4	#22 AWG ORN	4	PASS THRU
5	#22 AWG YEL	5	PASS THRU
6	#22 AWG GRN	6	PASS THRU
7	#22 AWG BLU	7	PASS THRU
8	#22 AWG VIO	8	PASS THRU
9	#22 AWG GRY	9	PASS THRU
10	#22 AWG WHT	10	PASS THRU
11	#22 AWG WHT/BLK	11	PASS THRU
12	#22 AWG WHT/BRN	12	PASS THRU
13	#22 AWG WHT/RED	13	PASS THRU
14	#22 AWG WHT/ORN	14	PASS THRU
15	#22 AWG WHT/YEL	15	PASS THRU
16	#22 AWG WHT/GRN	16	PASS THRU
17	#22 AWG WHT/BLU	17	PASS THRU
-	-	18	-
T3			
1	#14 AWG BLK	A	U
2	#14 AWG BLK	B	V
3	#14 AWG GRN/BLK	C	GND PE
4	#14 AWG BLK	D	BRK +
5	#14 AWG BLK	E	BRK -
6	#14 AWG BLK	F	W

THIRD ANGLE PROJECTION		METRIC		DR: J. VALLELUNGA			
THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE. APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HEREIN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.		UNLESS OTHERWISE SPECIFIED:		CHK: SEE REVISION BLOCK			
		UNTOLERANCED DIMS ARE BASIC		ENG: J. VALLELUNGA			
		⌀ ⌀ .25 M A B C		MFG: M. DUDNATH		TITLE:	
		⌀ ⌀ .25 M A B C		QC: M. DUDNATH			
		ALL HOLE DIAMETERS +/- 0.25		3D MODEL NUMBER: 1700639A		OUTLINE E125LP-T-S-M23-6.16_17.05-00-N	
		INTERNAL RADII & BROKEN EDGES TO BE .13-.38		SCALE: 2:1 DO NOT SCALE DRAWING			
		ALL SURFACE FINISHES 1.6Ra					
		MAT'L:		ISO 9001 REGISTERED		SIZE	
		SURFACE TREATMENT:				DRAWING NUMBER	
						1700639A	
						REV	
						03	
						WEIGHT: 0.32 kg	
						RoHS COMPLIANT: YES	
						SHT. 2 OF 2	

PRINT DATE
11/13/2024