




8X G1/8
AVAILABLE USER
PNEUMATIC CONNECTIONS
FITTINGS MUST BE PUSH
TO CONNECT WITH INTERNAL HEX

8X G1/8
AVAILABLE USER
PNEUMATIC CONNECTIONS

THIRD ANGLE PROJECTION		METRIC UNLESS OTHERWISE SPECIFIED:		DR: P. SLAVINSKI											
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE. APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HERE IN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.		UNTOLERANCED DIMS ARE BASIC		CHK: SEE REVISION BLOCK											
		<table><tr><td>$\frac{\phi}{\phi}$</td><td>.25</td><td>A</td><td>B</td><td>C</td></tr><tr><td>$\frac{\phi}{\phi}$</td><td>.25(M)</td><td>A</td><td>B</td><td>C</td></tr></table>		$\frac{\phi}{\phi}$	.25	A	B	C	$\frac{\phi}{\phi}$	.25(M)	A	B	C	ENG: P. SLAVINSKI	
		$\frac{\phi}{\phi}$	.25	A	B	C									
$\frac{\phi}{\phi}$	.25(M)	A	B	C											
ALL HOLE DIAMETERS +/- 0.25 INTERNAL RADII & BROKEN EDGES TO BE .13-.38 ALL SURFACE FINISHES 1.6Ra		MFG: S. WHIPPLE													
DIM. AND TOLERANCING IN ACCORDANCE WITH ASMEY 14.5-2009		MAT'L: Material <not specified>		QC: S. WHIPPLE											
		SURFACE TREATMENT:		3D MODEL NUMBER: 2400886A											
				SCALE: 1:1 DO NOT SCALE DRAWING											
				ISO 9001 REGISTERED											

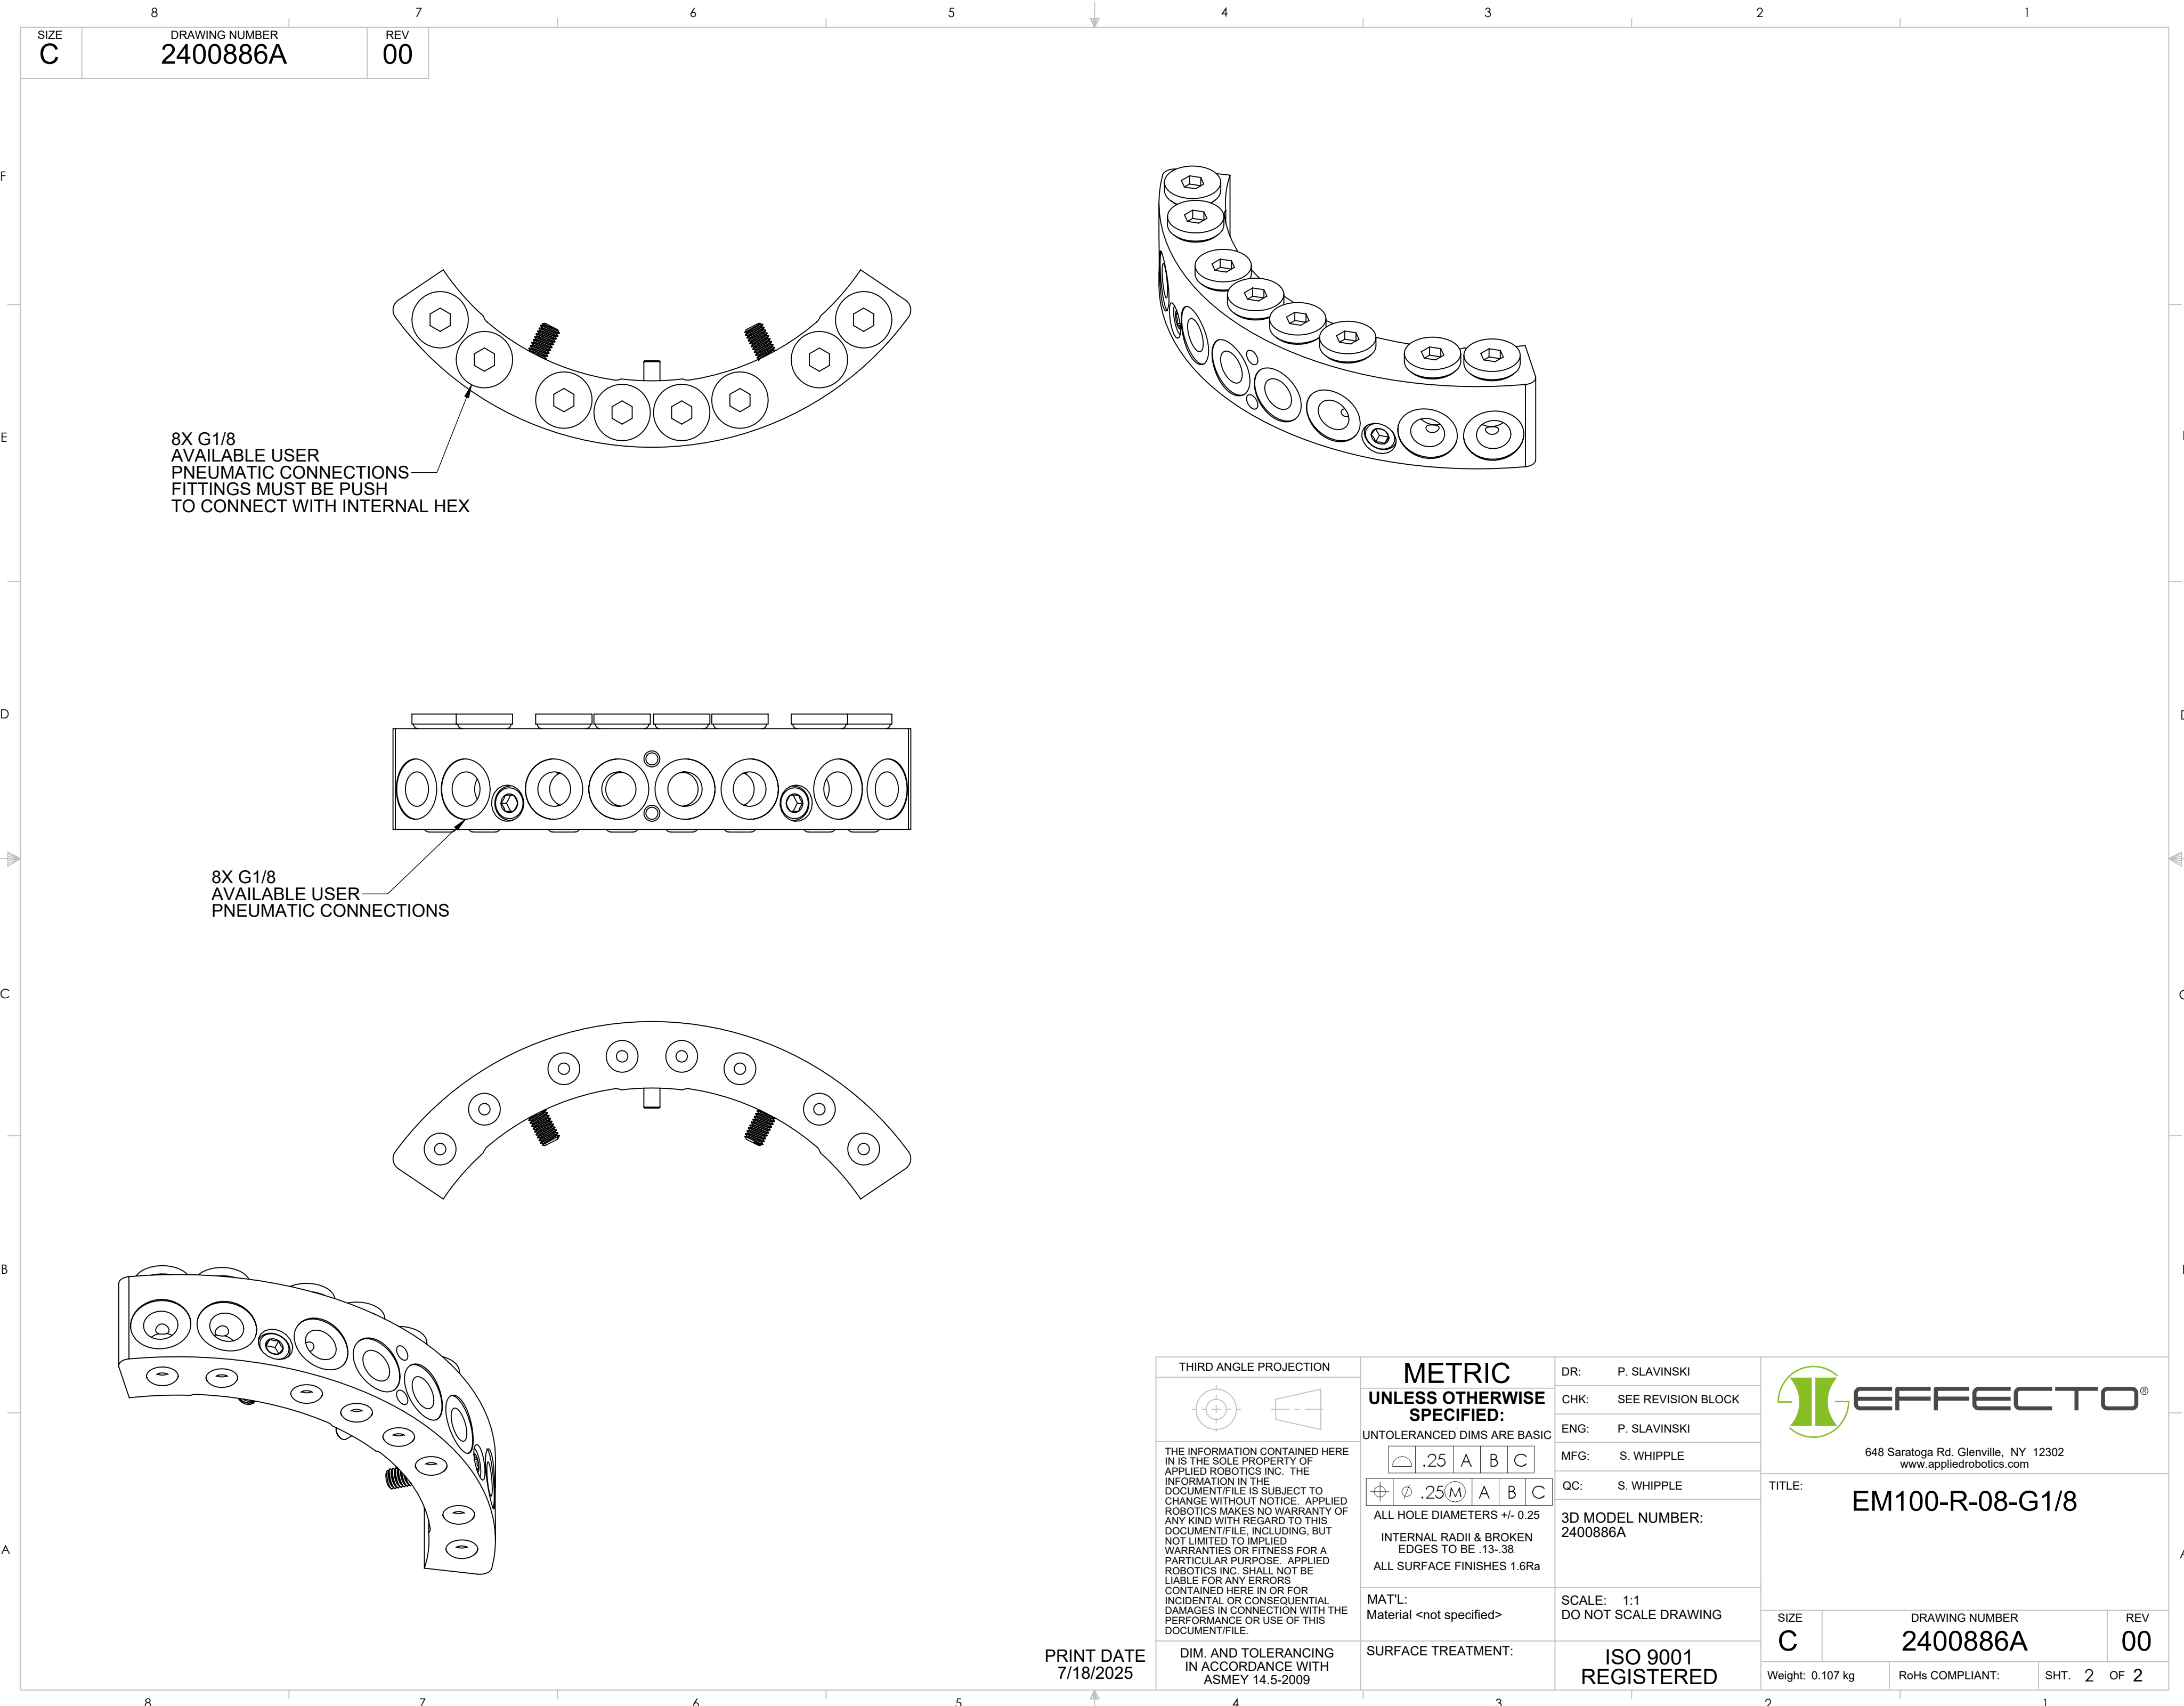

648 Saratoga Rd. Glenville, NY 12302
www.appliedrobotics.com

TITLE: **EM100-R-08-G1/8**

SIZE C	DRAWING NUMBER 2400886A	REV 00
Weight: 0.107 kg	RoHs COMPLIANT:	SHT. 2 OF 2

PRINT DATE
7/18/2025