
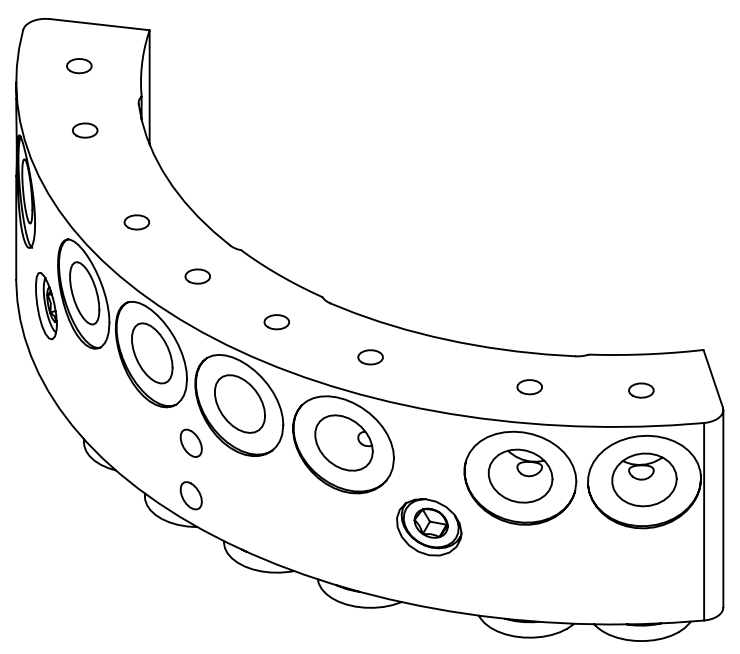
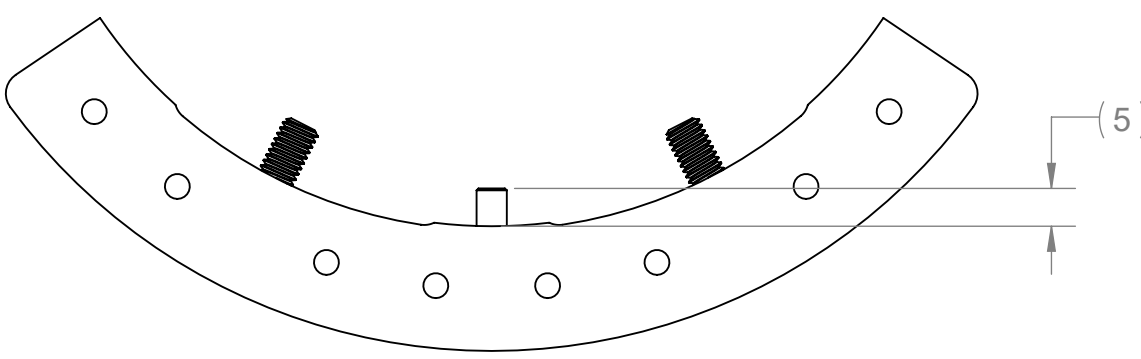
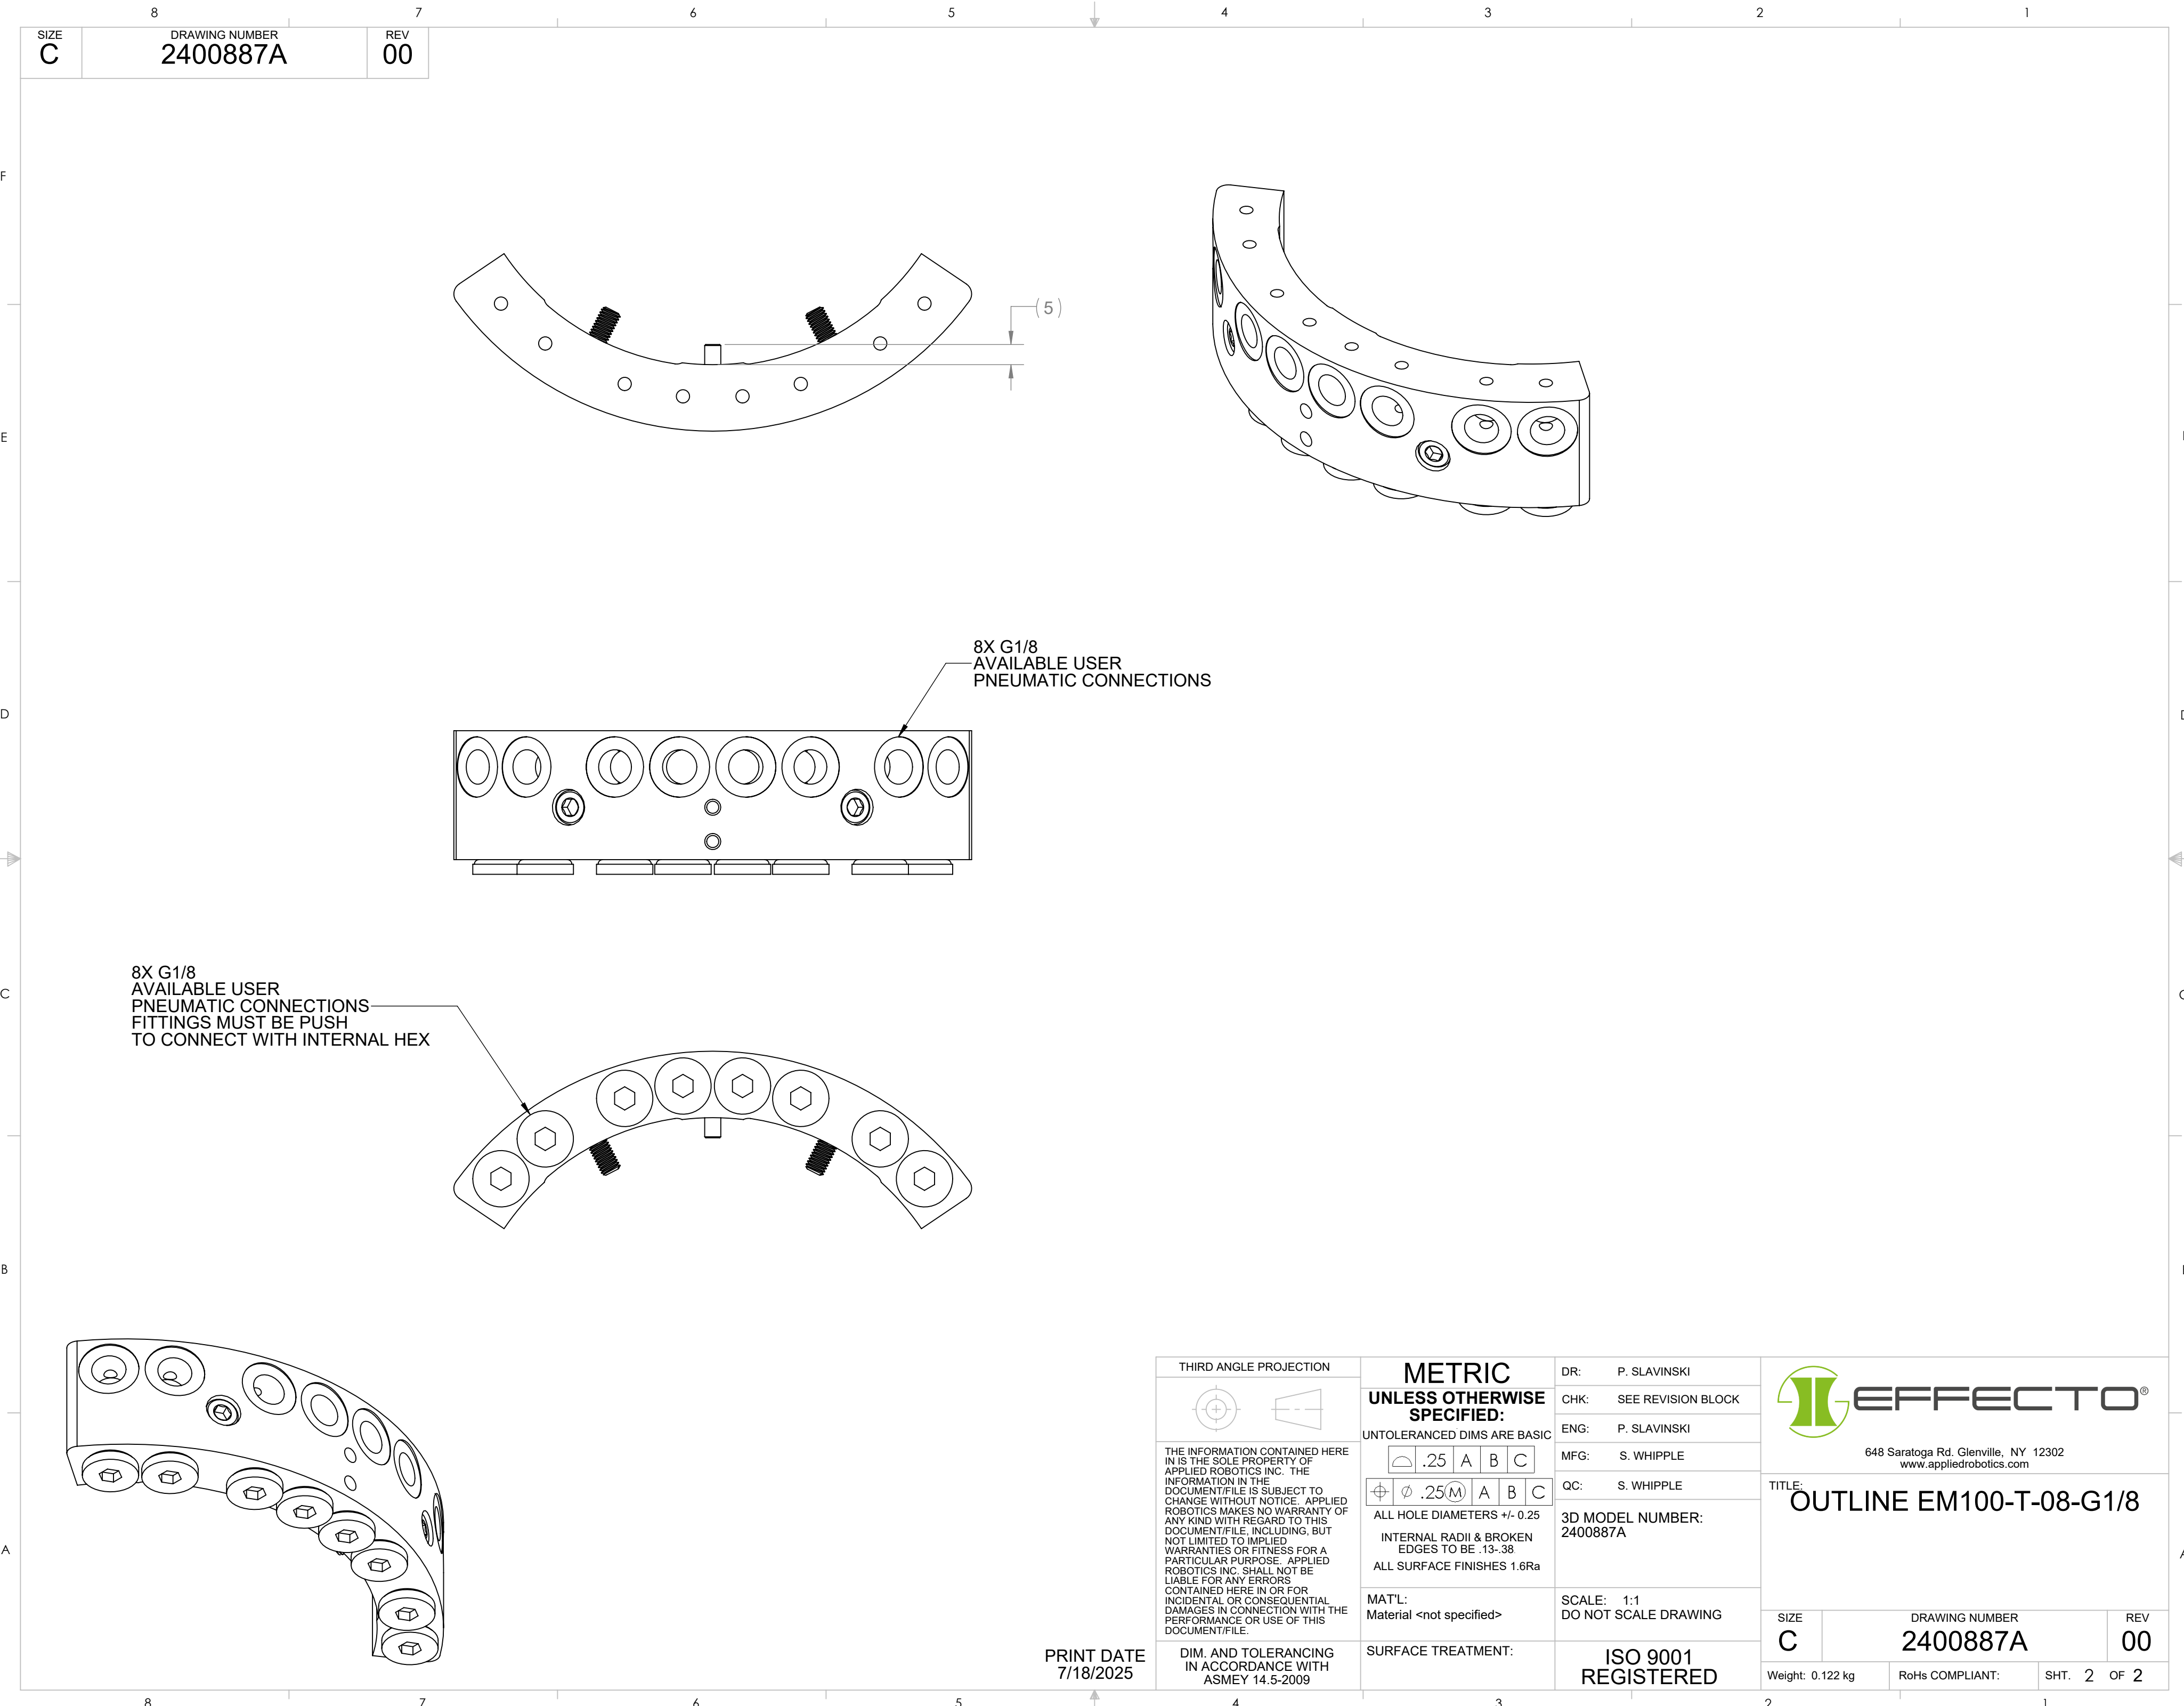
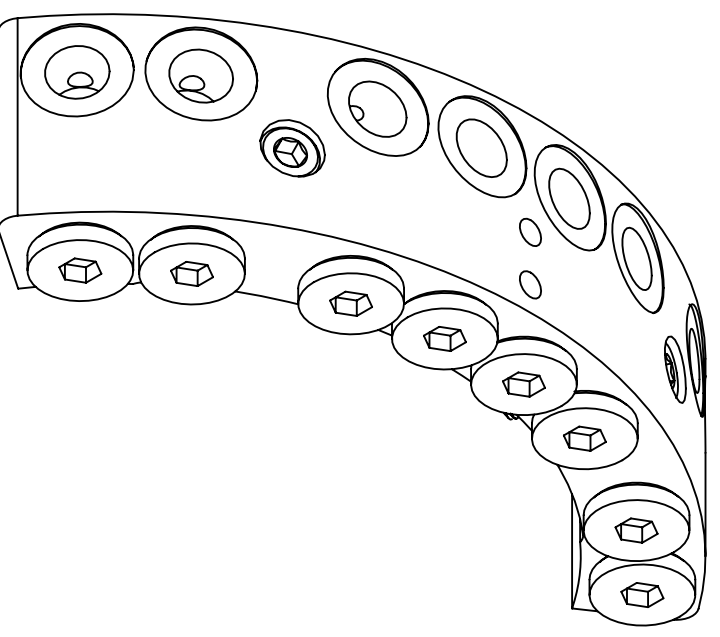
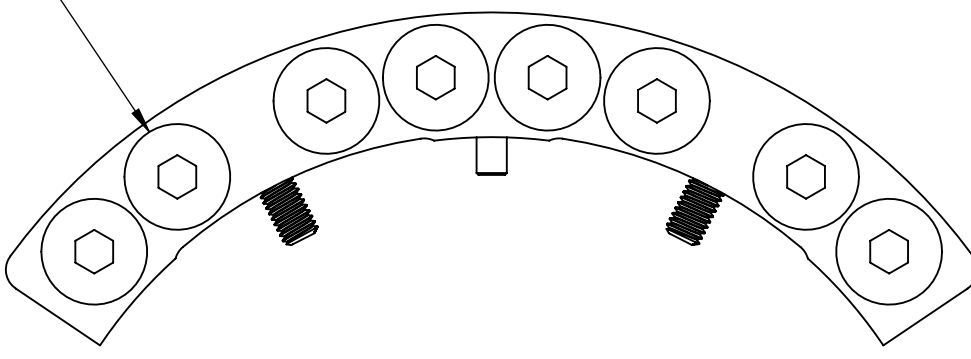


8X G1/8
AVAILABLE USER
PNEUMATIC CONNECTIONS

8X G1/8
AVAILABLE USER
PNEUMATIC CONNECTIONS
FITTINGS MUST BE PUSH
TO CONNECT WITH INTERNAL HEX



THIRD ANGLE PROJECTION		METRIC UNLESS OTHERWISE SPECIFIED: UNTOLERANCED DIMS ARE BASIC		DR: P. SLAVINSKI	 648 Saratoga Rd. Glenville, NY 12302 www.appliedrobotics.com				
 THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE. APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HERE IN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.		CHK: SEE REVISION BLOCK		ENG: P. SLAVINSKI					
		MFG: S. WHIPPLE		QC: S. WHIPPLE					
		3D MODEL NUMBER: 2400887A							
DIM. AND TOLERANCING IN ACCORDANCE WITH ASMEY 14.5-2009		 .25 A B C  φ .25 (M) A B C ALL HOLE DIAMETERS +/- 0.25 INTERNAL RADII & BROKEN EDGES TO BE .13-.38 ALL SURFACE FINISHES 1.6Ra		SCALE: 1:1 DO NOT SCALE DRAWING		TITLE: OUTLINE EM100-T-08-G1/8			
		MAT'L: Material <not specified>							
		SURFACE TREATMENT:		ISO 9001 REGISTERED					
				SIZE C		DRAWING NUMBER 2400887A		REV 00	
				Weight: 0.122 kg		RoHs COMPLIANT:		SHT. 2 OF 2	