


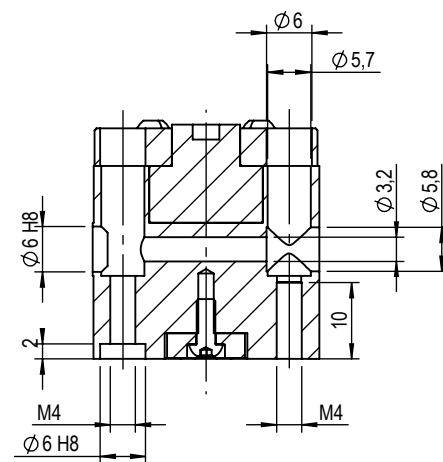
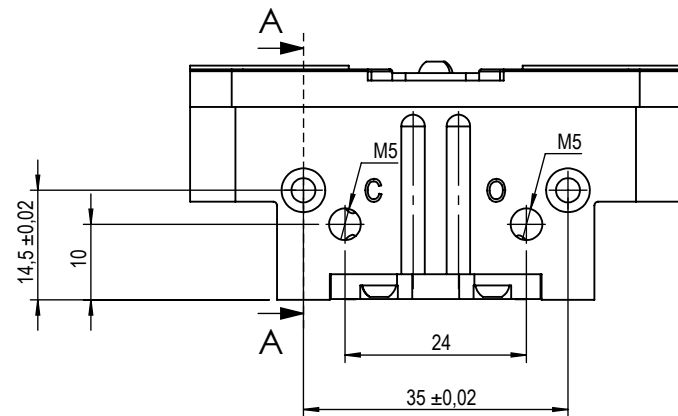
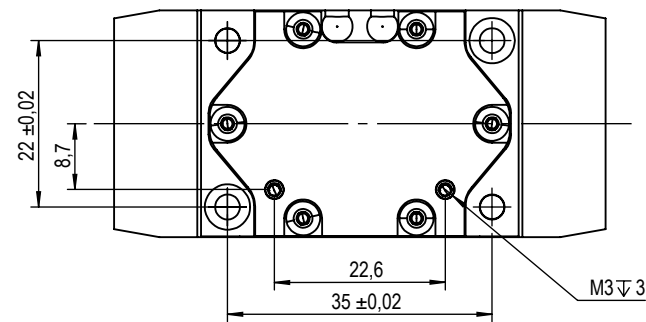



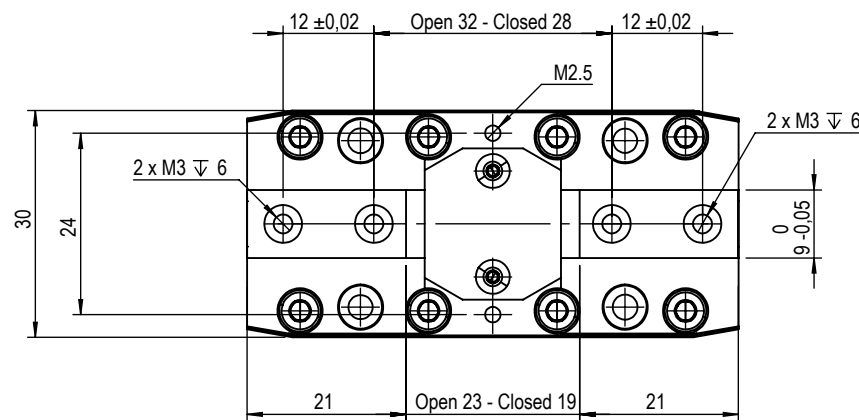


SEZIONE A-A
SCALA 1 : 1

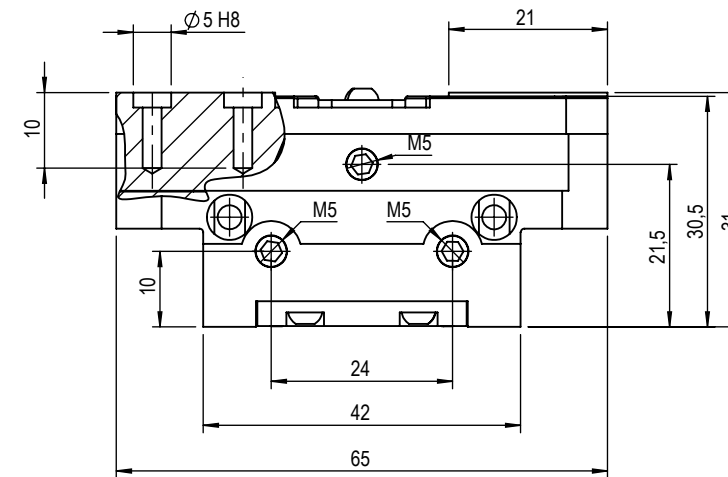

Stroke per Jaw: 2 mm
Closing Force: 220+220 N
Opening Force: 240+240 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 4 cm³

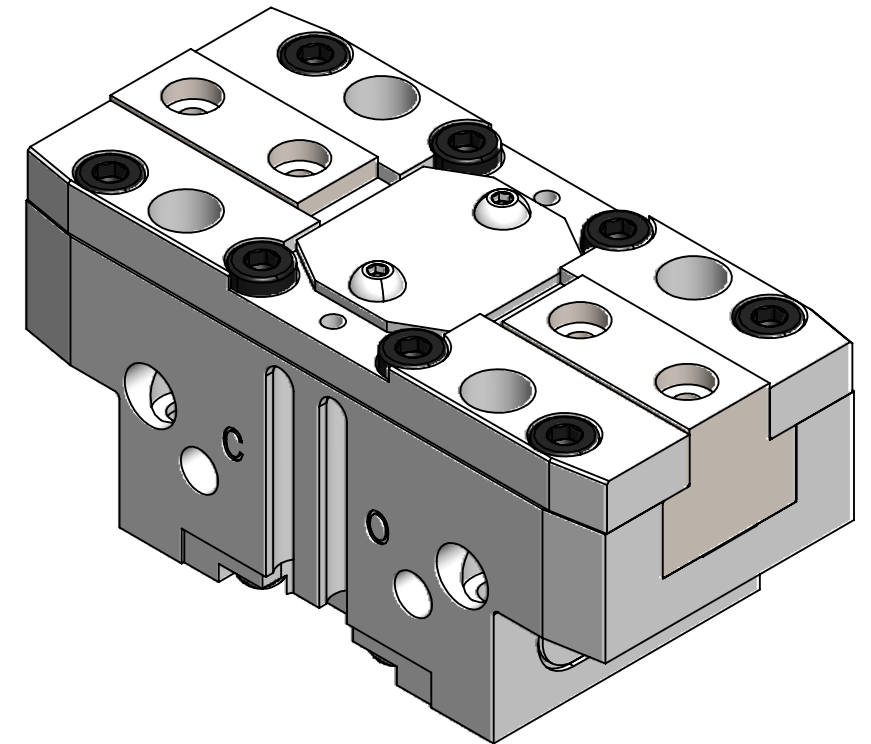

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE. FIRST ANGLE PROJECTION 		Eng: 23/04/2026		Commercial Description: HPG-205-P-2-U-SM-8-P-B-S	
		PROD:M.Tozzini 23/04/2026			
		QC out:-		Description: Gripper HPG 205 S	
		Sales: - -			
		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number: HP205SCB	
		DATA: 23/04/2026		Weight: 0.19Kg	
				Sheet: 1 of 2	
				Rev:00	