
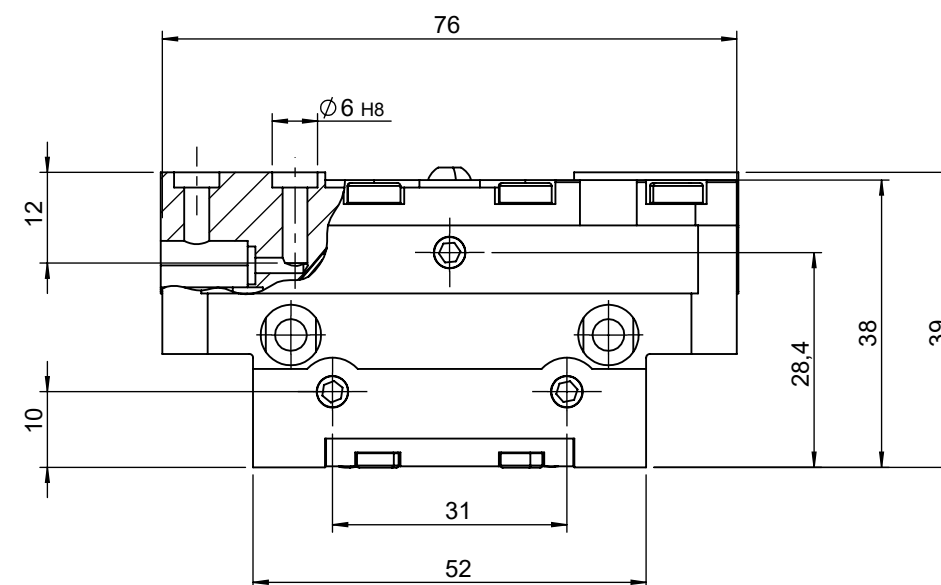


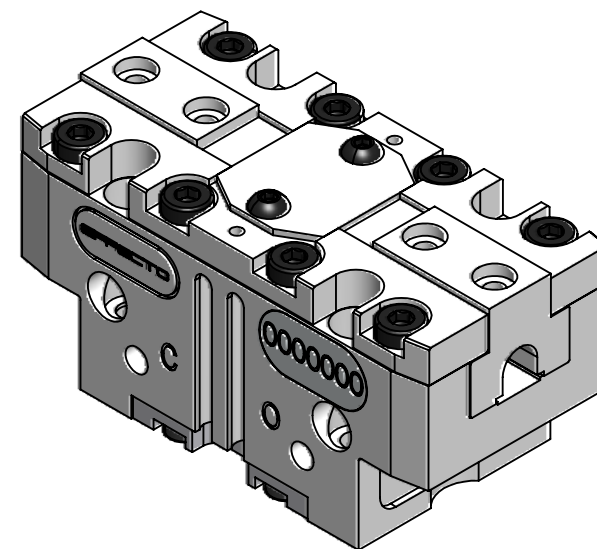

Stroke per Jaw: 6 mm

Closing Force: $175+175\text{ N}$

Opening Force: $190+190\text{ N}$

Repeat accuracy: ± 0.01 mm

Nominal Operating Pressure: 6 bar

Max Operating Pressure: 8 bar

Fluid consumption double stroke: 10 cm³



Via Roma 141-143
28017 San Maurizio d'Opaglio (NO)
Tel. +39 032296142

Via Don Primo Mazzolari 4
26012 Castelleone (CR):
Tel. +39 037435138
www.effectogroup.com

OUTLINE

DO NOT SCALE THE
DRAWING

THE INFORMATION CONTAINED HERE IN IS
THE SOLE PROPERTY OF EFFECTOGROUP S.P.A.
THE DIMENSIONS ARE INDICATIVE AND
SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL
IMPROVEMENTS.WE RESERVE THE RIGHT TO
MAKE CHANGES WITHOUT NOTICE.

Eng: 23/04/2026

PROD:M.Tozzini 23/04/2026

QC out:- -

Sales: - -

General Tolerances in accordance with
ISO 2768-m H
CENTERING HOLE: ISO 6411

DATA: 23/04/2026

Commercial Description:

HPG-206-P-6-U-SM-8-P-B-S

Description:

Gripper HPG 206

Part Number:
HP206NCL

Weight: 0.31Kg

Sheet: 2 of 2

Rev:00

FIRST ANGLE PROJECTION

