


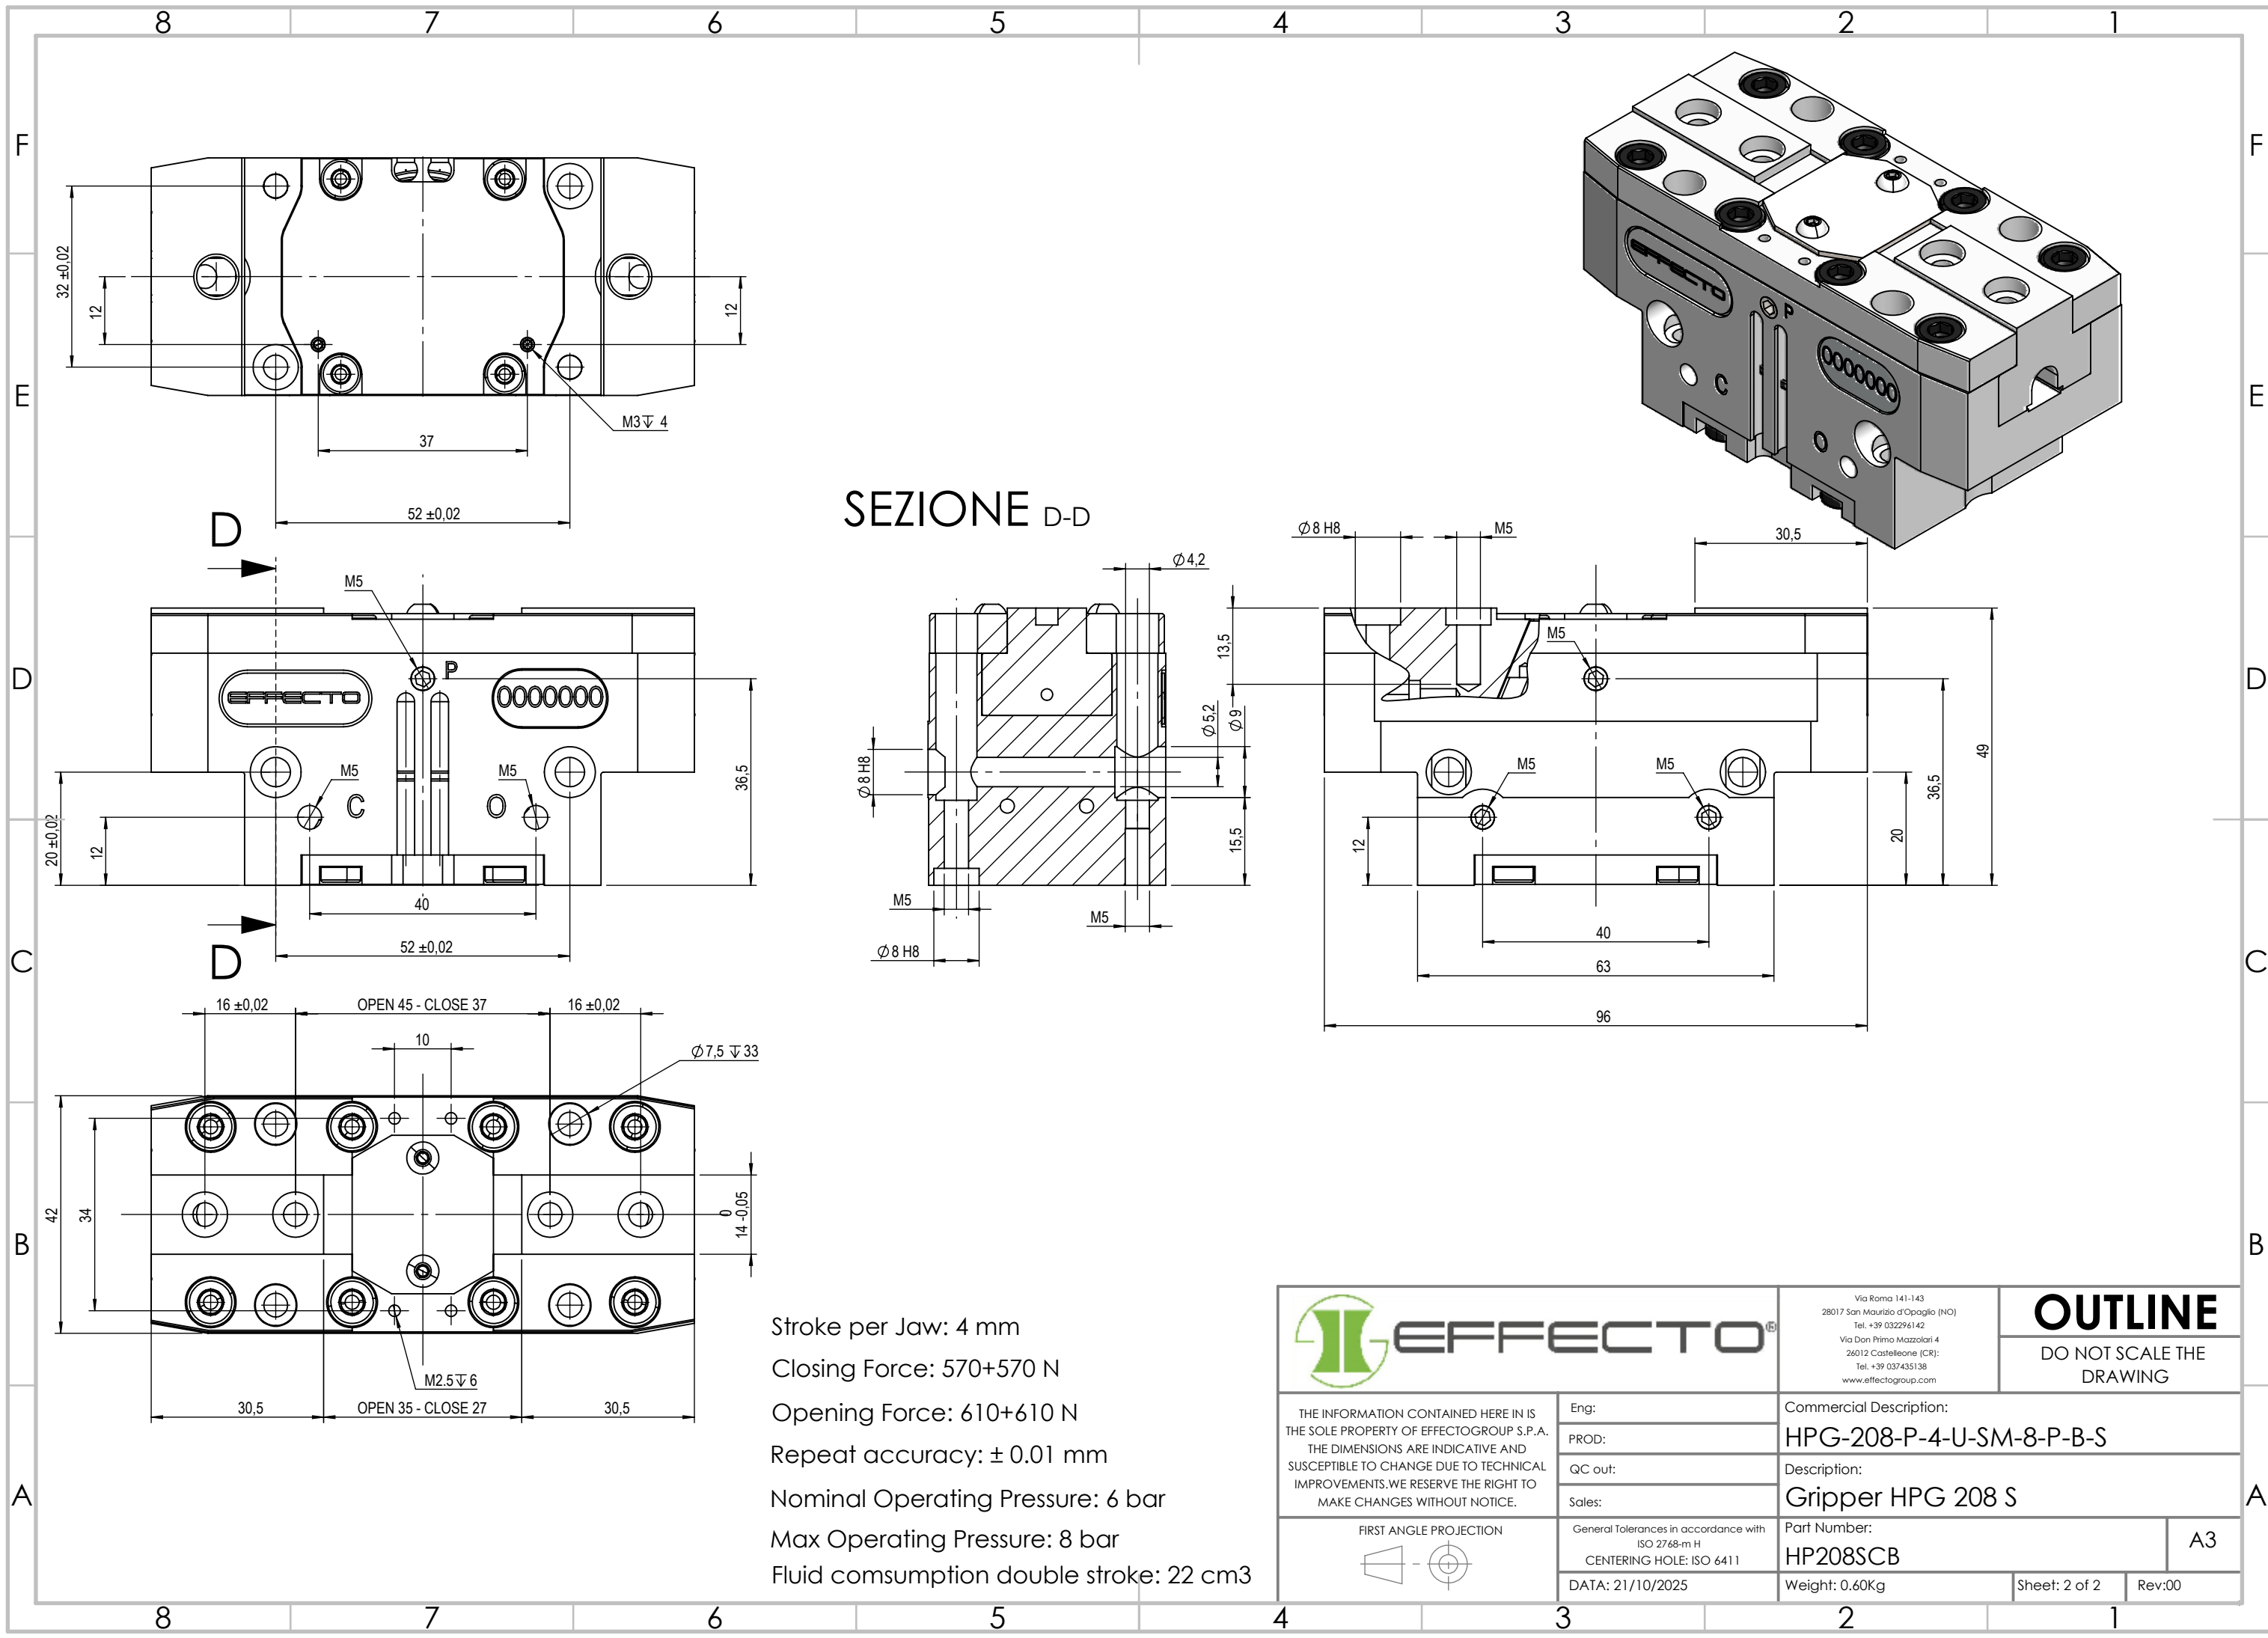

Stroke per Jaw: 4 mm
Closing Force: 570+570 N
Opening Force: 610+610 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 22 cm3

		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR): Tel. +39 037435138 www.effectogroup.com		OUTLINE	
				DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng:	Commercial Description: HPG-208-P-4-U-SM-8-P-B-S			
	PROD:				
	QC out:	Description: Gripper HPG 208 S			
	Sales:				
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411	Part Number: HP208SCB		A3	
	DATA: 21/10/2025	Weight: 0.60Kg			
		Sheet: 2 of 2		Rev:00	