

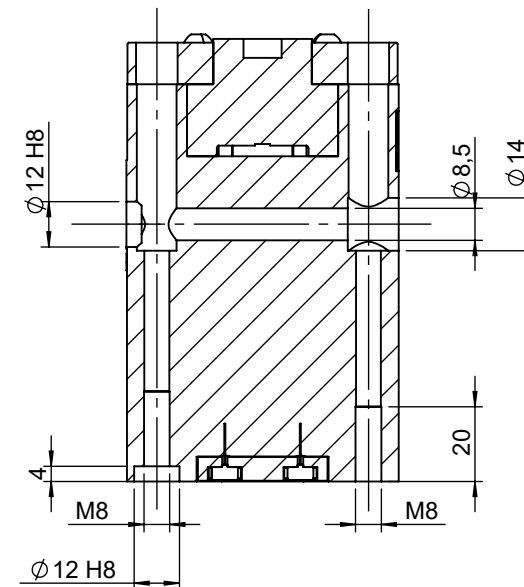


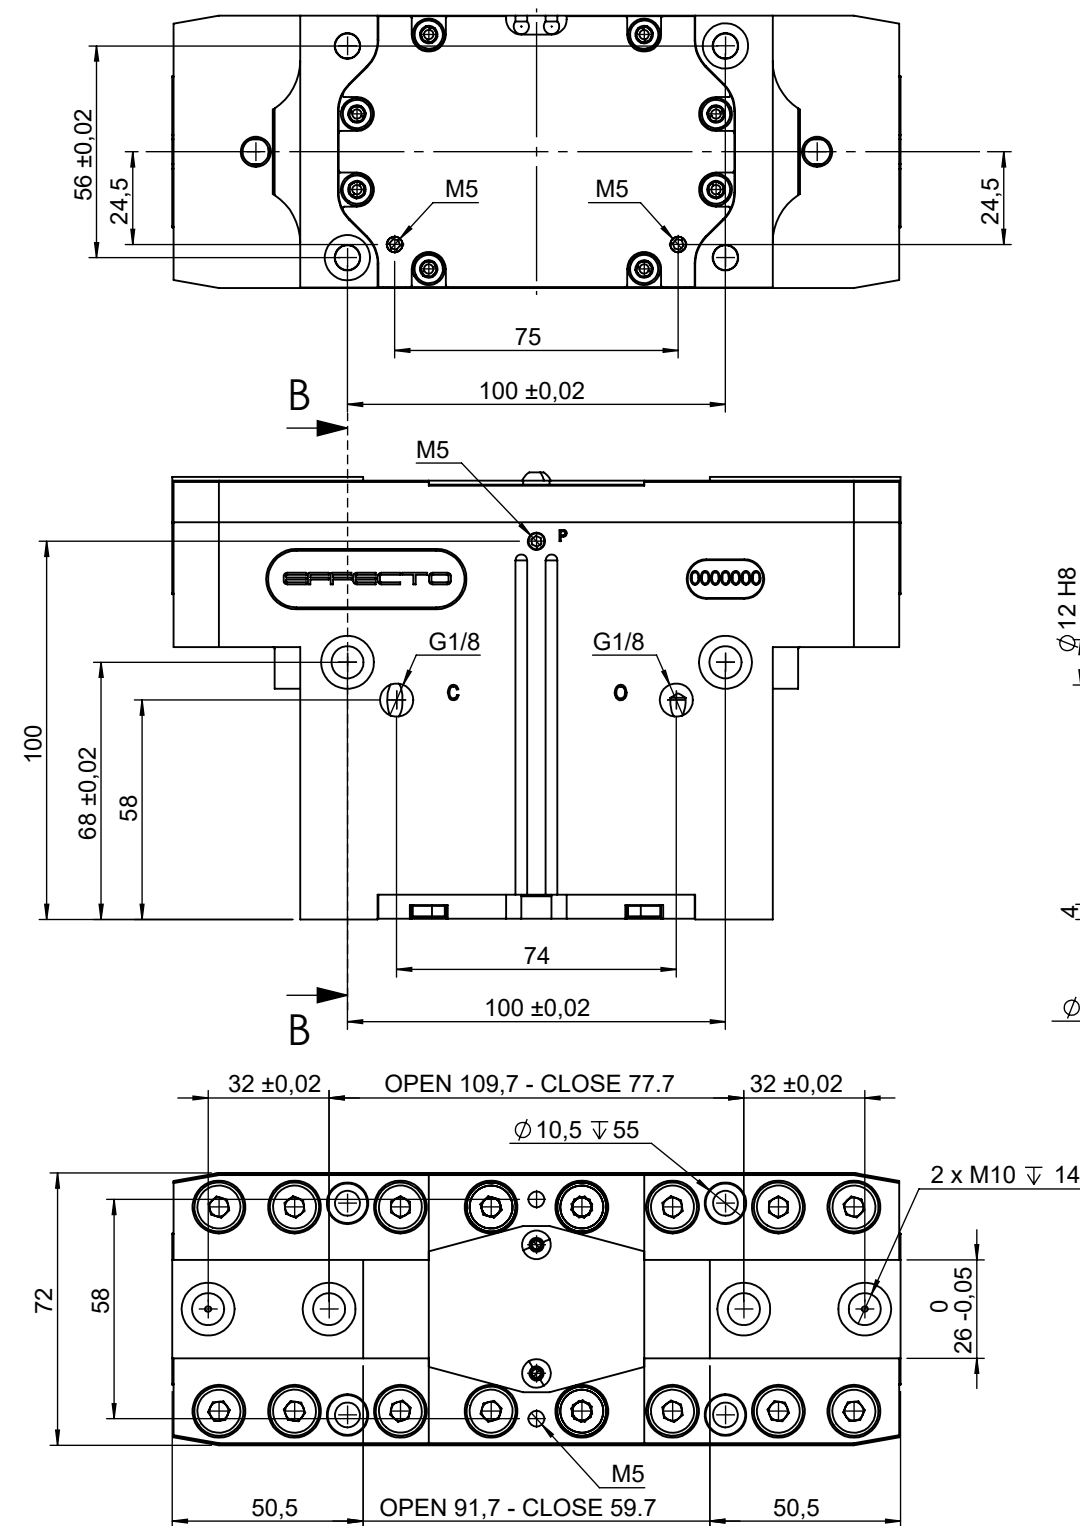

SECTION B-B

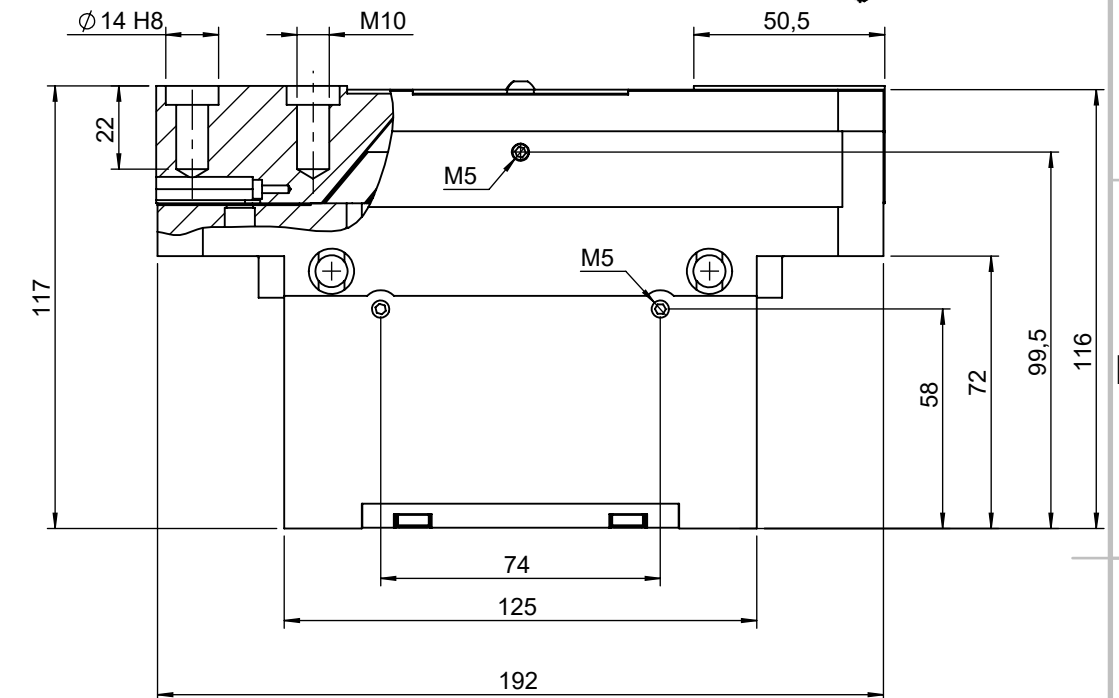

Stroke per Jaw: 16 mm
 Closing Force: 1380+1380 N
 Opening Force: 730+730 N
 Repeat accuracy: ± 0.015 mm
 Nominal Operating Pressure: 6 bar
 Max Operating Pressure: 8 bar
 Fluid consumption double stroke: 338 cm³

 EFFECTO [®]	Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
	THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Commercial Description: HPG-216-P-16-U-CM-8-P-B-S	
	FIRST ANGLE PROJECTION 		Description: Gripper HPG216 CM	
	Eng: 23/04/2026 PROD: M. Tozzini 24/04/2026 QC out: - Sales: - General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 08/05/2026		Part Number: HP216NCM	A3 Sheet: 2 of 2 Rev:00