

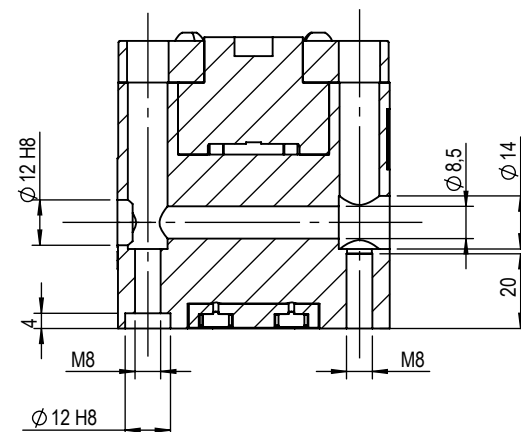
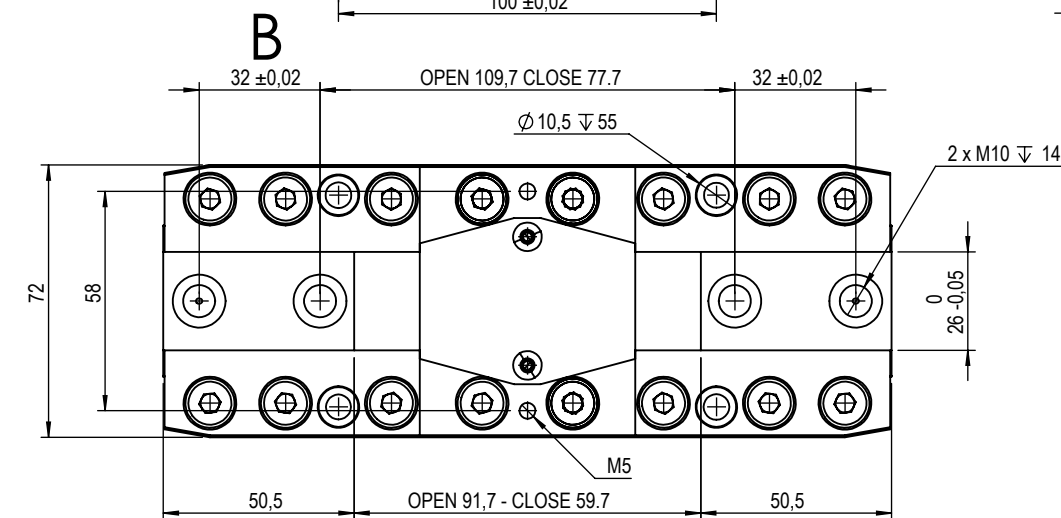
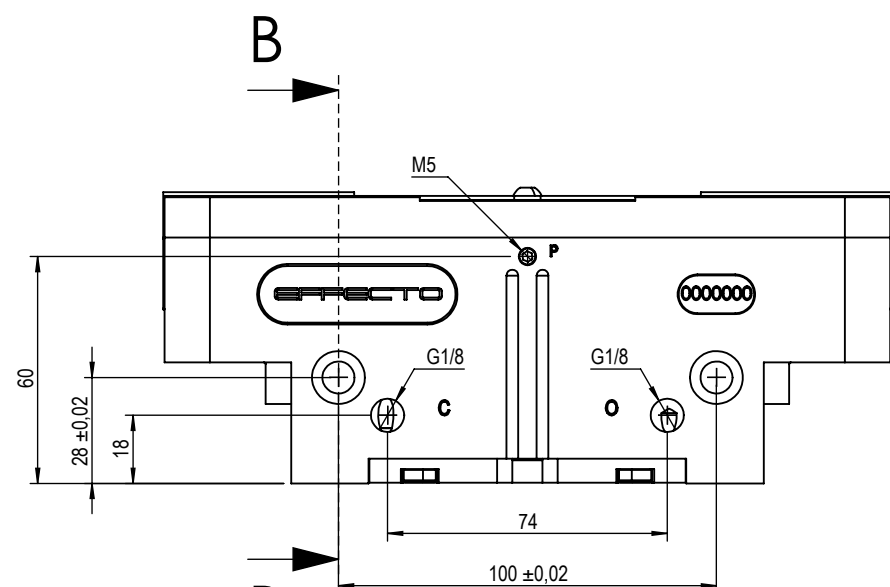
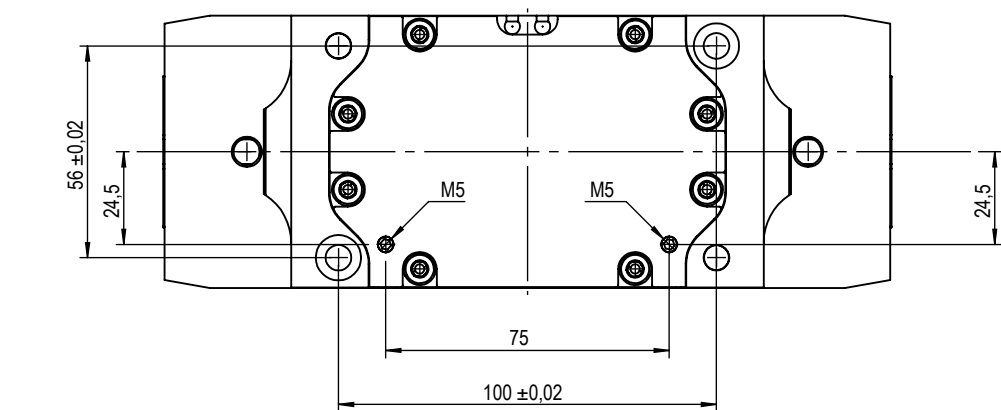
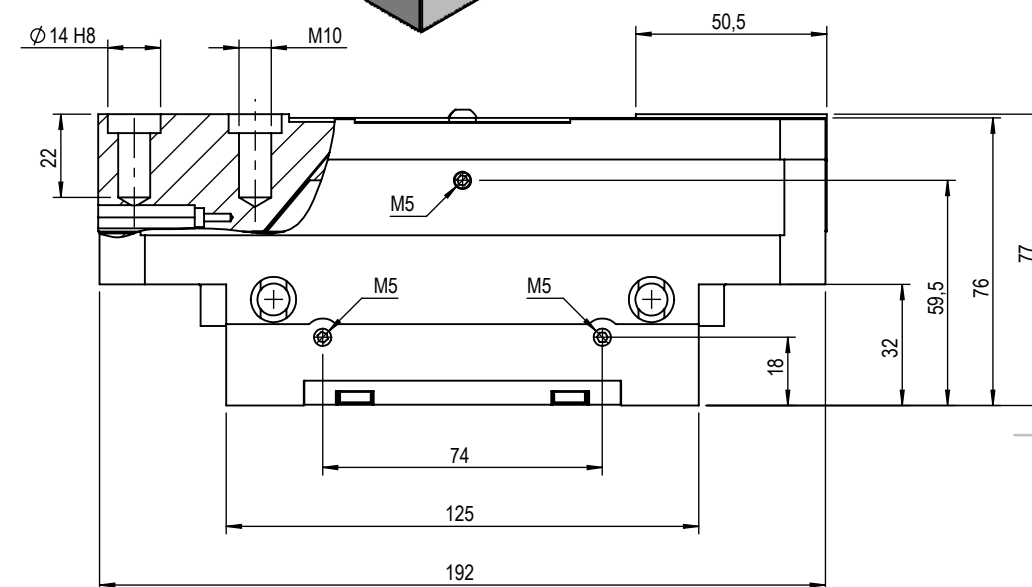


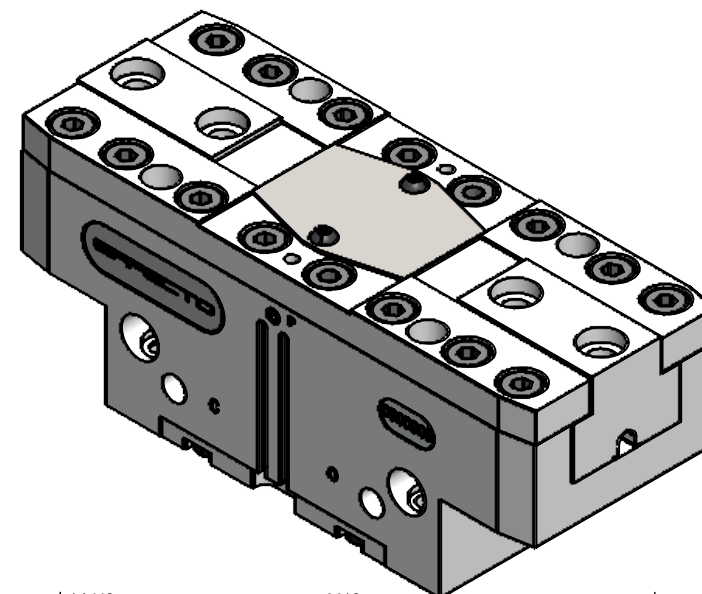

SEZIONE B-B



Stroke per Jaw: 16 mm
 Closing Force: 1100+1100 N
 Opening Force: 1150+1150 N
 Repeat accuracy: ± 0.015 mm
 Nominal Operating Pressure: 6 bar
 Max Operating Pressure: 8 bar
 Fluid consumption double stroke: 169 cm³

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR): Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 23/04/2026		Commercial Description:	
		PROD: M. Tozzini 24/04/2026		HPG-216-P-16-U-SM-8-P-B-S	
		QC out: M. Tozzini 24/04/2026		Description:	
 FIRST ANGLE PROJECTION		Sales:		Gripper HPG216	
		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:	
				HP216NCL	
DATA: 12/05/2026		Weight: 3.19Kg		Sheet: 2 of 2	Rev:00