

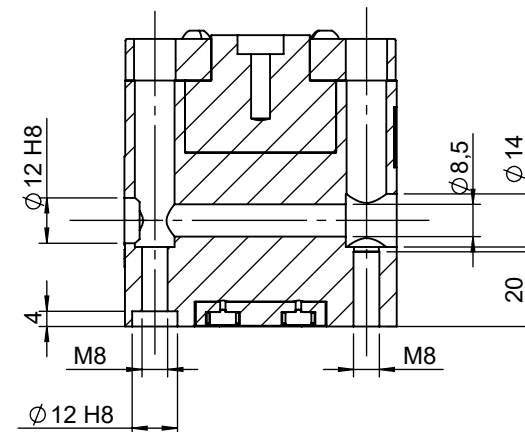
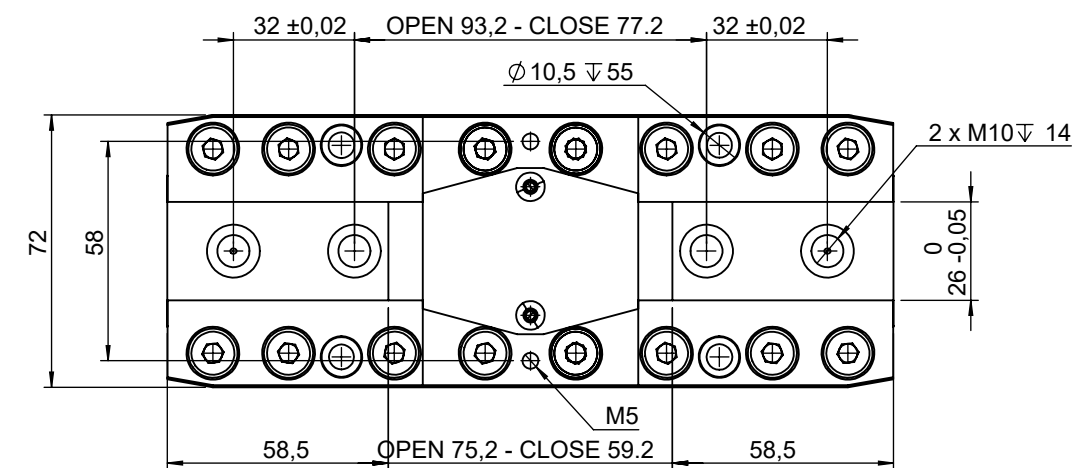
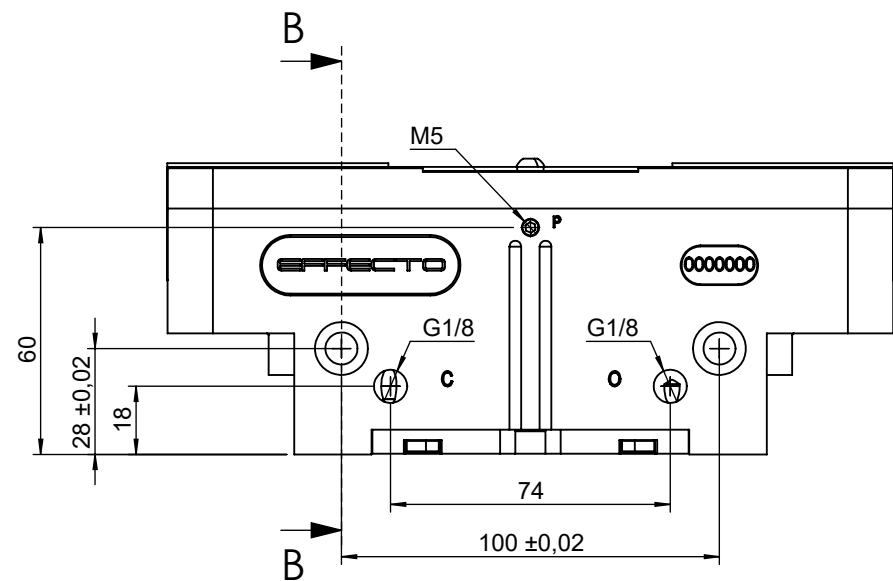
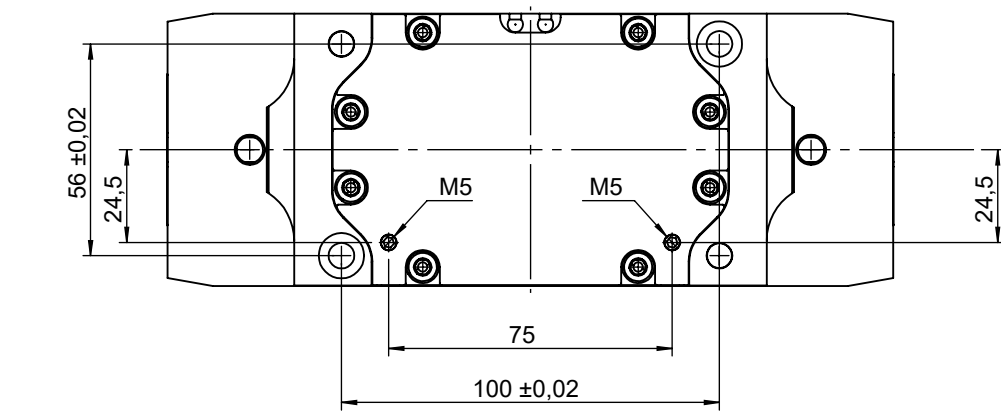
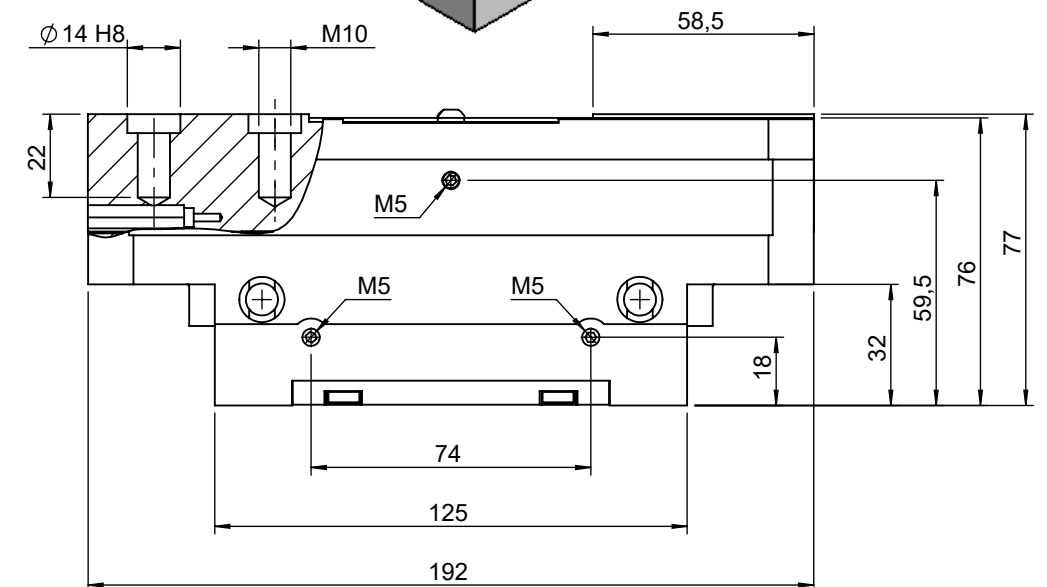


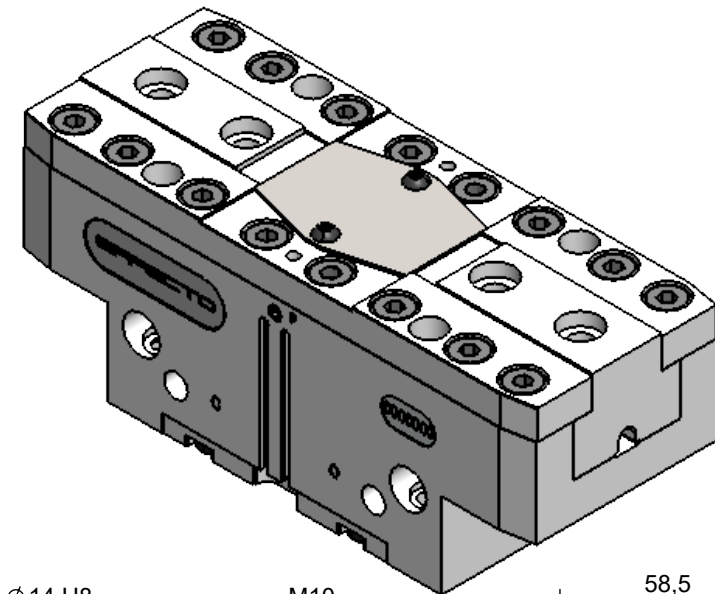

SECTION B-B



Stroke per Jaw: 8 mm
 Closing Force: 2200+2200 N
 Opening Force: 2300+2300 N
 Repeat accuracy: ± 0.015 mm
 Nominal Operating Pressure: 6 bar
 Max Operating Pressure: 8 bar
 Fluid consumption double stroke: 169 cm³

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR); Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 23/04/2026		Commercial Description: HPG-216-P-8-U-SM-8-P-B-S	
		PROD:M.Tozzini 24/04/2026			
		QC out:-		Description: Gripper HPG216 S	
Sales: - -					
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number: HP216SCB	
		DATA: 24/04/2026		A3	
		Weight: 3.29Kg		Sheet: 2 of 2	