


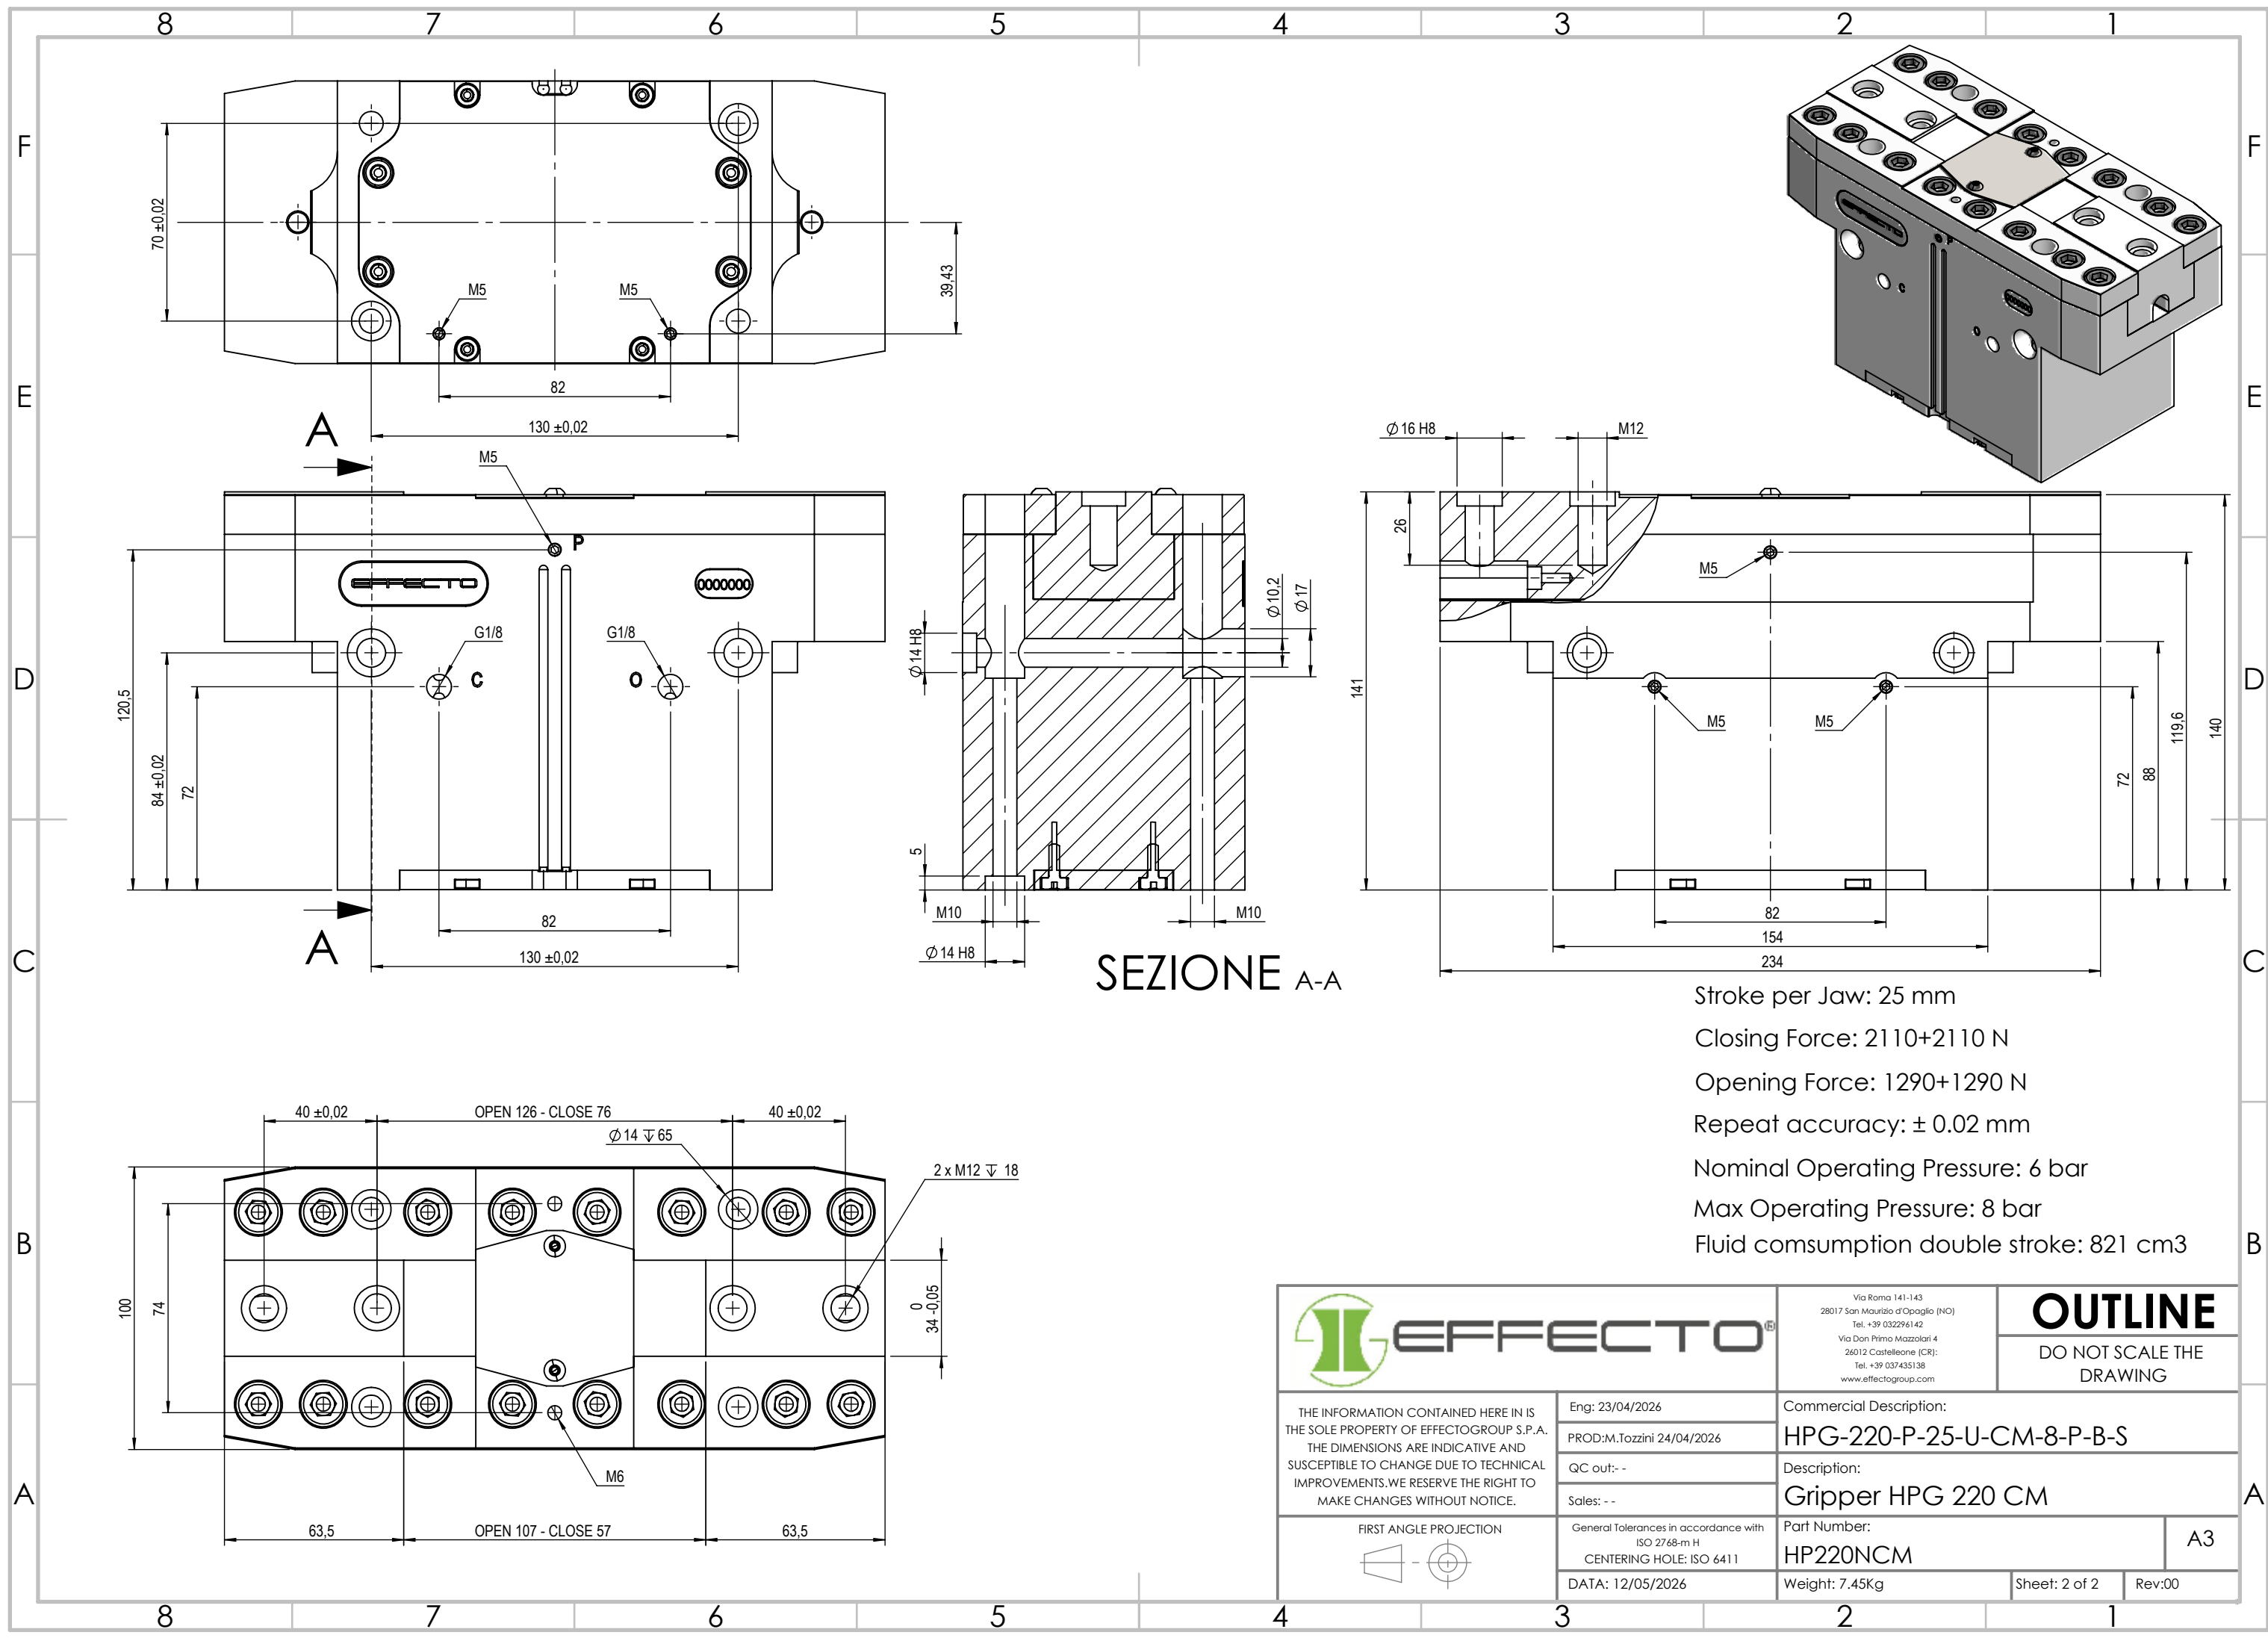

Stroke per Jaw: 25 mm
Closing Force: 2110+2110 N
Opening Force: 1290+1290 N
Repeat accuracy: ± 0.02 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 821 cm3

 EFFECTO THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		OUTLINE DO NOT SCALE THE DRAWING	
		Commercial Description: HPG-220-P-25-U-CM-8-P-B-S Description: Gripper HPG 220 CM	
FIRST ANGLE PROJECTION 		Eng: 23/04/2026 PROD: M. Tozzini 24/04/2026 QC out: - Sales: - General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 12/05/2026	Part Number: HP220NCM Weight: 7.45Kg Sheet: 2 of 2 Rev:00