

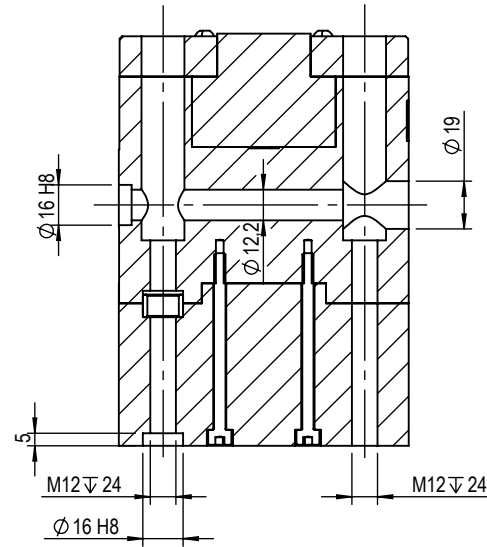
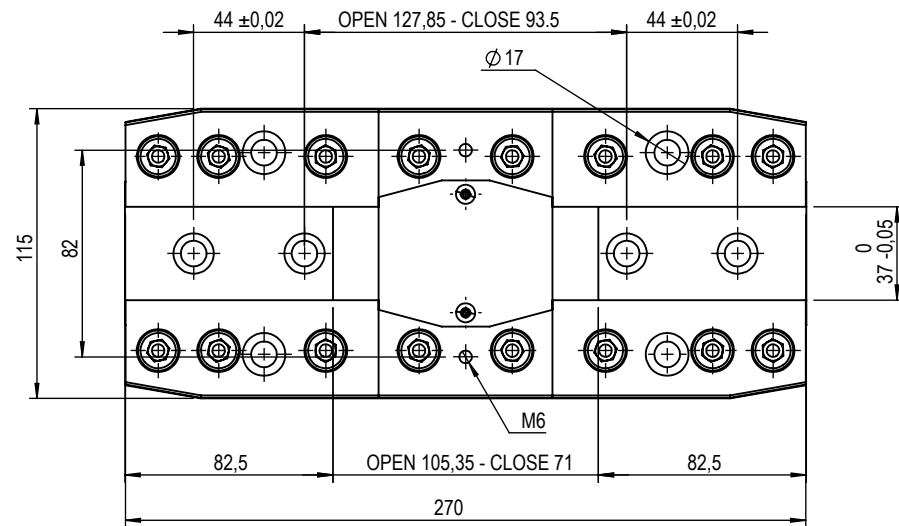
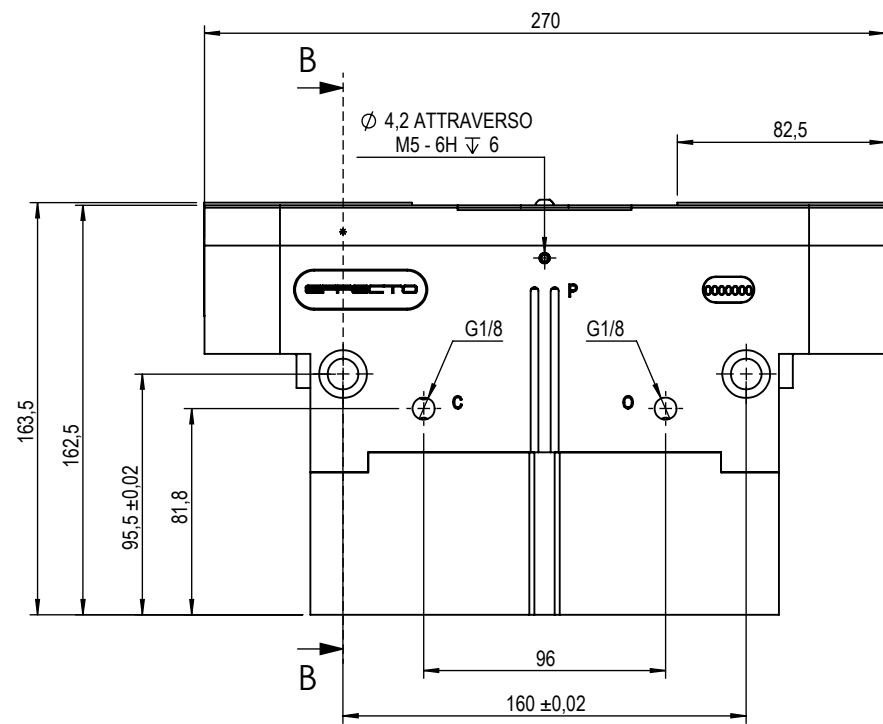
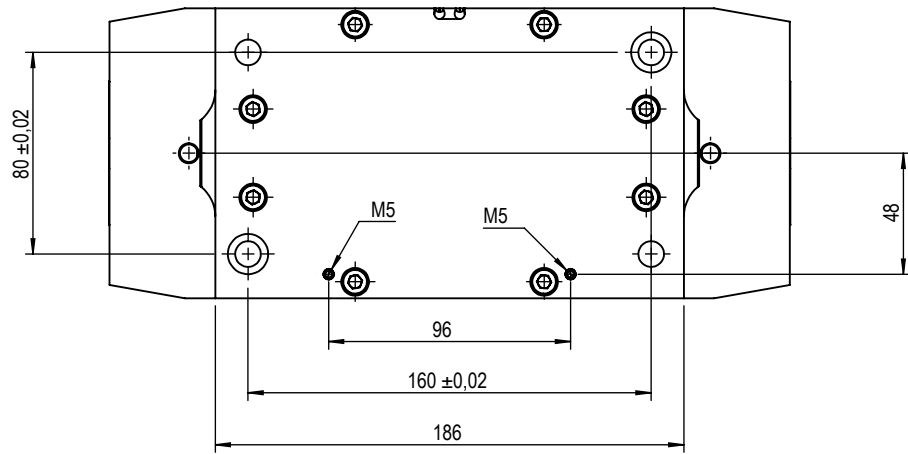


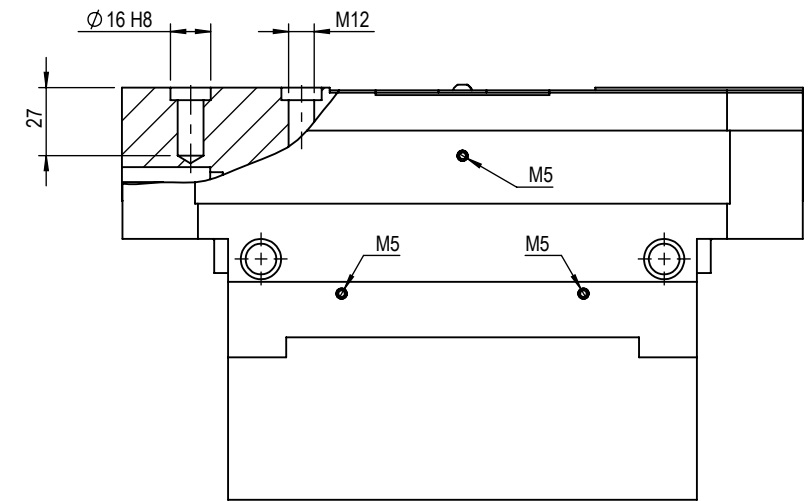

SECTION B-B

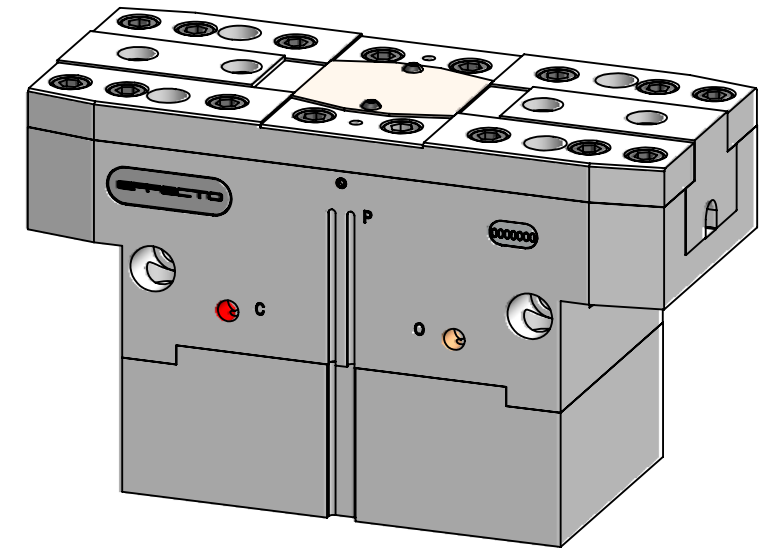

Stroke per Jaw: 17 mm
 Closing Force: 5150+5150 N
 Opening Force: 2700+2700 N
 Repeat accuracy: ± 0.02 mm
 Nominal Operating Pressure: 6 bar
 Max Operating Pressure: 8 bar
 Fluid consumption double stroke: 1400 cm³

 EFFECTO [®]		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR): Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 30/04/2025		Commercial Description:		
	PROD:M.Tozzini 30/04/2025		HPG-225-P-17-U-CM-8-P-B-S		
	QC out:-		Description:		
	Sales: - -		Gripper HPG 225 SCM		
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:		A3
	DATA: 08/05/2026		Weight: 13.27Kg		
			Sheet: 2 of 2	Rev:00	