

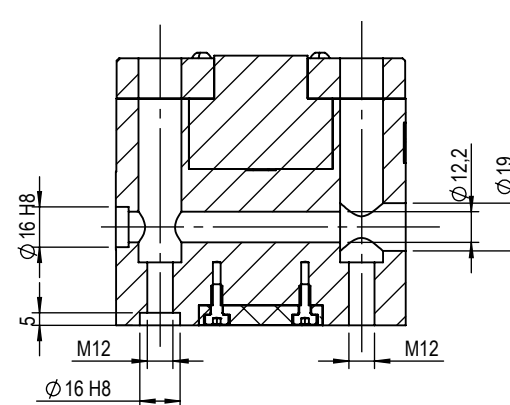
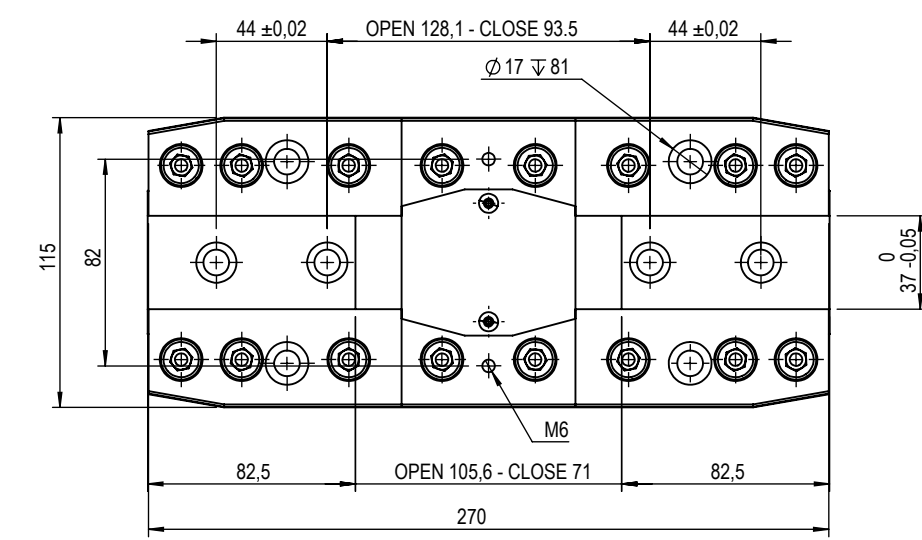
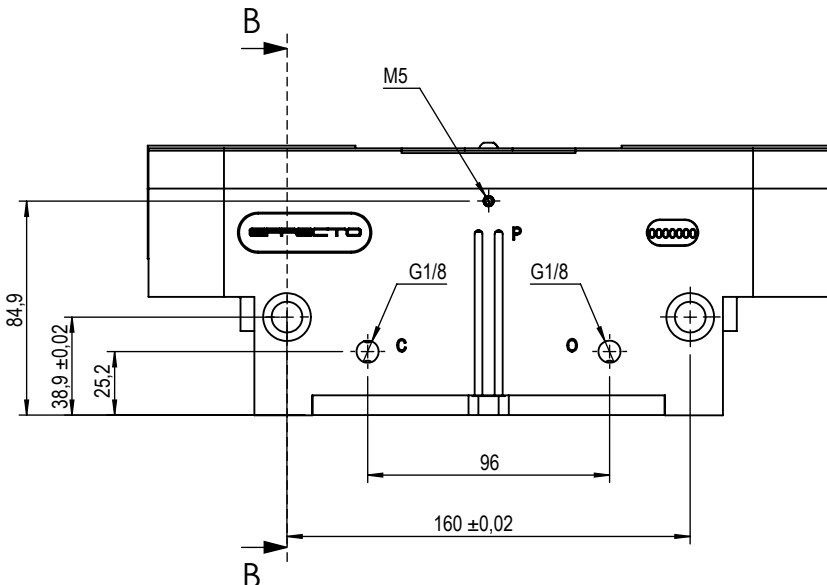
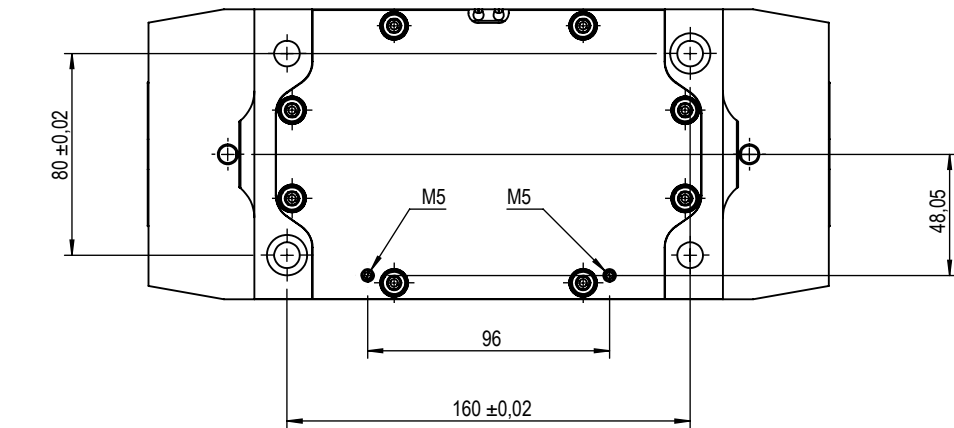


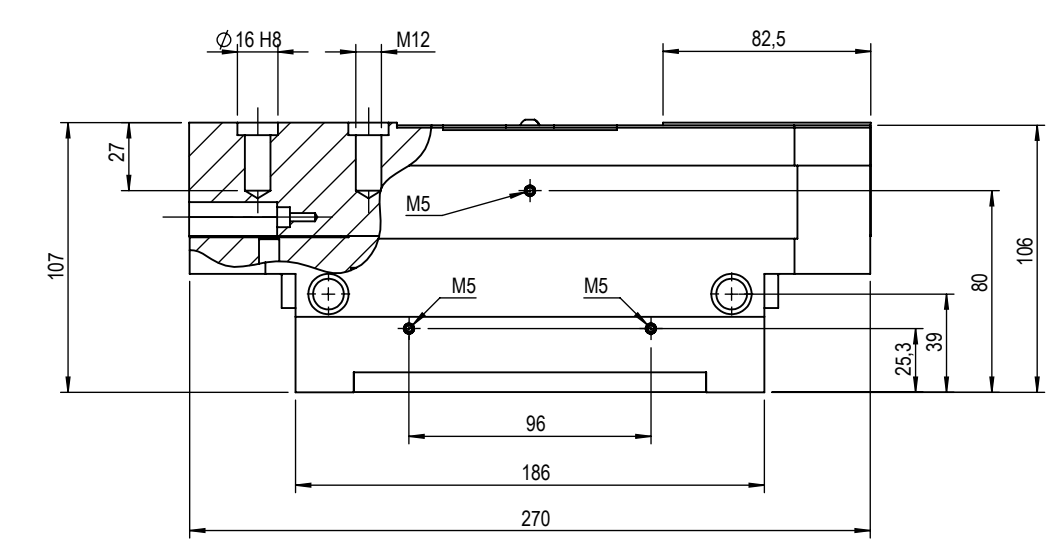

SEZIONE B-B

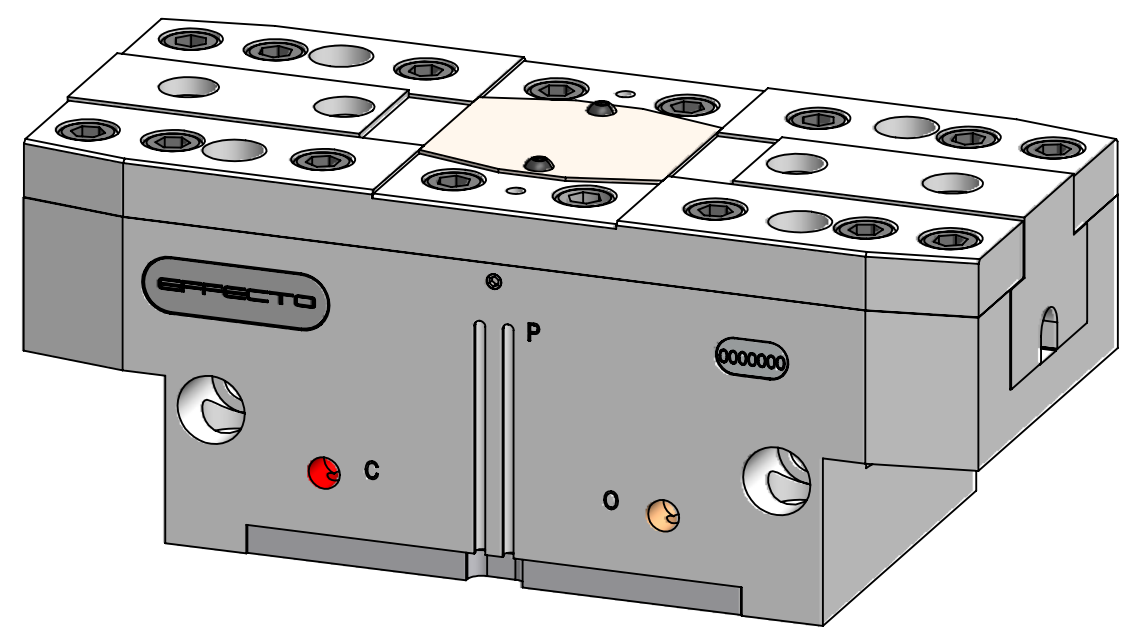

Stroke per Jaw: 17 mm  
Closing Force: 4450+4450 N  
Opening Force: 4600+4600 N  
Repeat accuracy:  $\pm 0.02$  mm  
Nominal Operating Pressure: 6 bar  
Max Operating Pressure: 8 bar  
Fluid consumption double stroke: 726 cm<sup>3</sup>

|                                                                                                                                                                                                                                                                                                                                    |  |                                                                                                    |                                                                                                                                                                                  |  |                                            |        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------|--------|
|  <b>EFFECTO</b><br>THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE. |  | Eng: 30/04/2025<br>PROD: M. Tozzini 30/04/2025<br>QC out: M. Tozzini 30/04/2025<br>Sales: - -      | Via Roma 141-143<br>28017 San Maurizio d'Opaglio (NO)<br>Tel. +39 032296142<br>Via Don Primo Mazzolari 4<br>26012 Castelleone (CR)<br>Tel. +39 037435138<br>www.effectogroup.com |  | <b>OUTLINE</b><br>DO NOT SCALE THE DRAWING |        |
|                                                                                                                                                                                                                                                                                                                                    |  | General Tolerances in accordance with ISO 2768-m H<br>CENTERING HOLE: ISO 6411<br>DATA: 27/04/2026 | Commercial Description:<br><b>HPG-225-P-17-U-SM-8-P-B-S</b><br>Description:<br><b>Gripper HPG 225 S</b><br>Part Number:<br><b>HP225SCB</b><br>Weight: 9.87Kg                     |  | Sheet: 2 of 2                              | Rev:00 |