

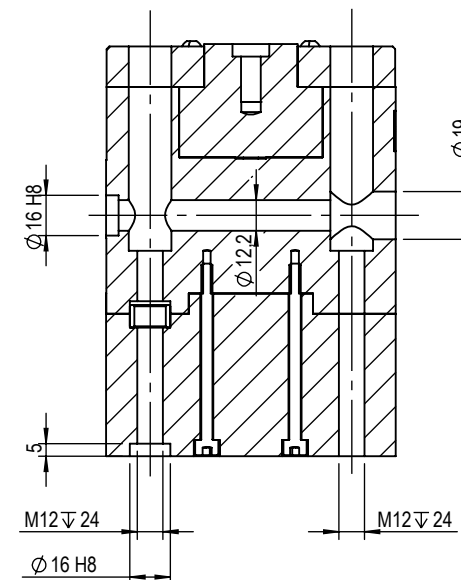
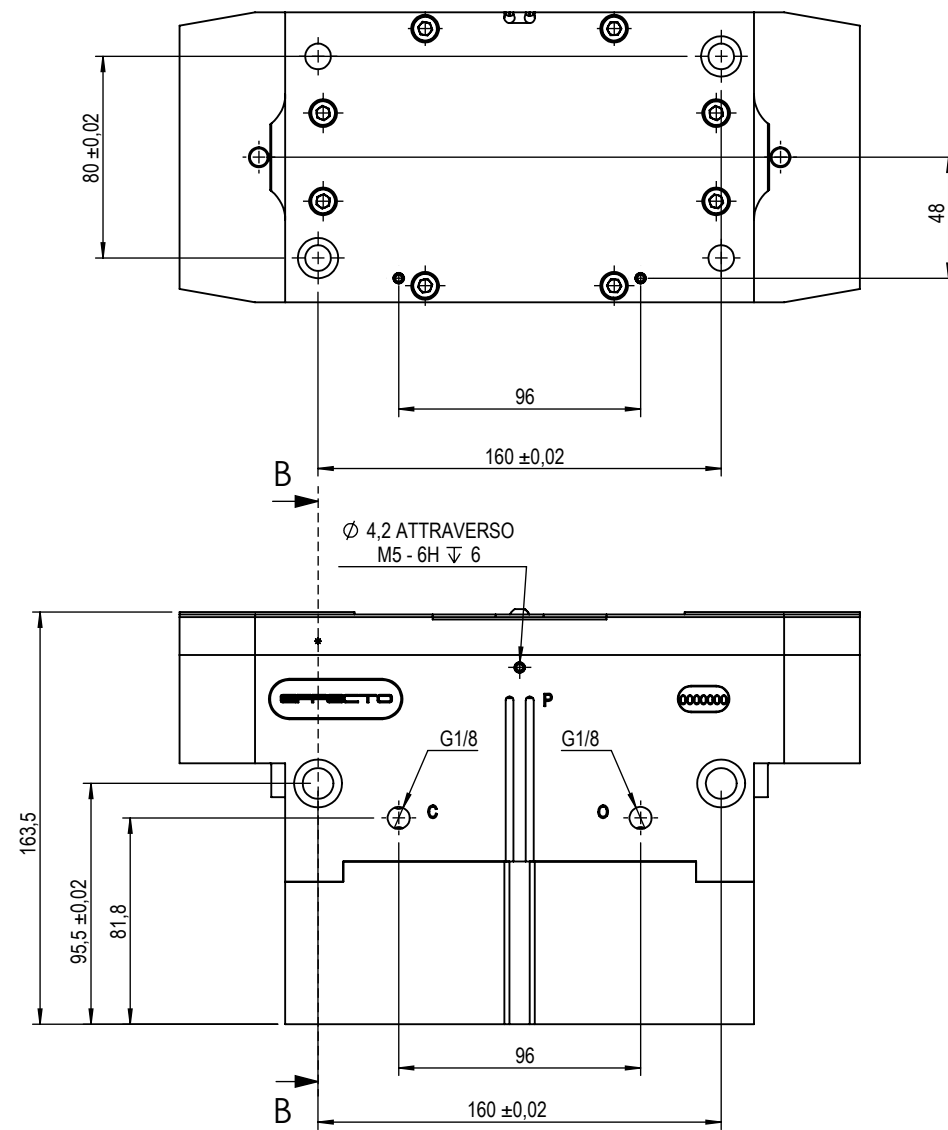


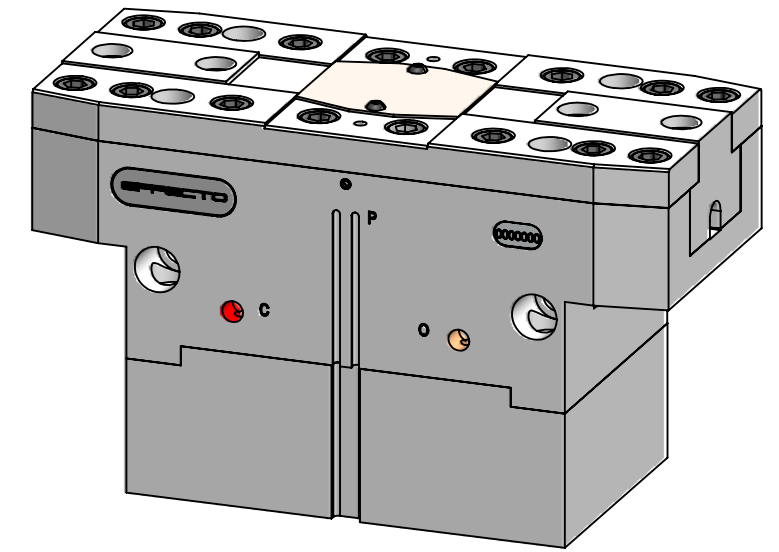

SEZIONE B-B

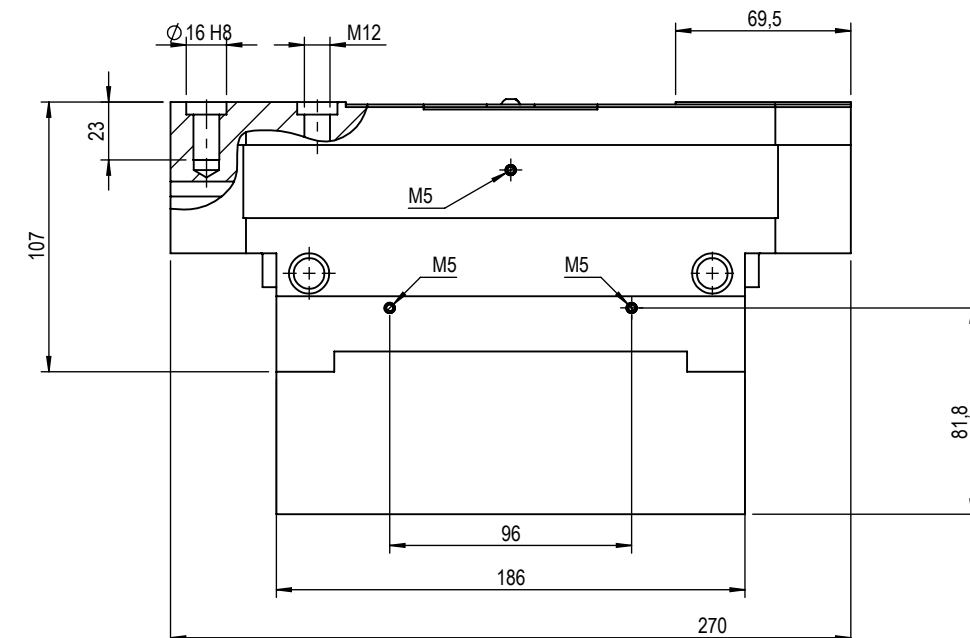

Stroke per Jaw: 30 mm

Closing Force: $1500 + 1500 \text{ N}$


Opening Force: $3050 + 3050 \text{ N}$

Repeat accuracy: ± 0.02 mm

Nominal Operating Pressure: 6 bar

Max Operating Pressure: 8 bar

Fluid consumption double stroke: 1400 cm³

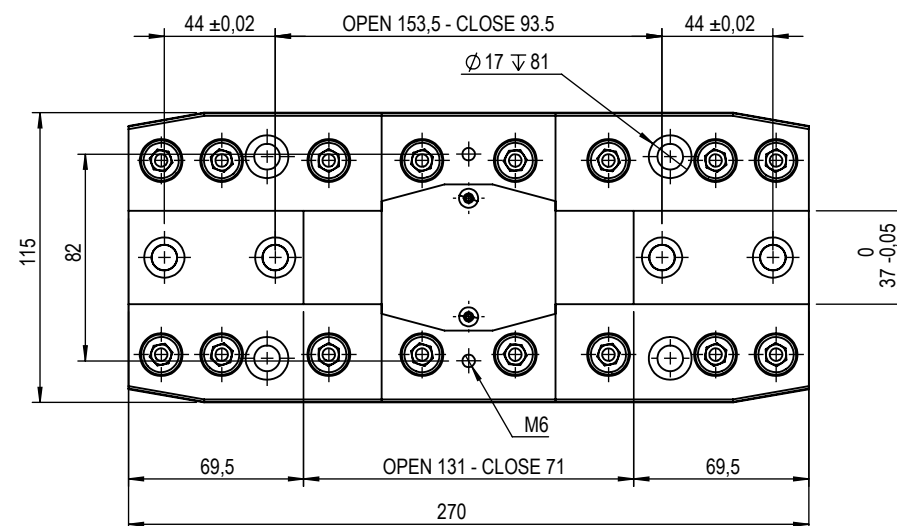

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR); Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
		THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 30/04/2025 PROD: M. Tozzini 30/04/2025 QC out: - Sales: -	
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Description: Gripper HPG 225 MA	
		DATA: 12/05/2026		Part Number: HP225NMA	
		Weight: 12.57Kg		Sheet: 2 of 2	Rev:00