

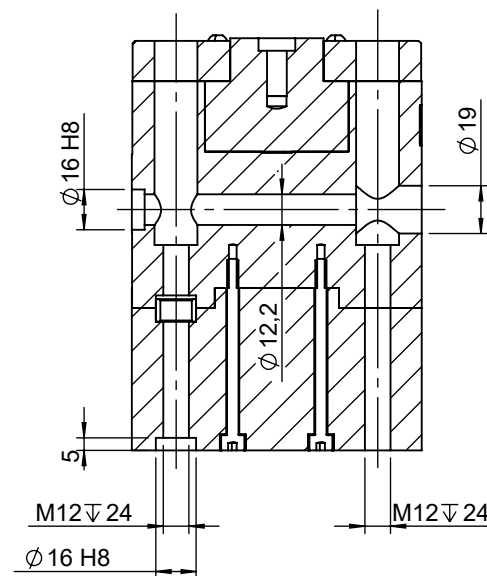
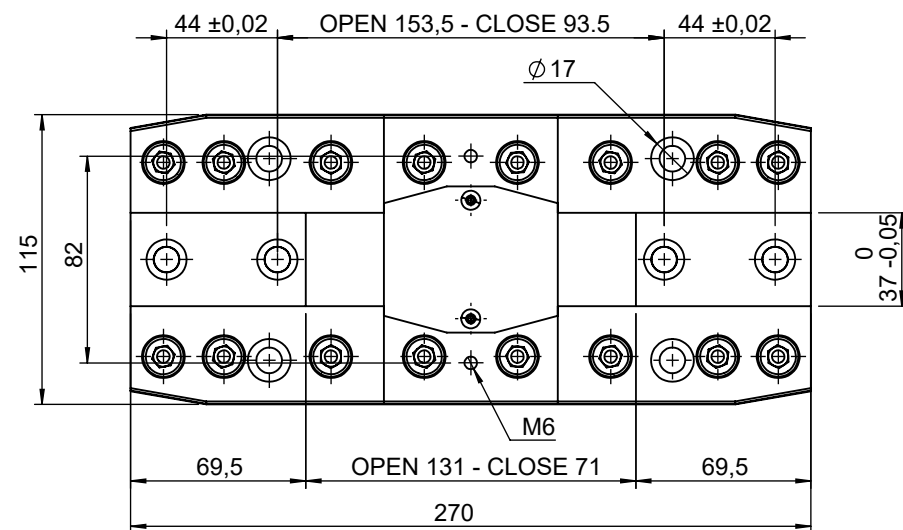
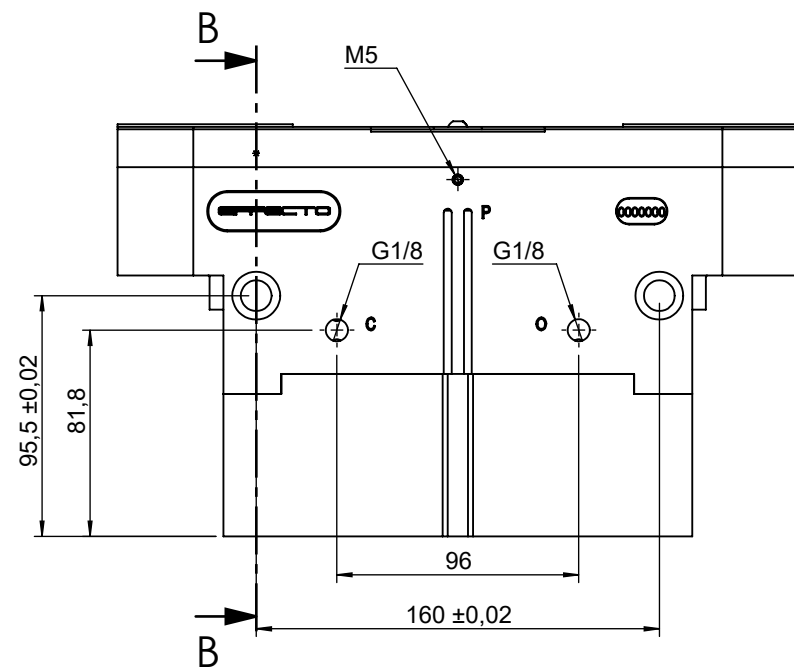
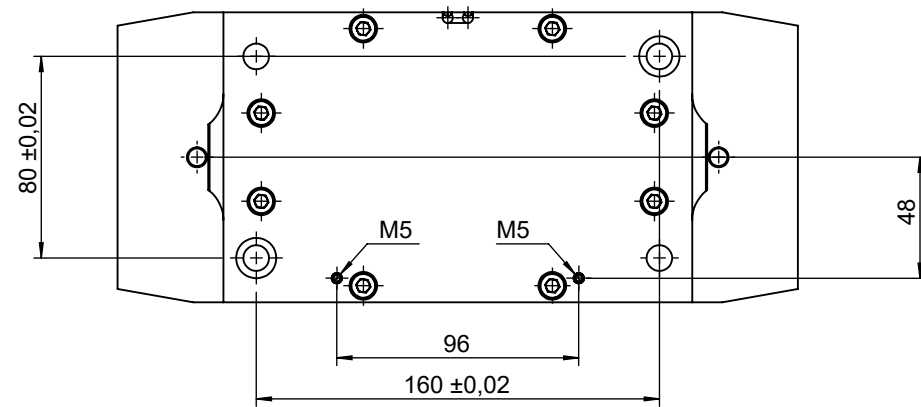


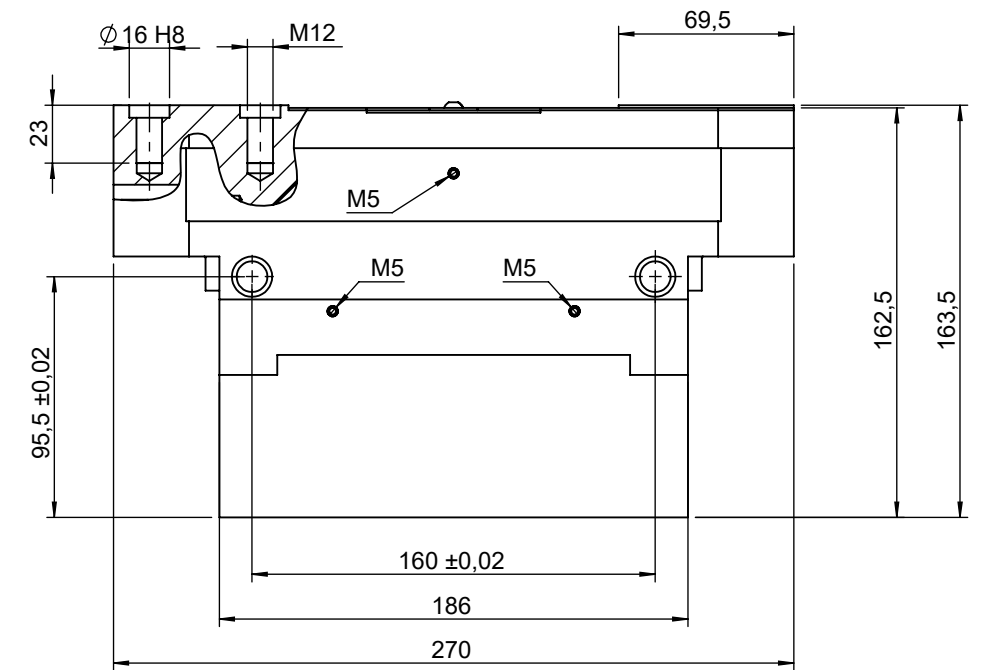

SECTION B-B

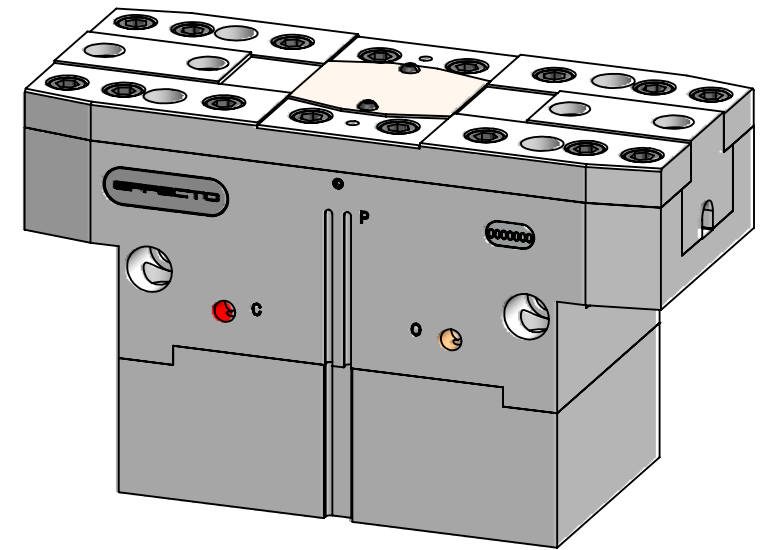

Stroke per Jaw: 30 mm

Closing Force: 2980+2980 N


Opening Force: 1550+1550 N

Repeat accuracy: $\pm 0,02$ mm

Nominal Operating Pressure: 6 bar

Max Operating Pressure: 8 bar

Fluid consumption double stroke: 1400 cm³

 EFFECTO [®]		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR): Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 30/04/2025		Commercial Description: HPG-225-P-30-U-CM-8-P-B-S Description: Gripper HPG 225 CM	
		PROD:M.Tozzini 30/04/2025			
		QC out: -			
		Sales: - -			
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number: HP225NCM	
		DATA: 12/05/2026		Weight: 12.91Kg	
				Sheet: 2 of 2	
				Rev:00	

A3