

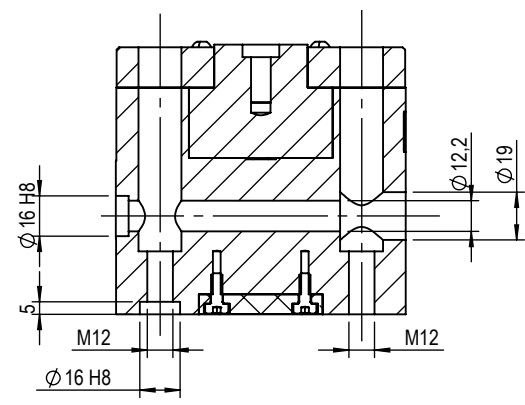
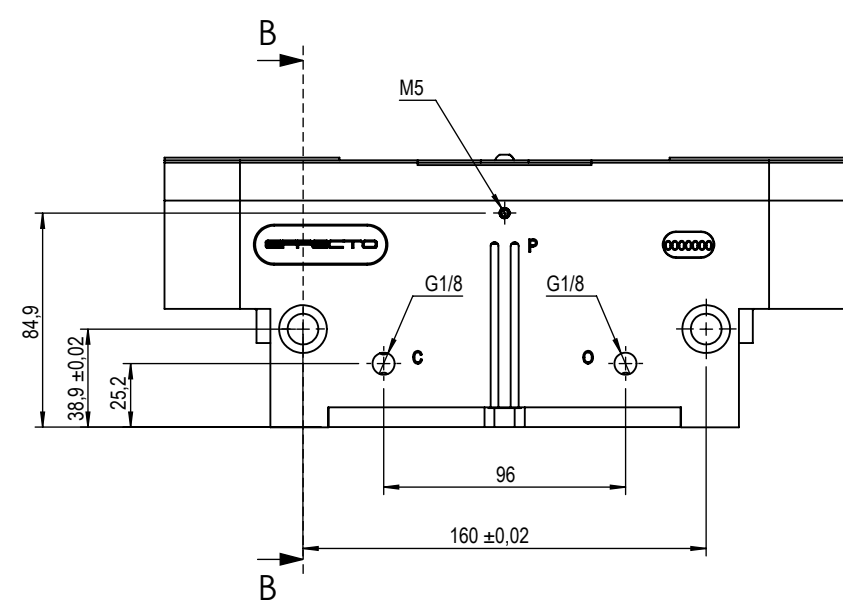
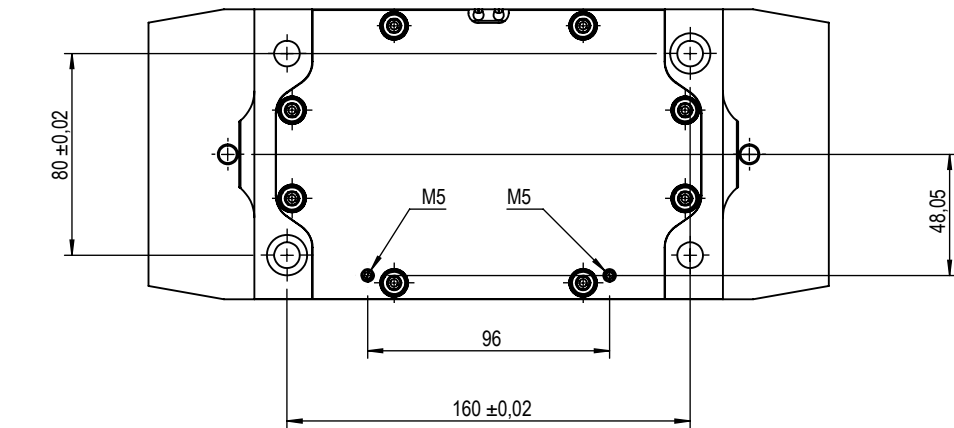
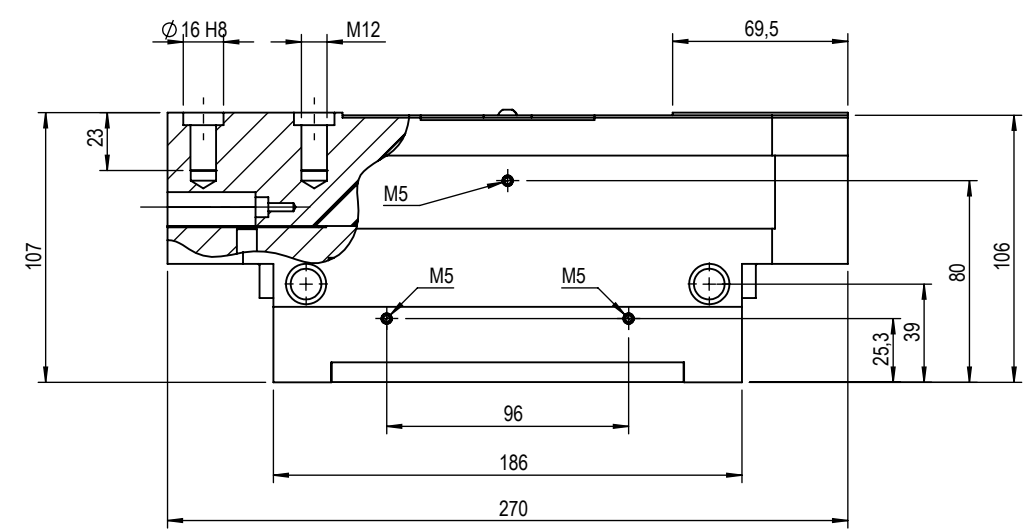


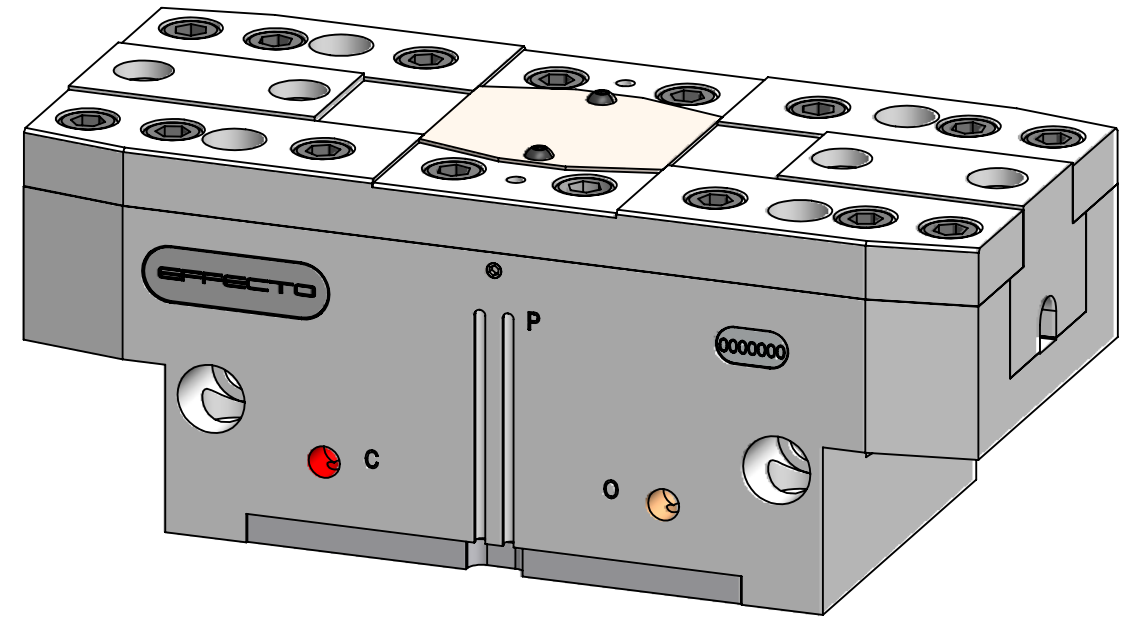

SEZIONE B-B

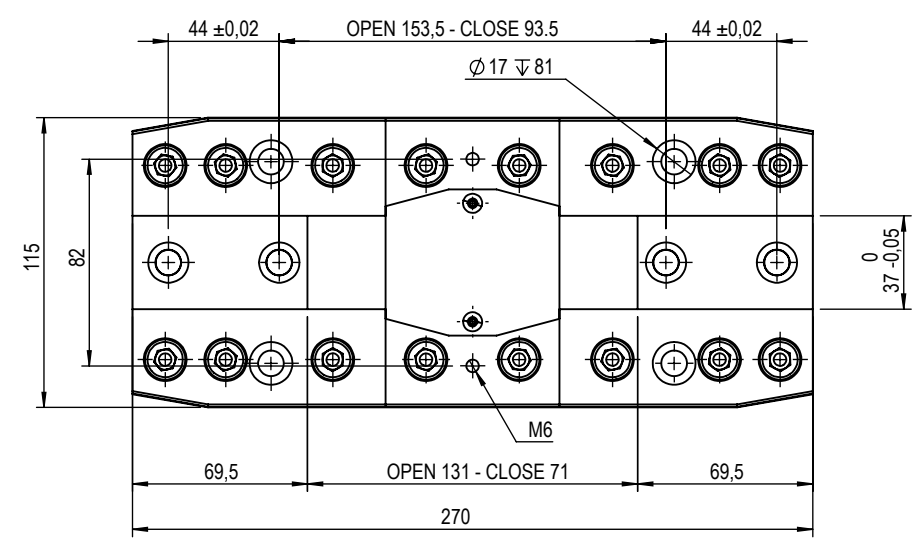

Stroke per Jaw: 30 mm
Closing Force: 2600+2600 N
Opening Force: 2650+2650 N
Repeat accuracy: ± 0.02 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 726 cm³

 EFFECTO THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 30/04/2025	OUTLINE DO NOT SCALE THE DRAWING	
		PROD: M. Tozzini 30/04/2025		
FIRST ANGLE PROJECTION 		QC out: -	Commercial Description: HPG-225-P-30-U-SM-8-P-B-S	
		Sales: -	Description: Gripper HPG 225	
General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		DATA: 27/04/2026	Part Number: HP225NCL	A3
			Weight: 9.53Kg	Sheet: 2 of 2 Rev:00