

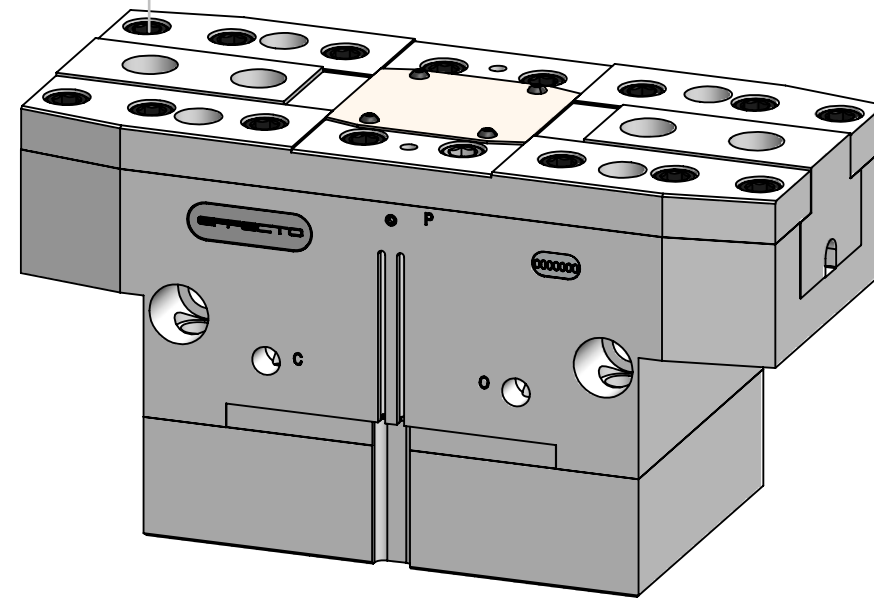
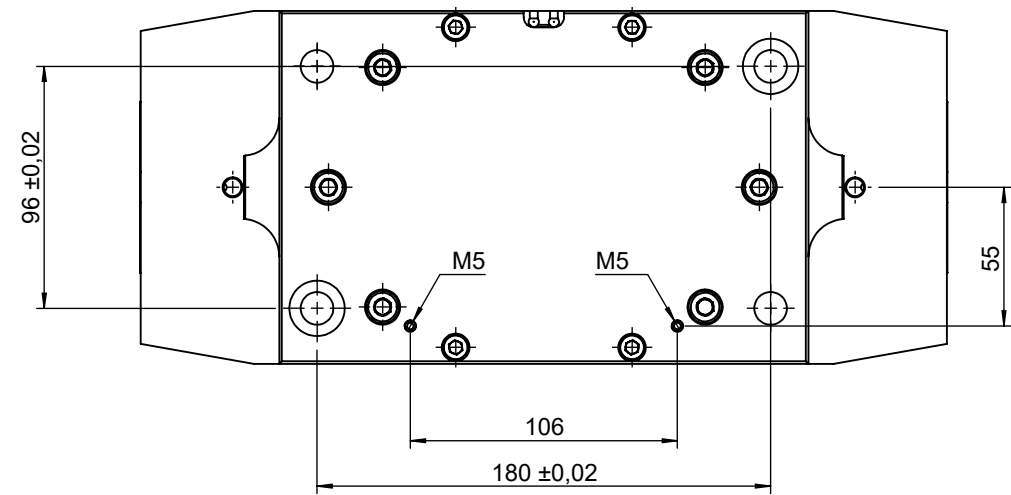
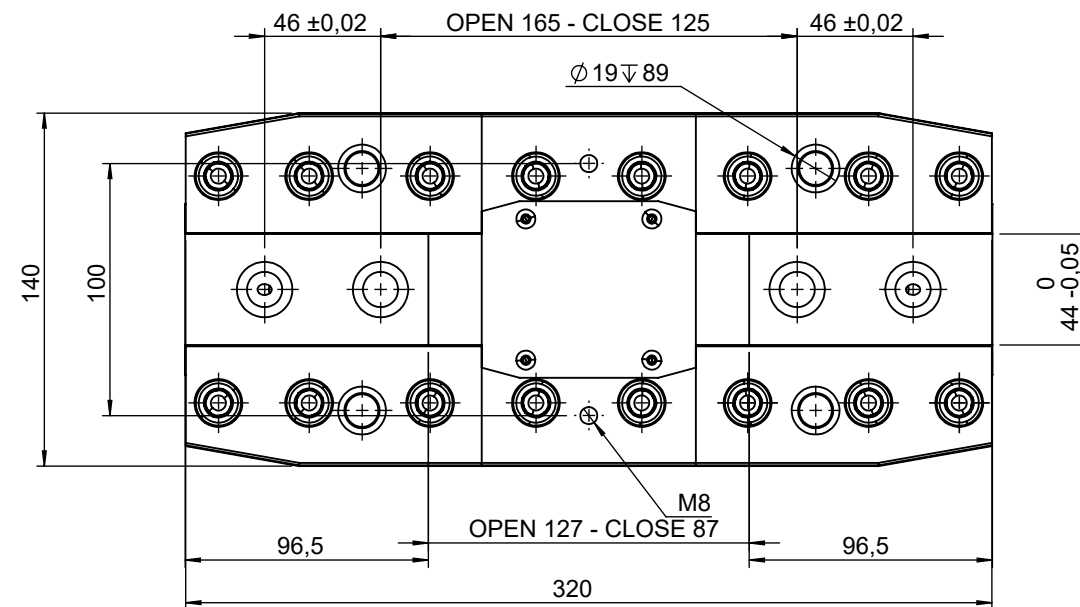
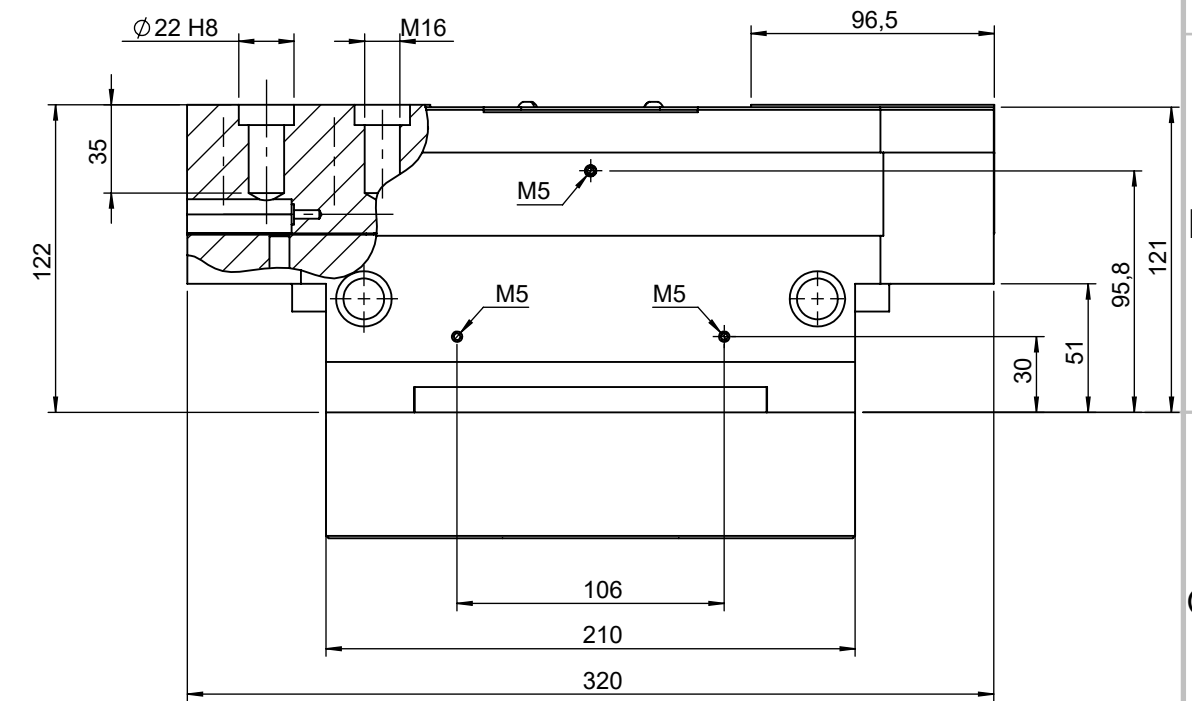
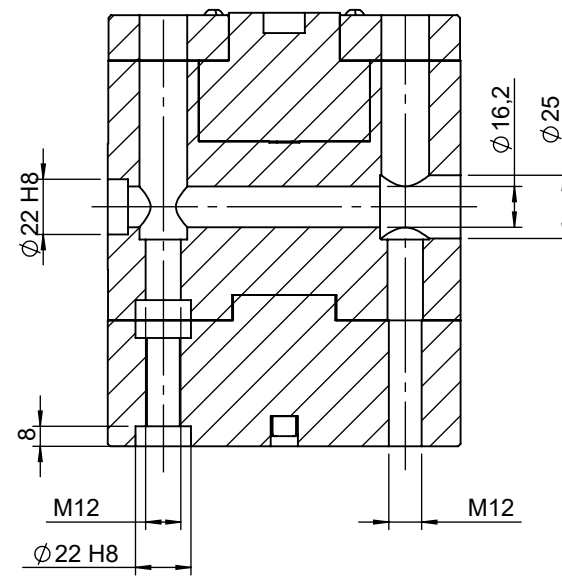


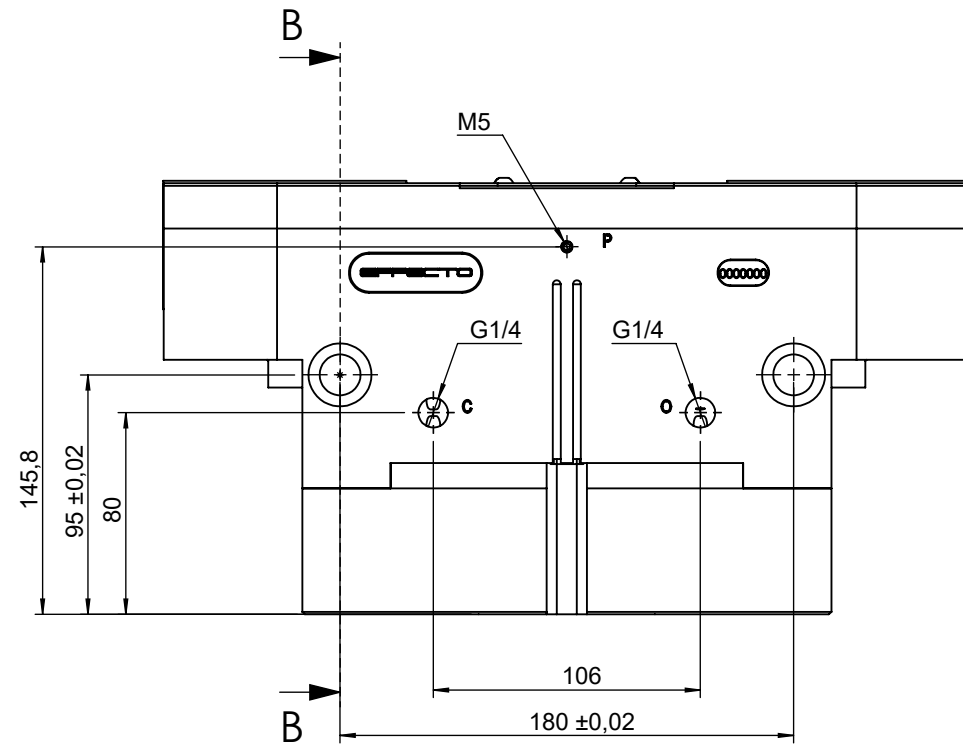

Stroke per Jaw: 20 mm
Closing Force: 3380+3380 N
Opening Force: 7320+7320 N
Repeat accuracy: ± 0.03 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 1640 cm³



 EFFECTO [®]		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 27/04/2026		Commercial Description:		
	PROD: M. Tozzini 28/04/2026		HPG-230-P-20-U-AM-8-P-B-S		
	QC out: -		Description:		
FIRST ANGLE PROJECTION 	Sales: -		Gripper HPG 230 SMA		
	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:		A3
	DATA: 08/05/2026		HP230SMA		
		Weight: 20.12Kg		Sheet: 2 of 2	Rev:00