


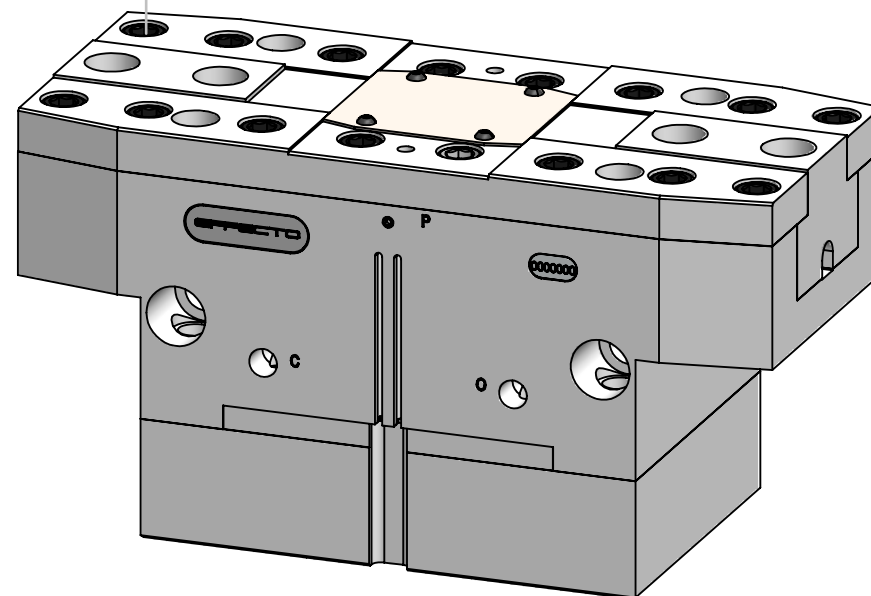
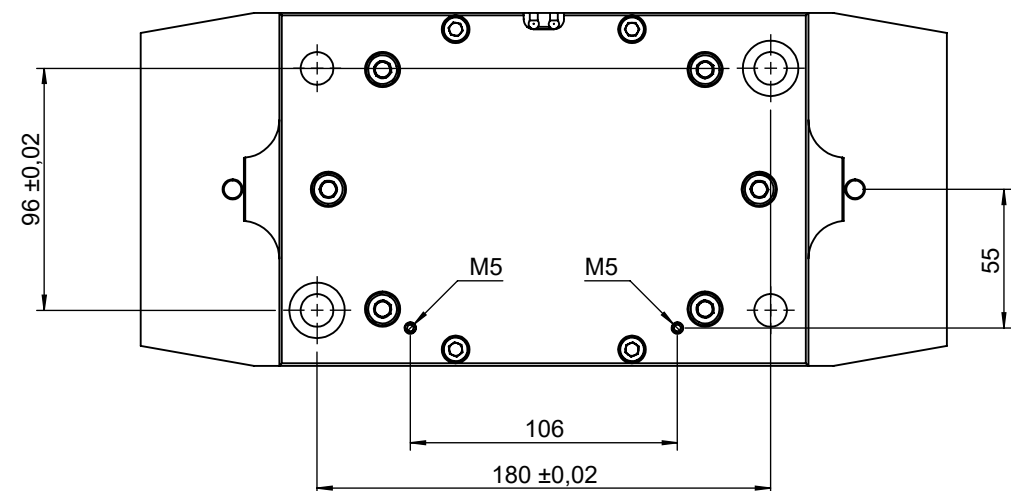
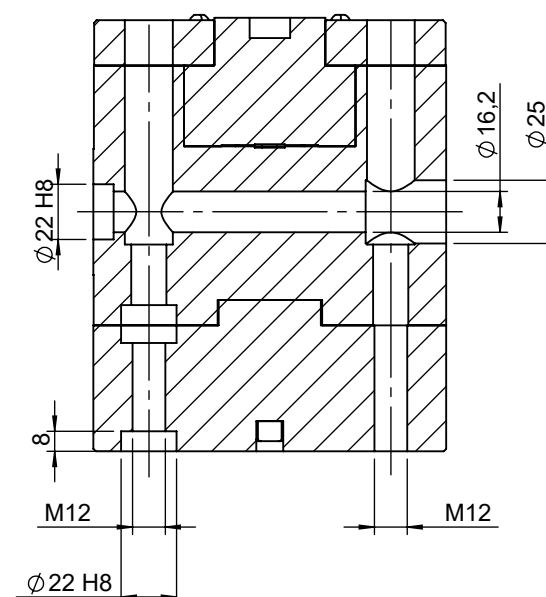


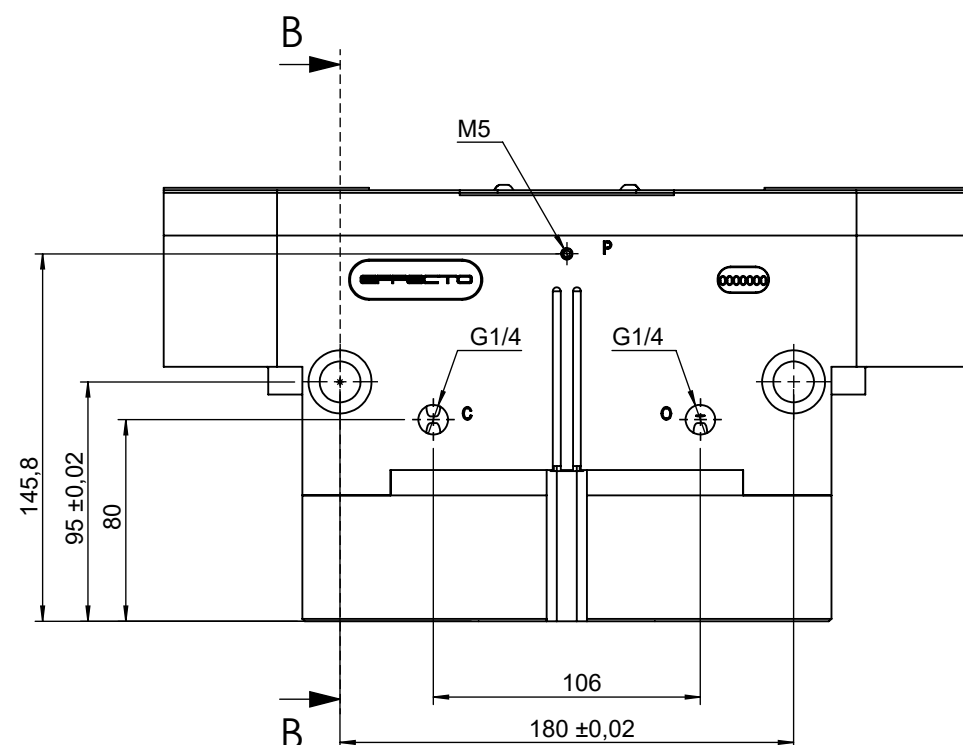

Stroke per Jaw: 35 mm
Closing Force: 4220+4220 N
Opening Force: 1950+1950 N
Repeat accuracy: ± 0.03 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 1640 cm3

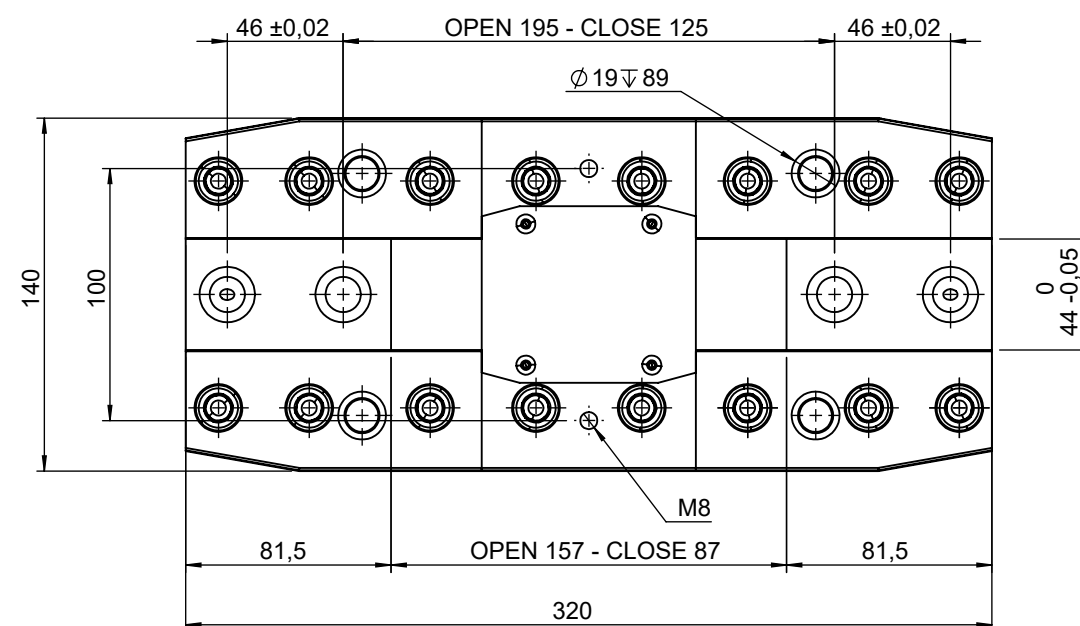

SECTION B-B

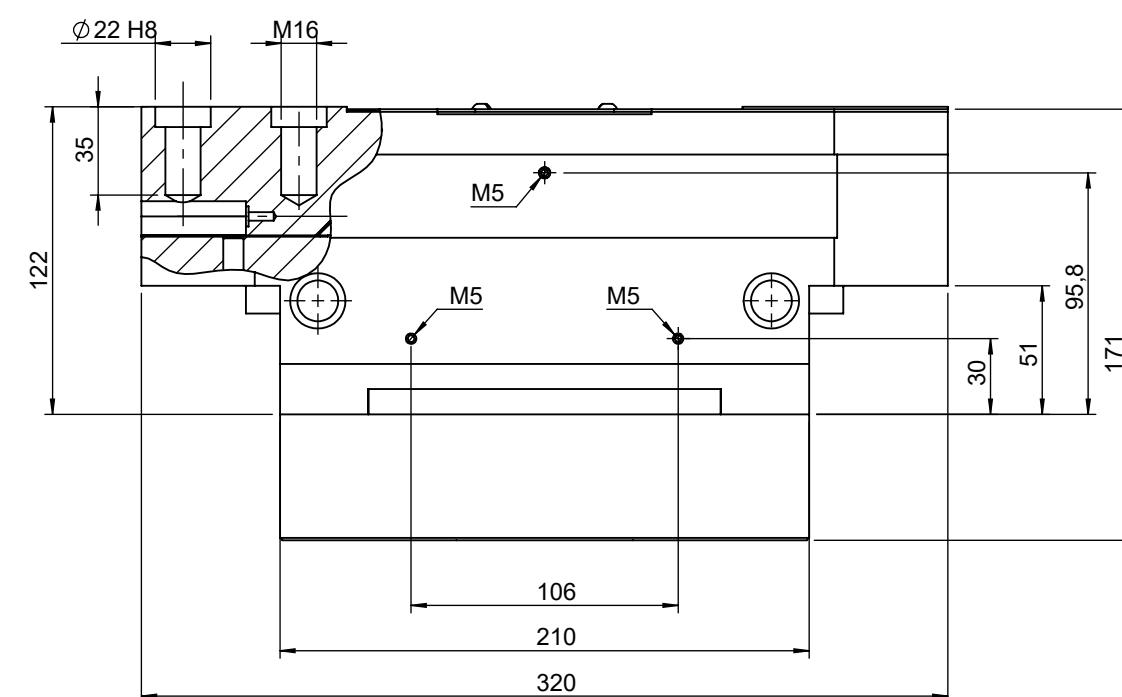

 EFFECTO THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 27/04/2026	OUTLINE DO NOT SCALE THE DRAWING	
		PROD: M. Tozzini 28/04/2026		
FIRST ANGLE PROJECTION 		QC out: -	Commercial Description: HPG-230-P-35-U-CM-8-P-B-S	
General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Sales: -	Description: Gripper HPG 230 CM	
DATA: 08/05/2026			Part Number: HP230NCM	A3
			Weight: 19.62Kg	Sheet: 2 of 2 Rev:00