


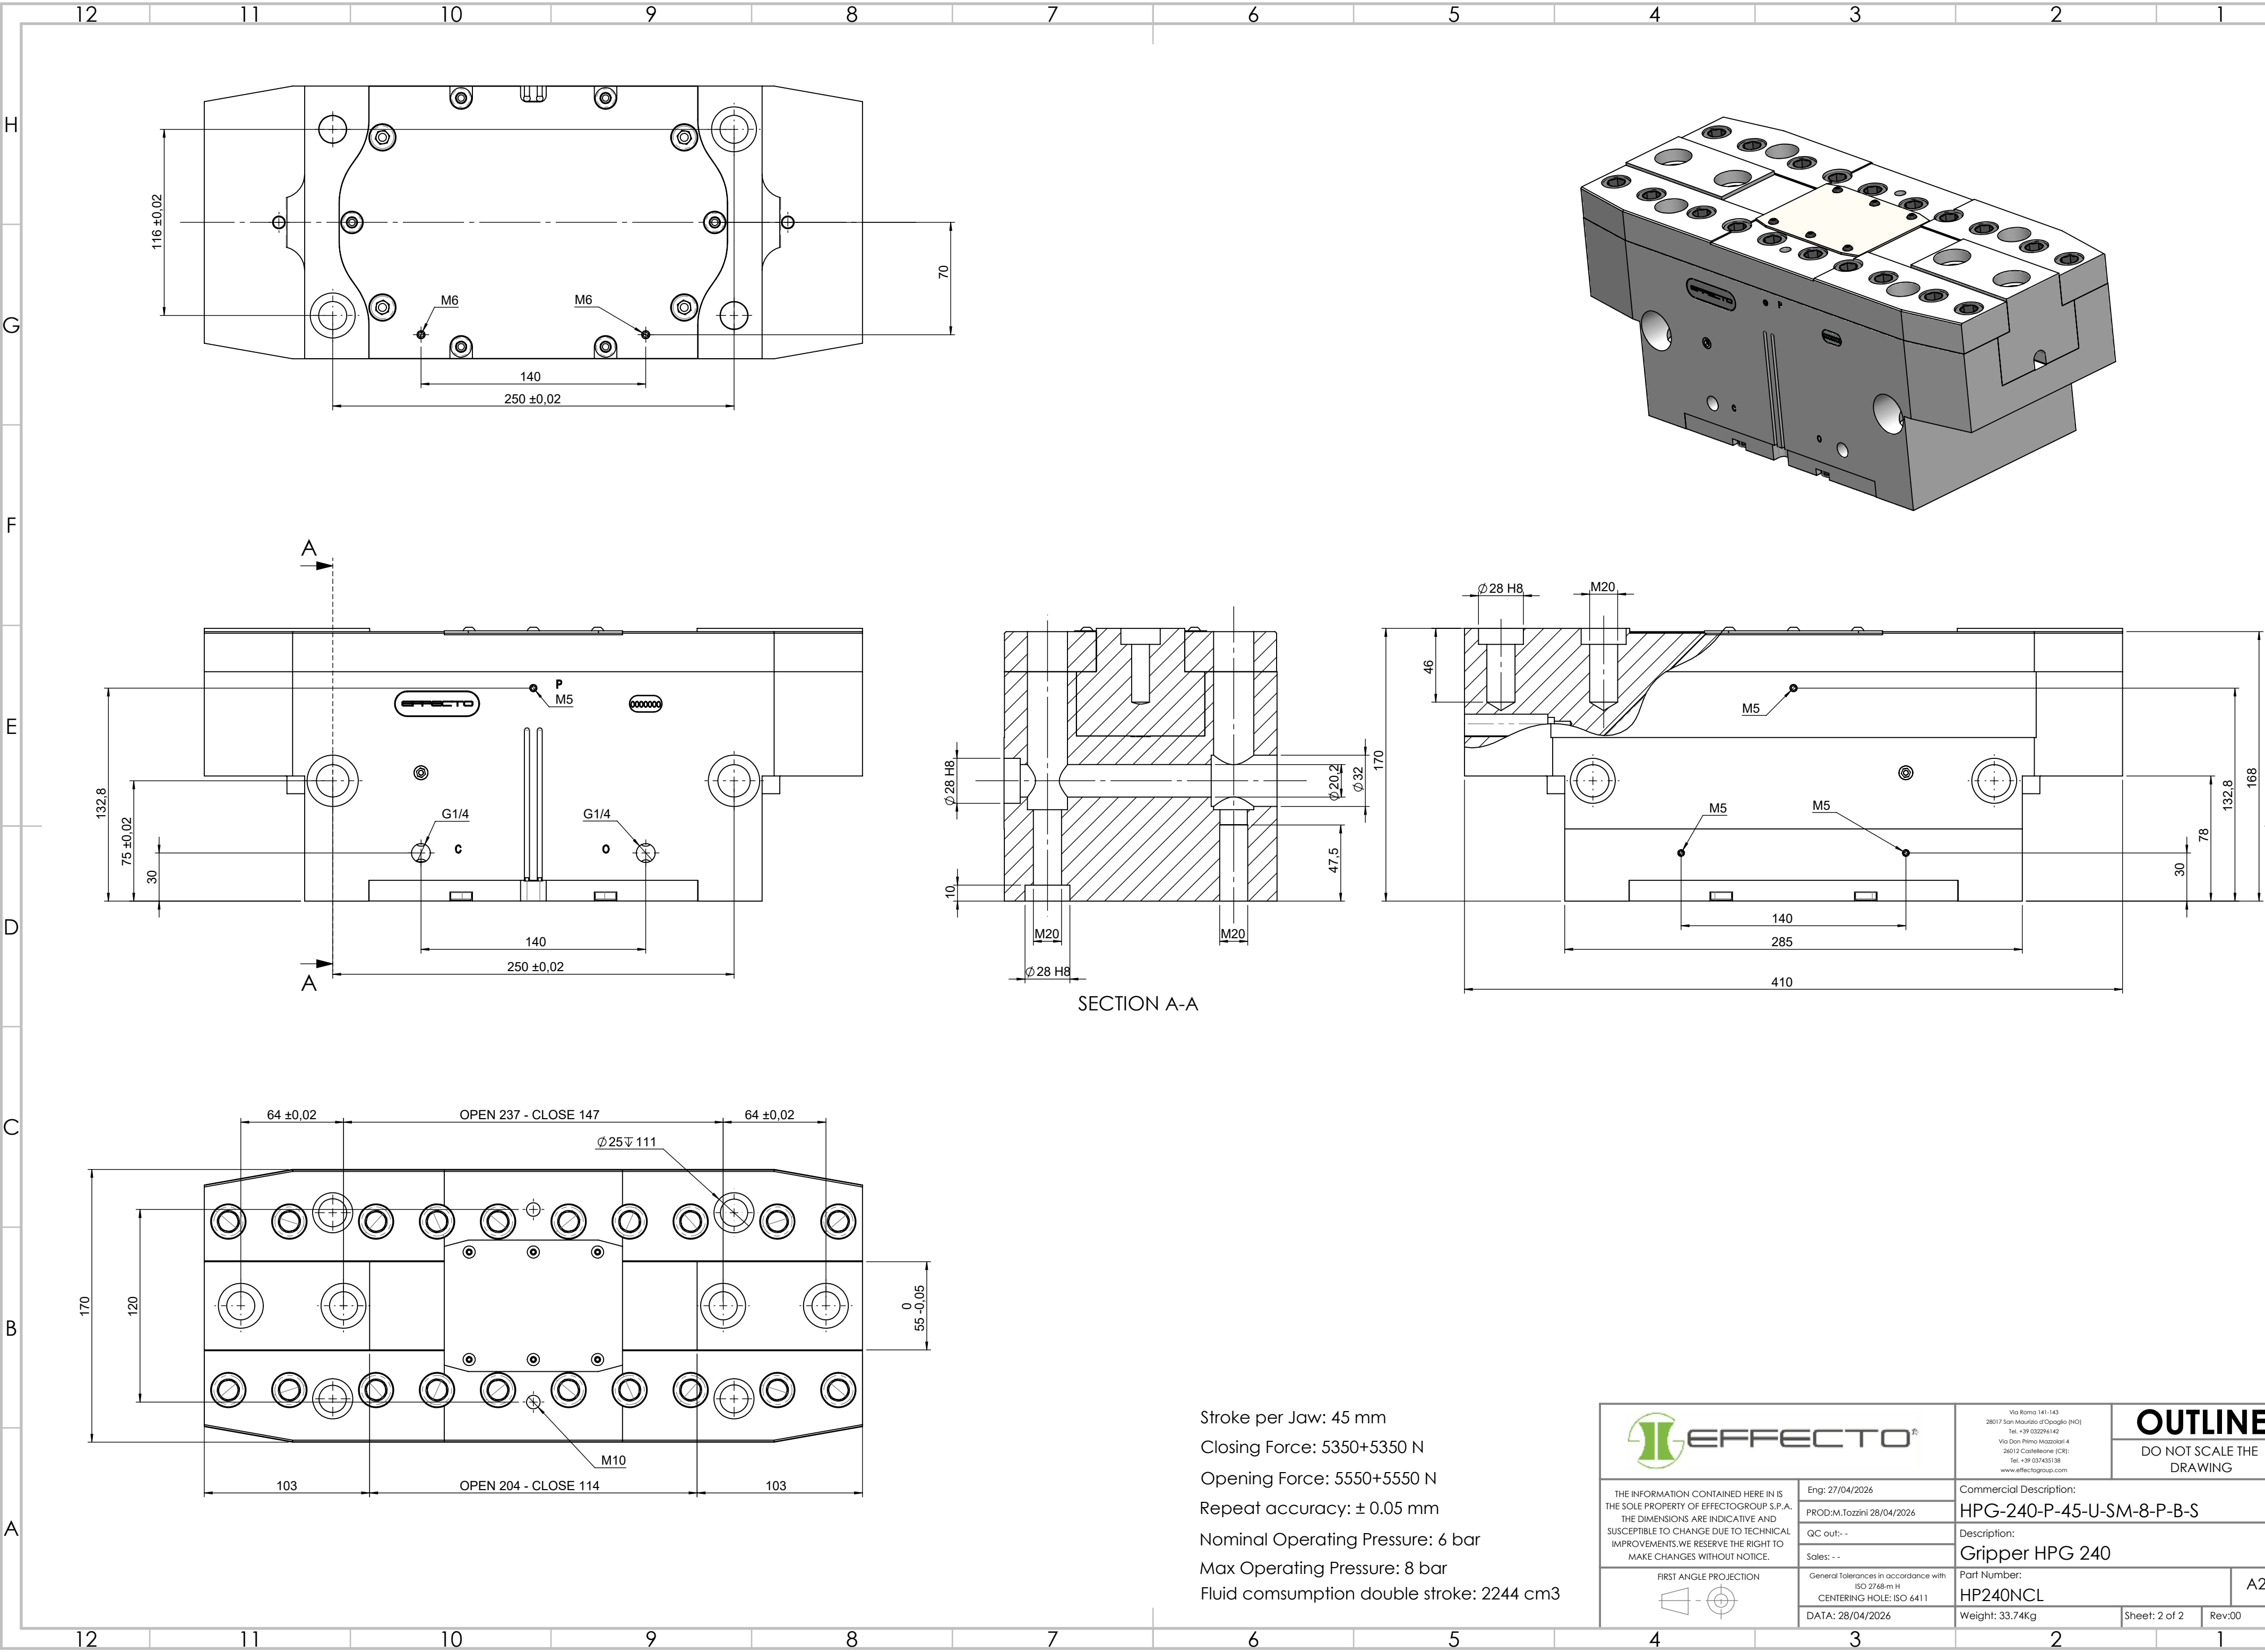

Stroke per Jaw: 45 mm
Closing Force: 5350+5350 N
Opening Force: 5550+5550 N
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 2244 cm3

 EFFECTO®		Via Roma 141-143 26017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26013 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 27/04/2026		Commercial Description: HPG-240-P-45-U-SM-8-P-B-S Description: Gripper HPG 240	
		PROD: M. Tozzini 28/04/2026			
		QC out: -			
		Sales: -			
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 28/04/2026		Part Number: HP240NCL	
				A2	
		Weight: 33.74Kg		Sheet: 2 of 2	Rev:00

A2