


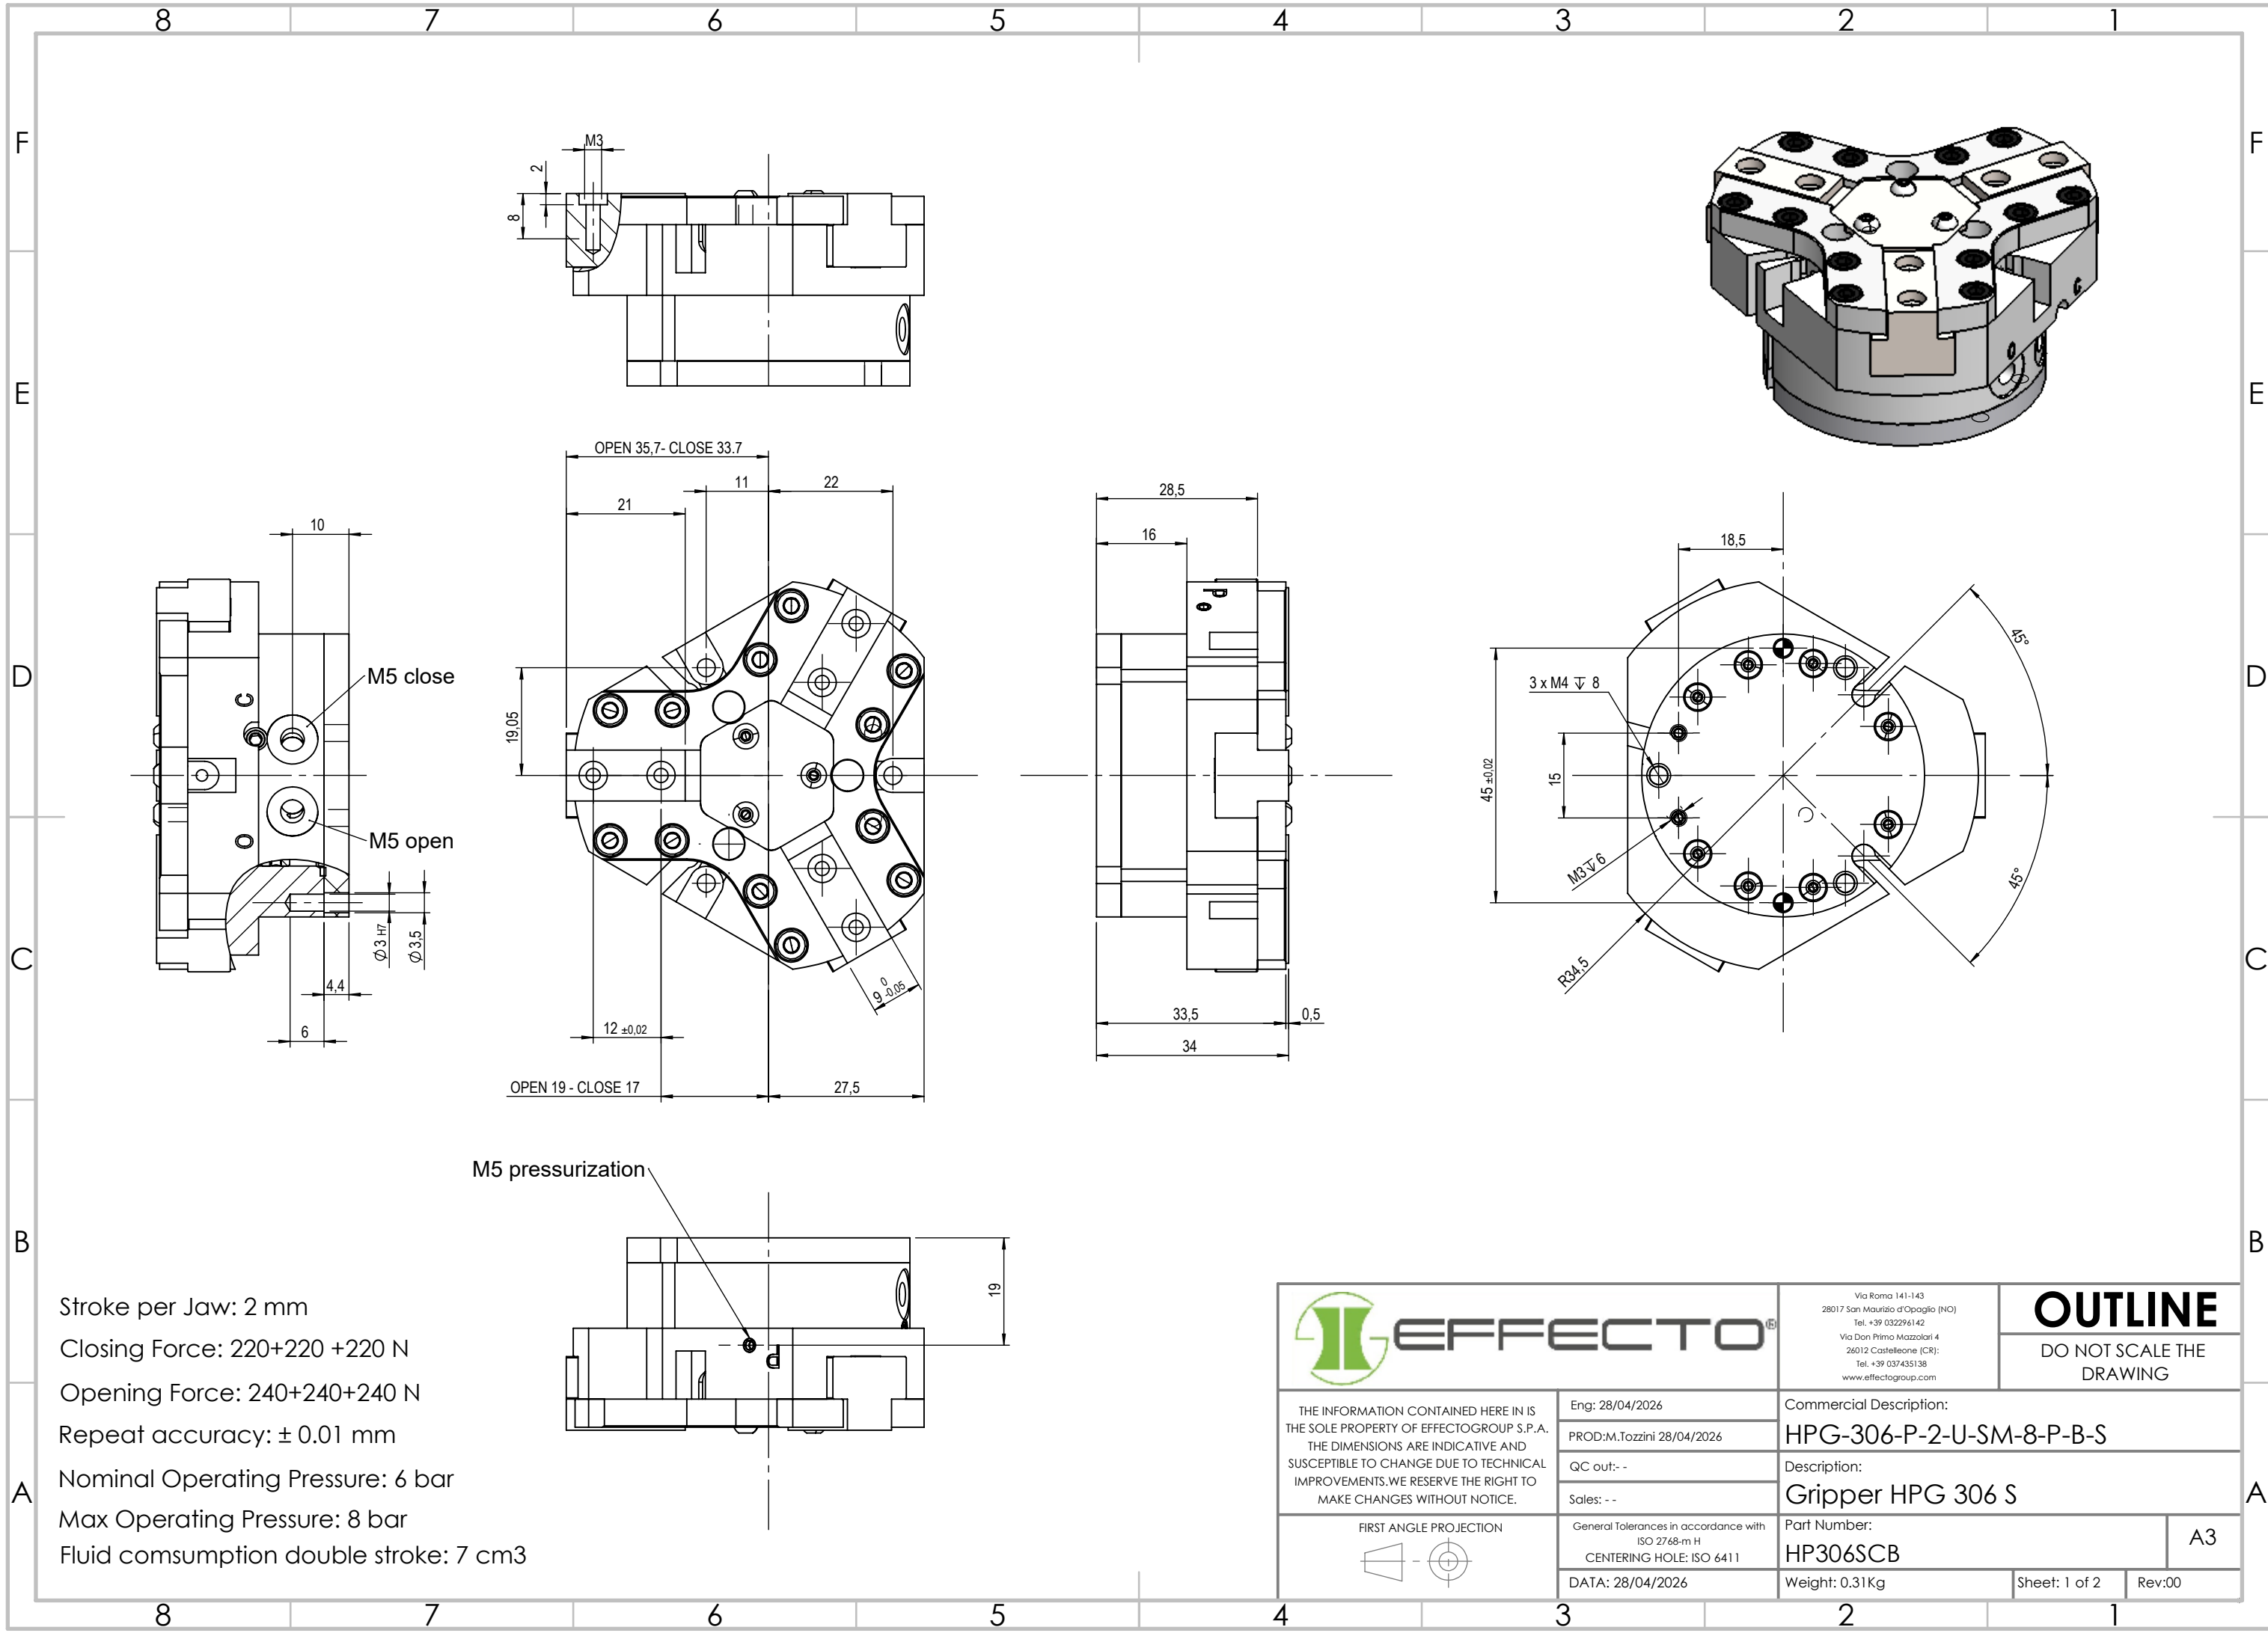

Stroke per Jaw: 2 mm
Closing Force: 220+220 +220 N
Opening Force: 240+240+240 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 7 cm³

M5 pressurization

 EFFECTO		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 28/04/2026 PROD: M. Tozzini 28/04/2026 QC out: - Sales: -		Commercial Description: HPG-306-P-2-U-SM-8-P-B-S	
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 28/04/2026		Description: Gripper HPG 306 S	
		Part Number: HP306SCB		A3	
		Weight: 0.31 Kg		Sheet: 1 of 2 Rev:00	