


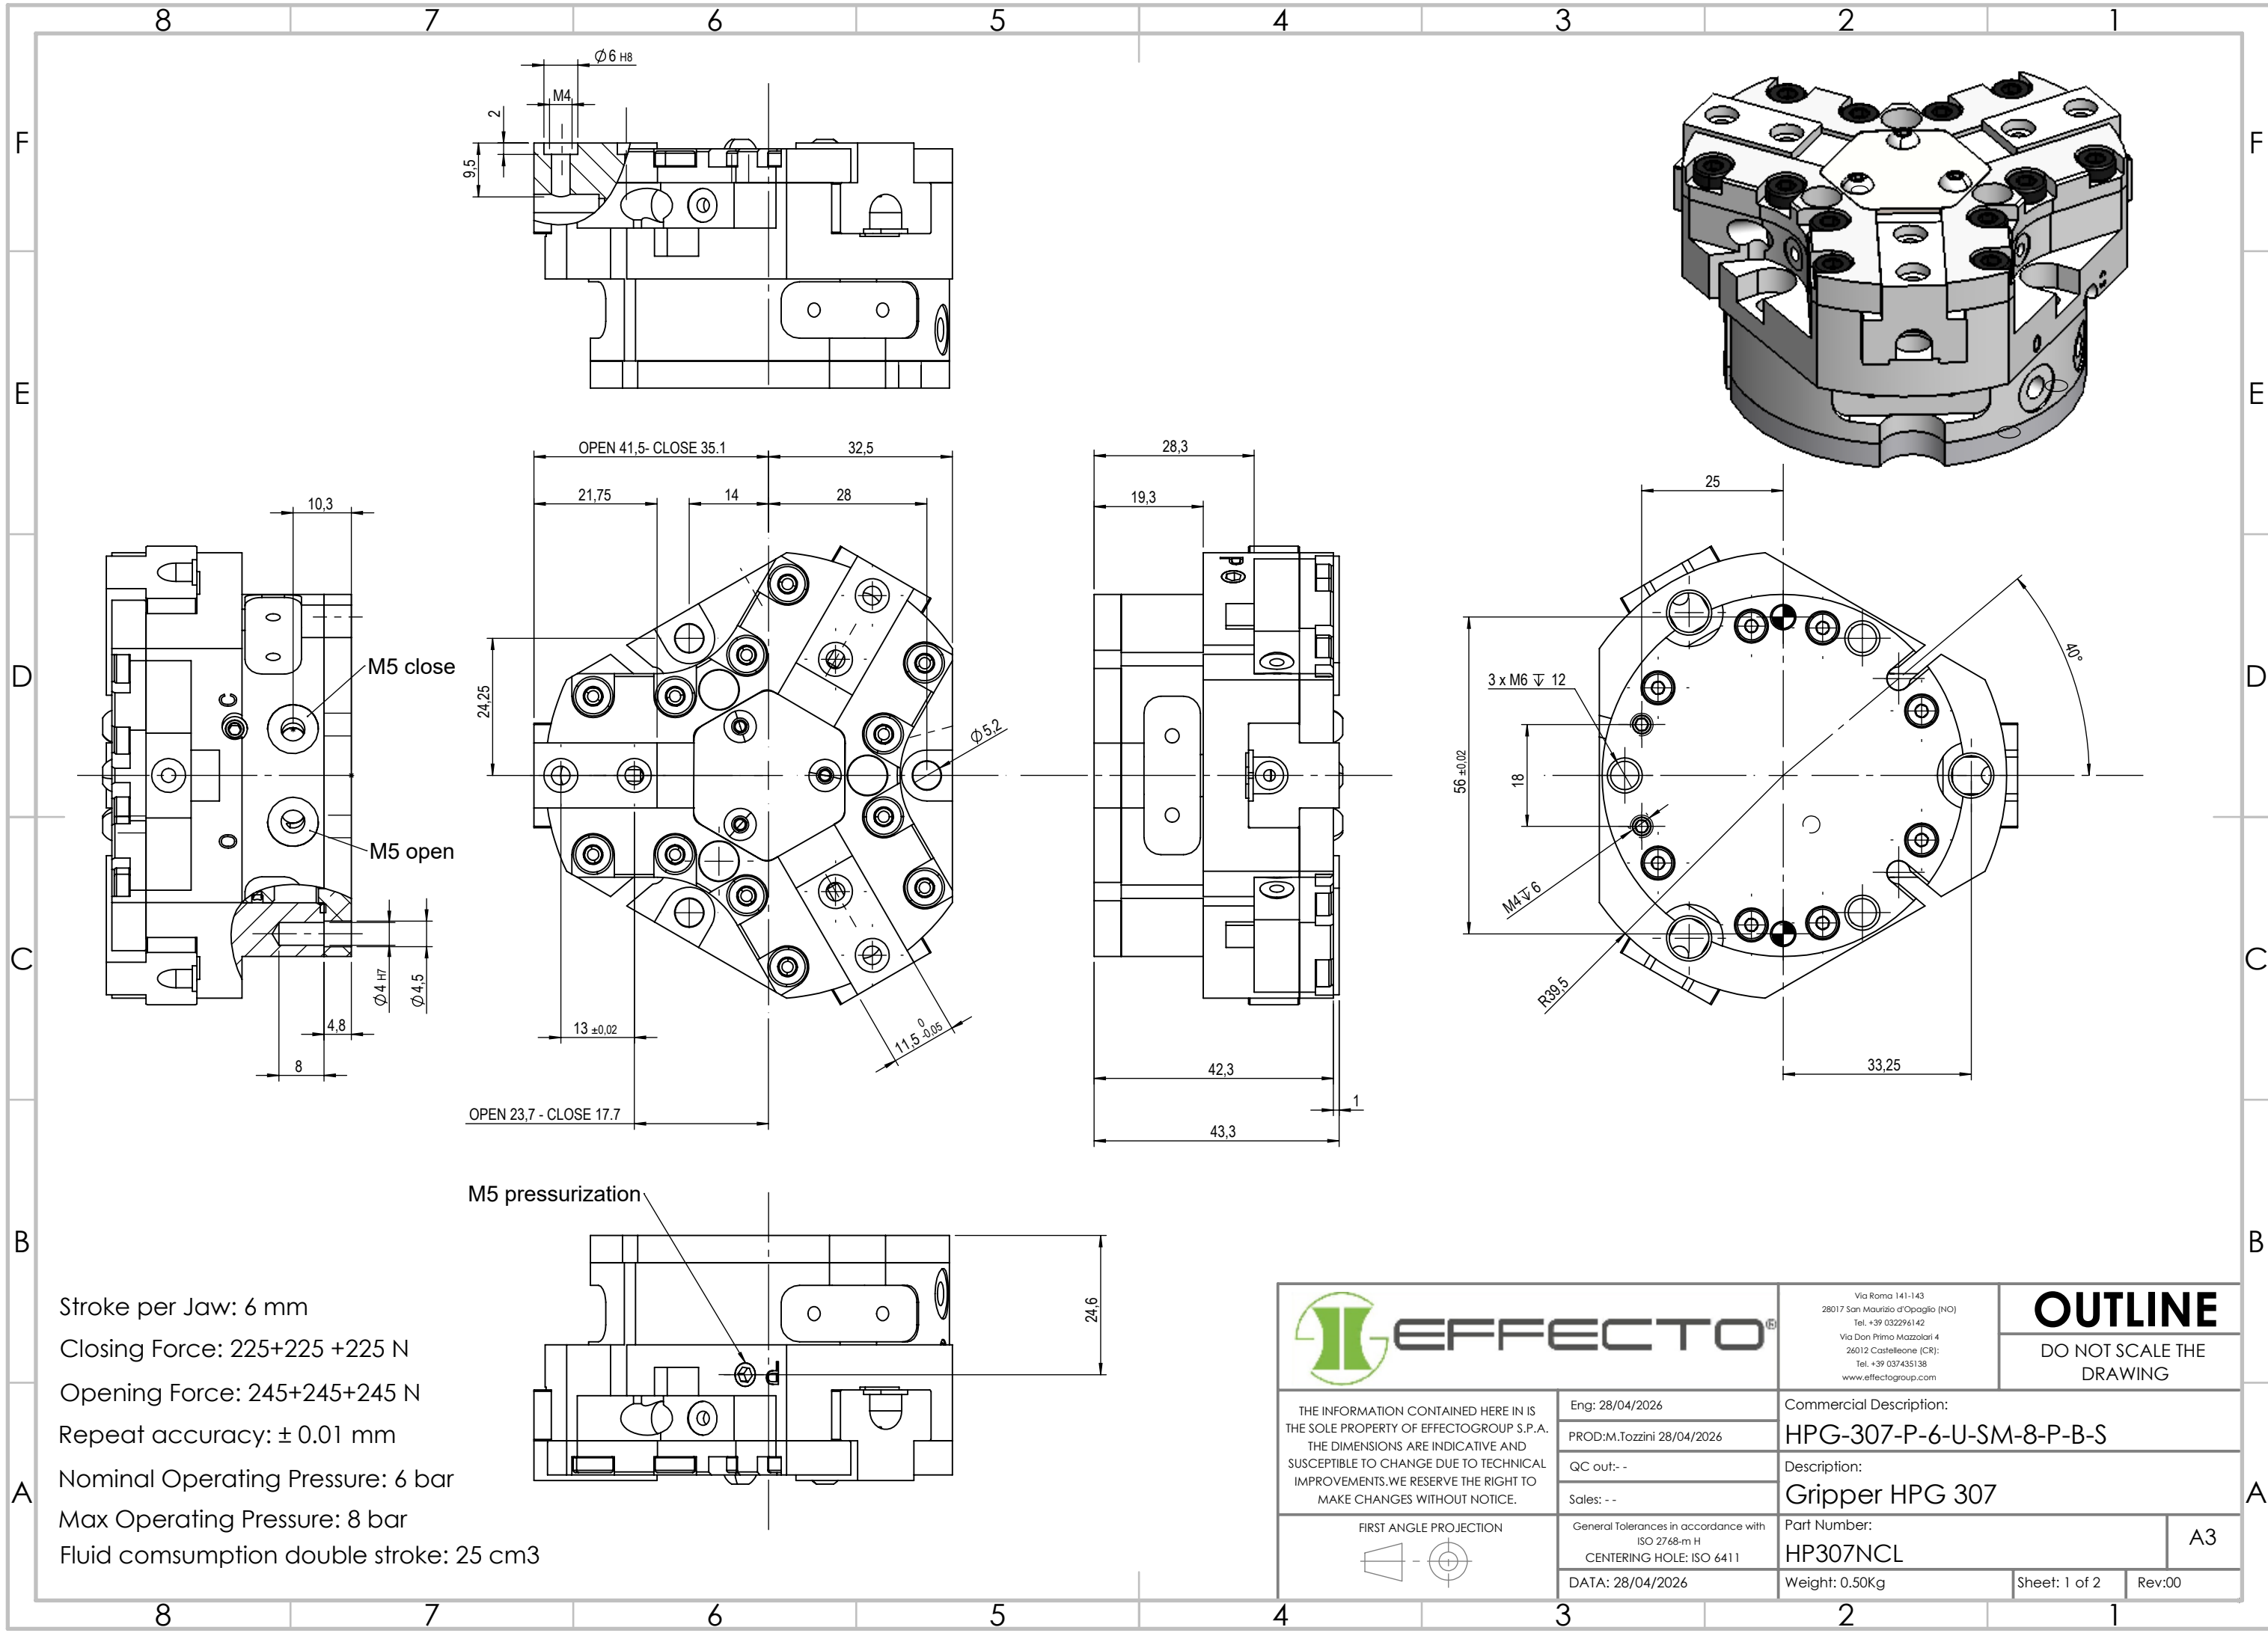

Stroke per Jaw: 6 mm
Closing Force: 225+225 +225 N
Opening Force: 245+245+245 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 25 cm³

 EFFECTO THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 28/04/2026	OUTLINE DO NOT SCALE THE DRAWING	
		PROD: M. Tozzini 28/04/2026		
FIRST ANGLE PROJECTION 		QC out: -	Commercial Description: HPG-307-P-6-U-SM-8-P-B-S	
		Sales: -	Description: Gripper HPG 307	
General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 28/04/2026		Part Number: HP307NCL	A3	
		Weight: 0.50Kg	Sheet: 1 of 2	Rev:00