





Stroke per Jaw: 10 mm
Closing Force: 450+450 +450 N
Opening Force: 850+850+850 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 190 cm³

M5 pressurization

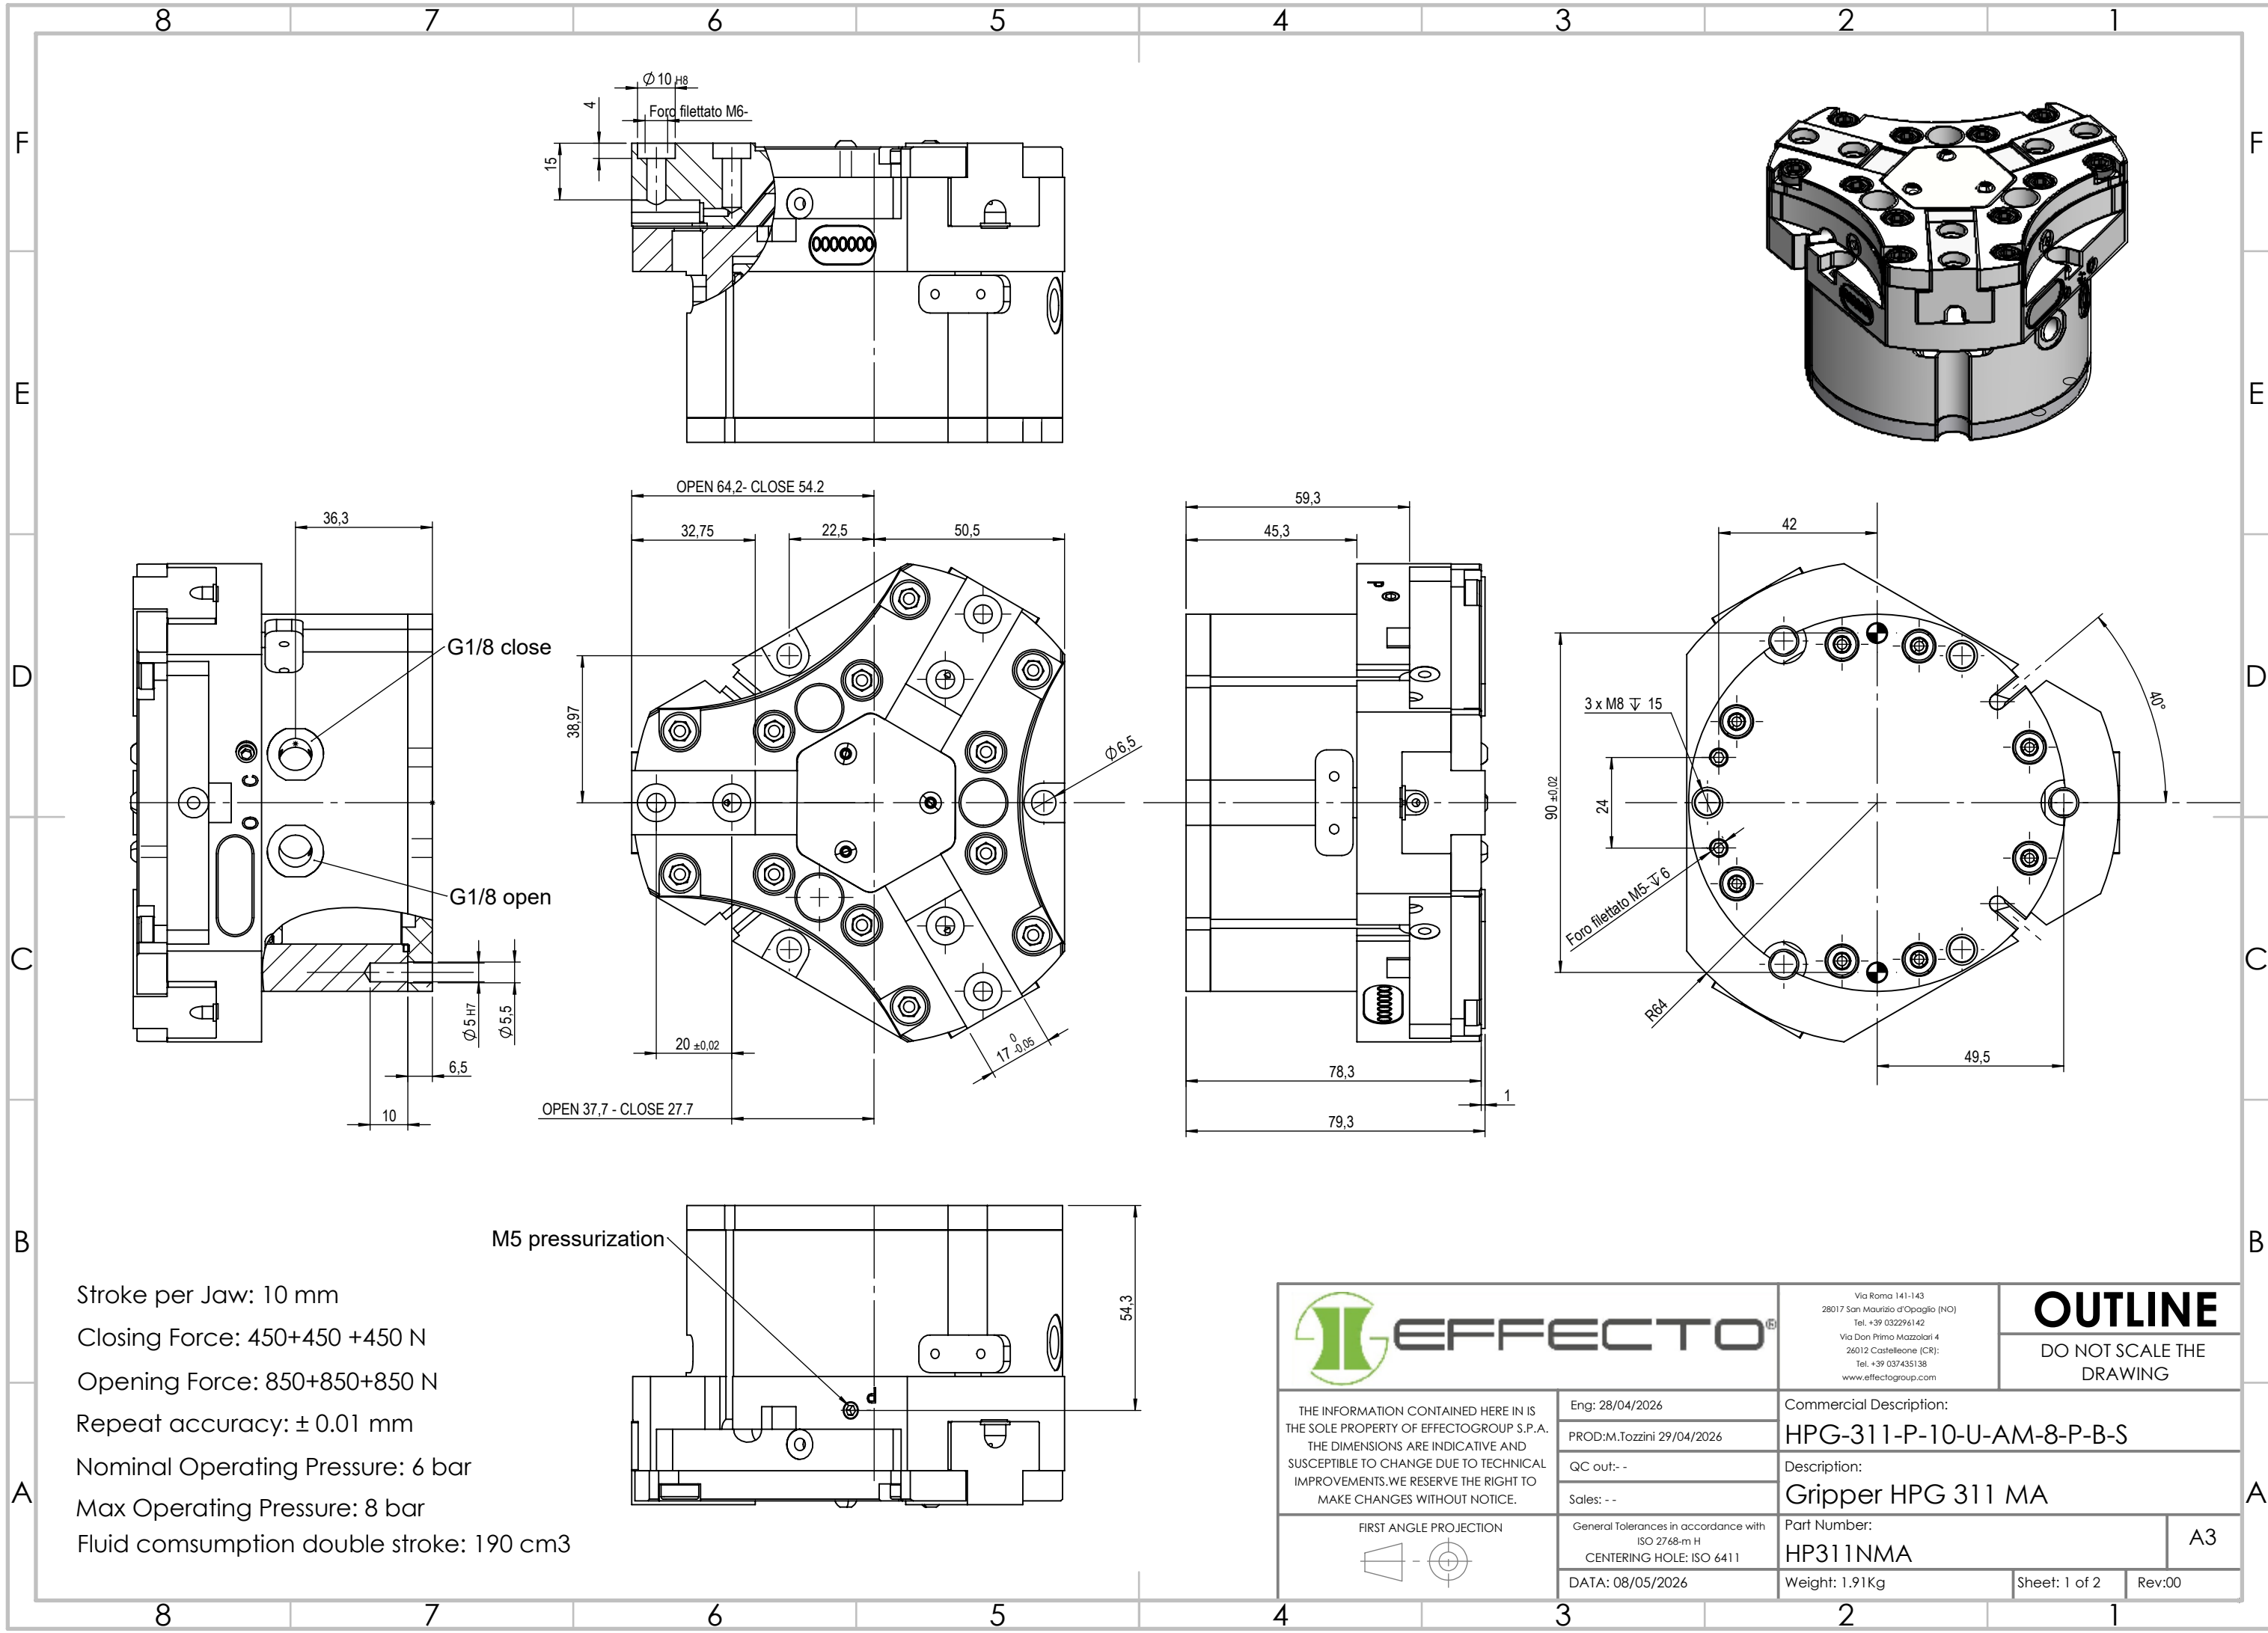

THE INFORMATION CONTAINED HERE IN IS
THE SOLE PROPERTY OF EFFECTO GROUP S.P.A.
THE DIMENSIONS ARE INDICATIVE AND
SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL
IMPROVEMENTS. WE RESERVE THE RIGHT TO
MAKE CHANGES WITHOUT NOTICE.

FIRST ANGLE PROJECTION



Eng: 28/04/2026
PROD: M. Tozzini 29/04/2026
QC out: -
Sales: -
General Tolerances in accordance with
ISO 2768-m H
CENTERING HOLE: ISO 6411
DATA: 08/05/2026

Via Roma 141-143
28017 San Maurizio d'Opaglio (NO)
Tel. +39 032296142
Via Don Primo Mazzolari 4
26012 Castelleone (CR)
Tel. +39 037435138
www.effectogroup.com

OUTLINE
DO NOT SCALE THE
DRAWING

Commercial Description:
HPG-311-P-10-U-AM-8-P-B-S
Description:
Gripper HPG 311 MA
Part Number:
HP311NMA
Weight: 1.91 Kg
Sheet: 1 of 2
Rev: 00

A3