




Stroke per Jaw: 5 mm
Closing Force: 1660+1660 +1660 N
Opening Force: 980+980+980 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 190 cm³


M5 pressurization

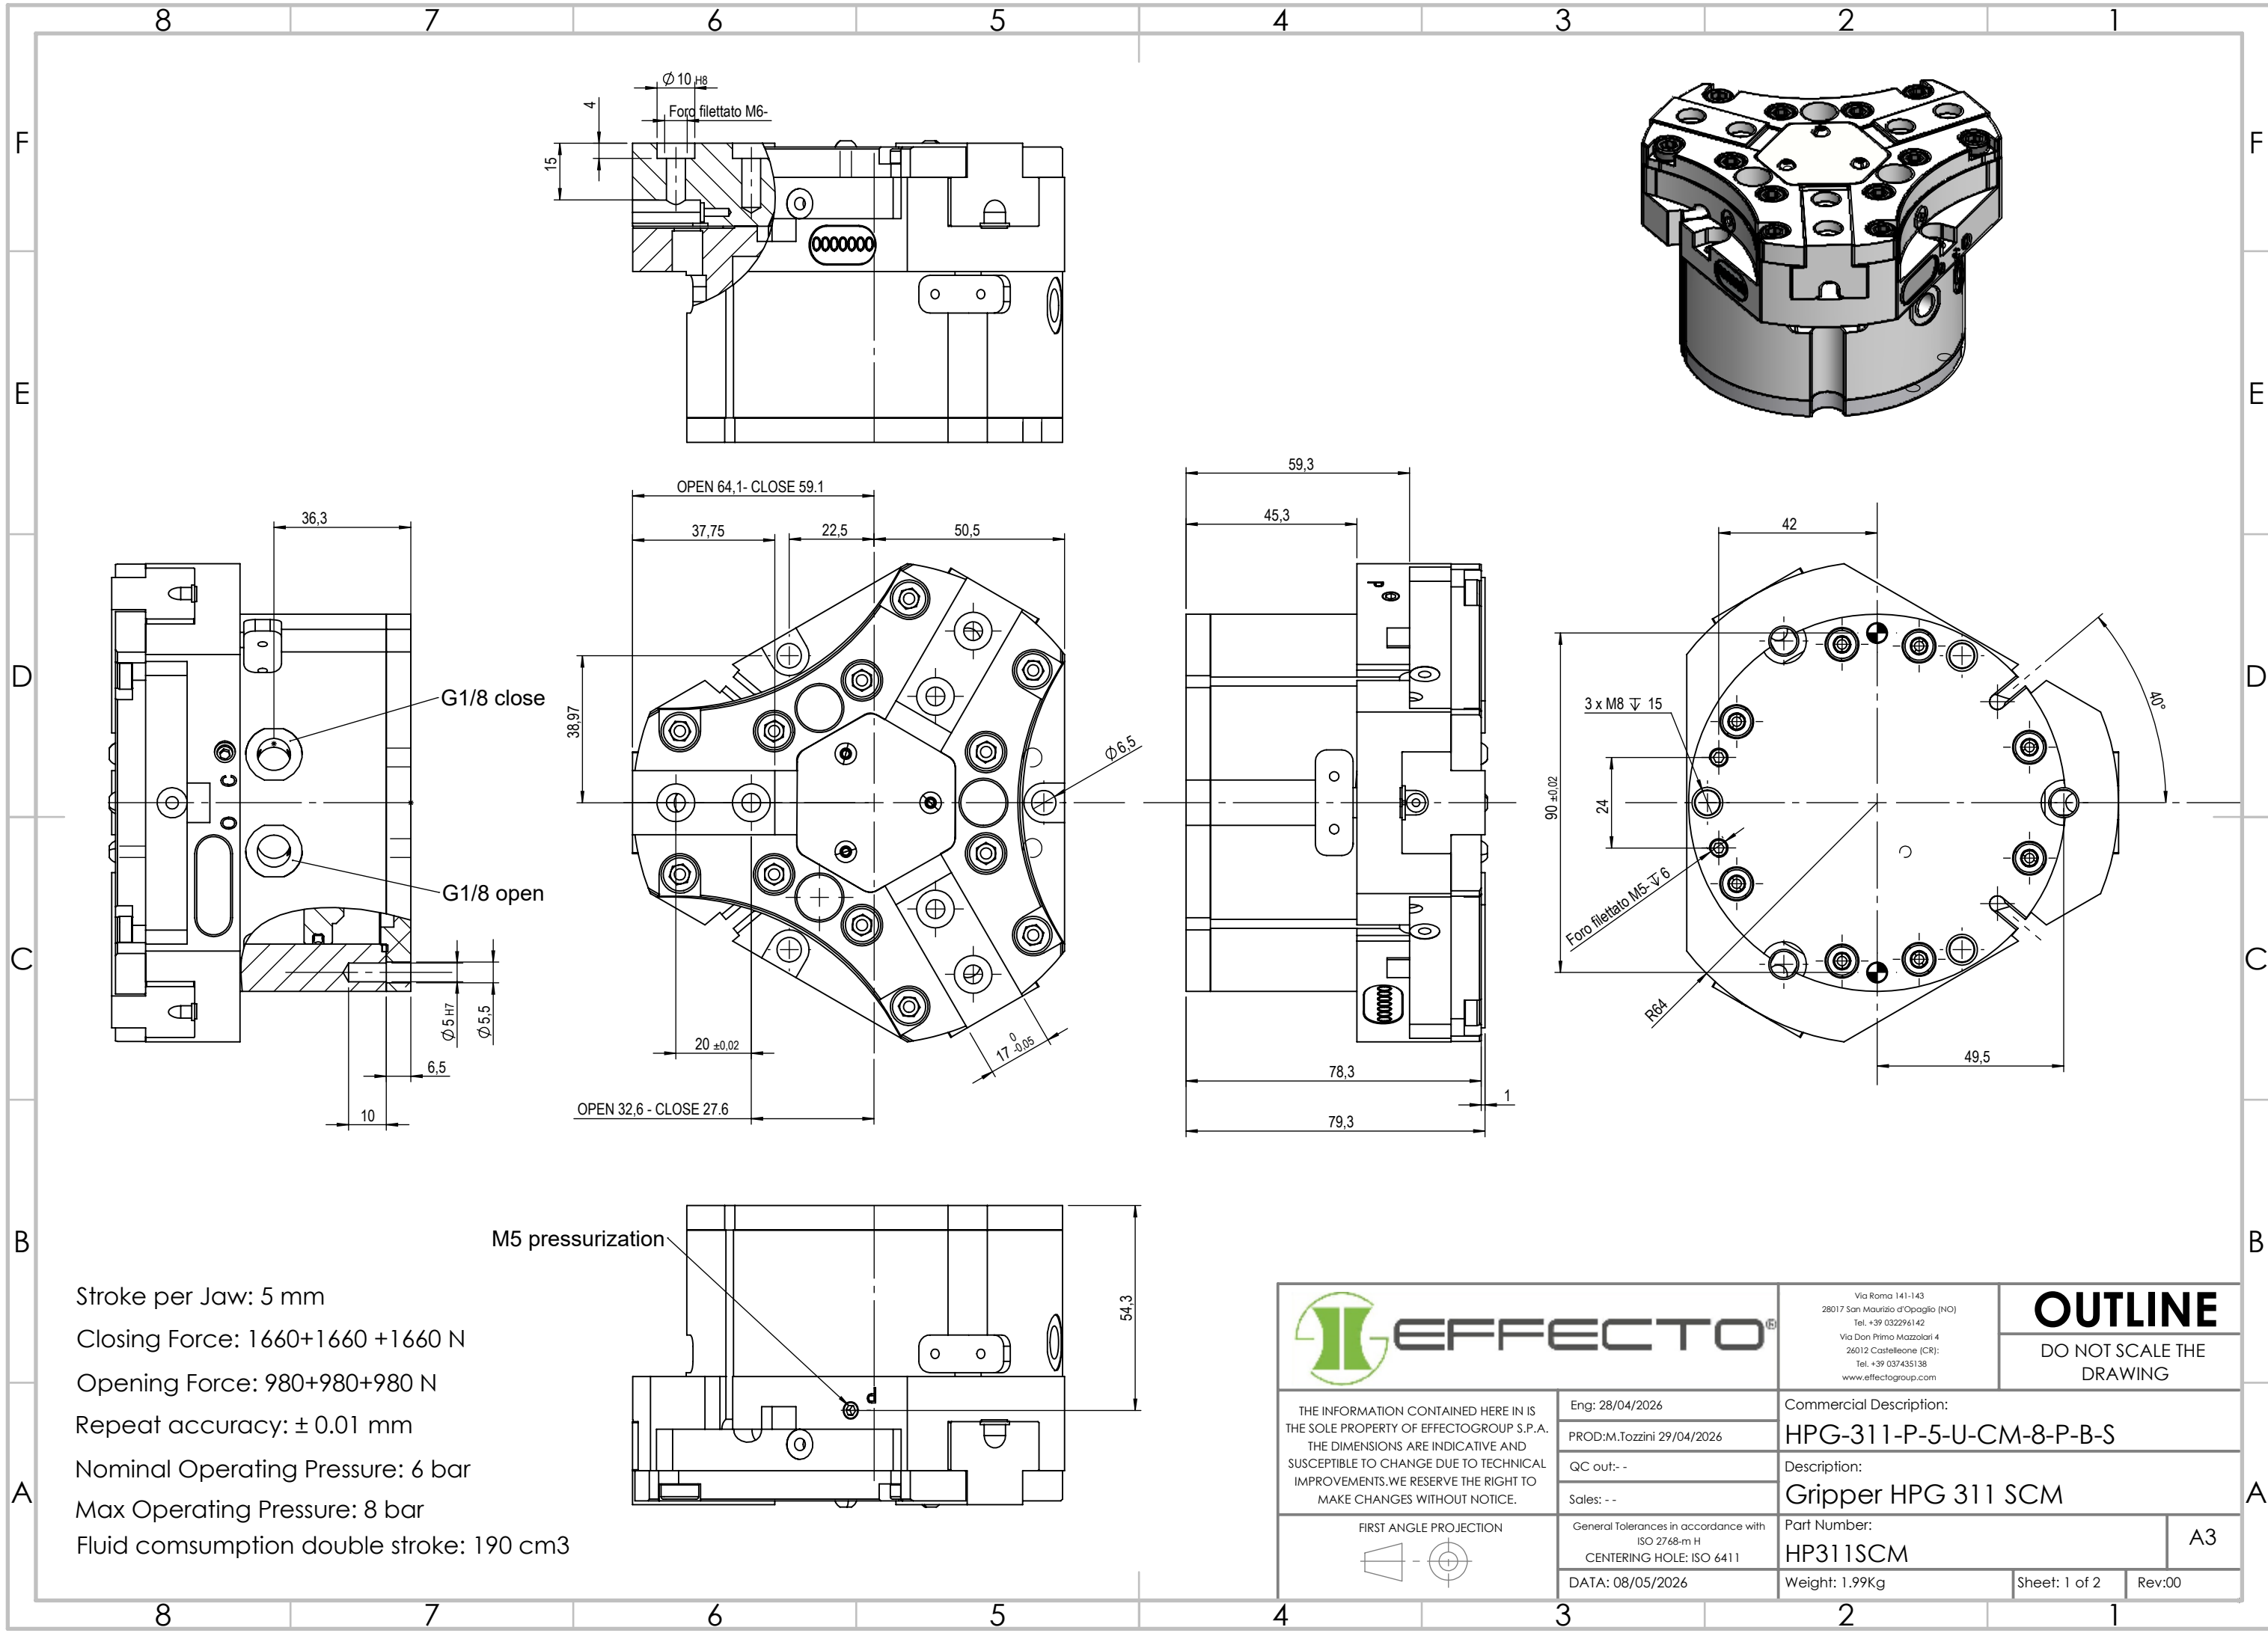

EFFECTO

THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.

FIRST ANGLE PROJECTION



Eng: 28/04/2026

PROD: M. Tozzini 29/04/2026

QC out: -

Sales: -

General Tolerances in accordance with ISO 2768-m H
CENTERING HOLE: ISO 6411

DATA: 08/05/2026

Via Roma 141-143
28017 San Maurizio d'Opaglio (NO)
Tel. +39 032296142
Via Don Primo Mazzolari 4
26012 Castelleone (CR)
Tel. +39 037435138
www.effectogroup.com

OUTLINE

DO NOT SCALE THE DRAWING

Commercial Description:

HPG-311-P-5-U-CM-8-P-B-S

Description:

Gripper HPG 311 SCM

Part Number:

HP311SCM

Weight: 1.99Kg

Sheet: 1 of 2

Rev:00

A3