


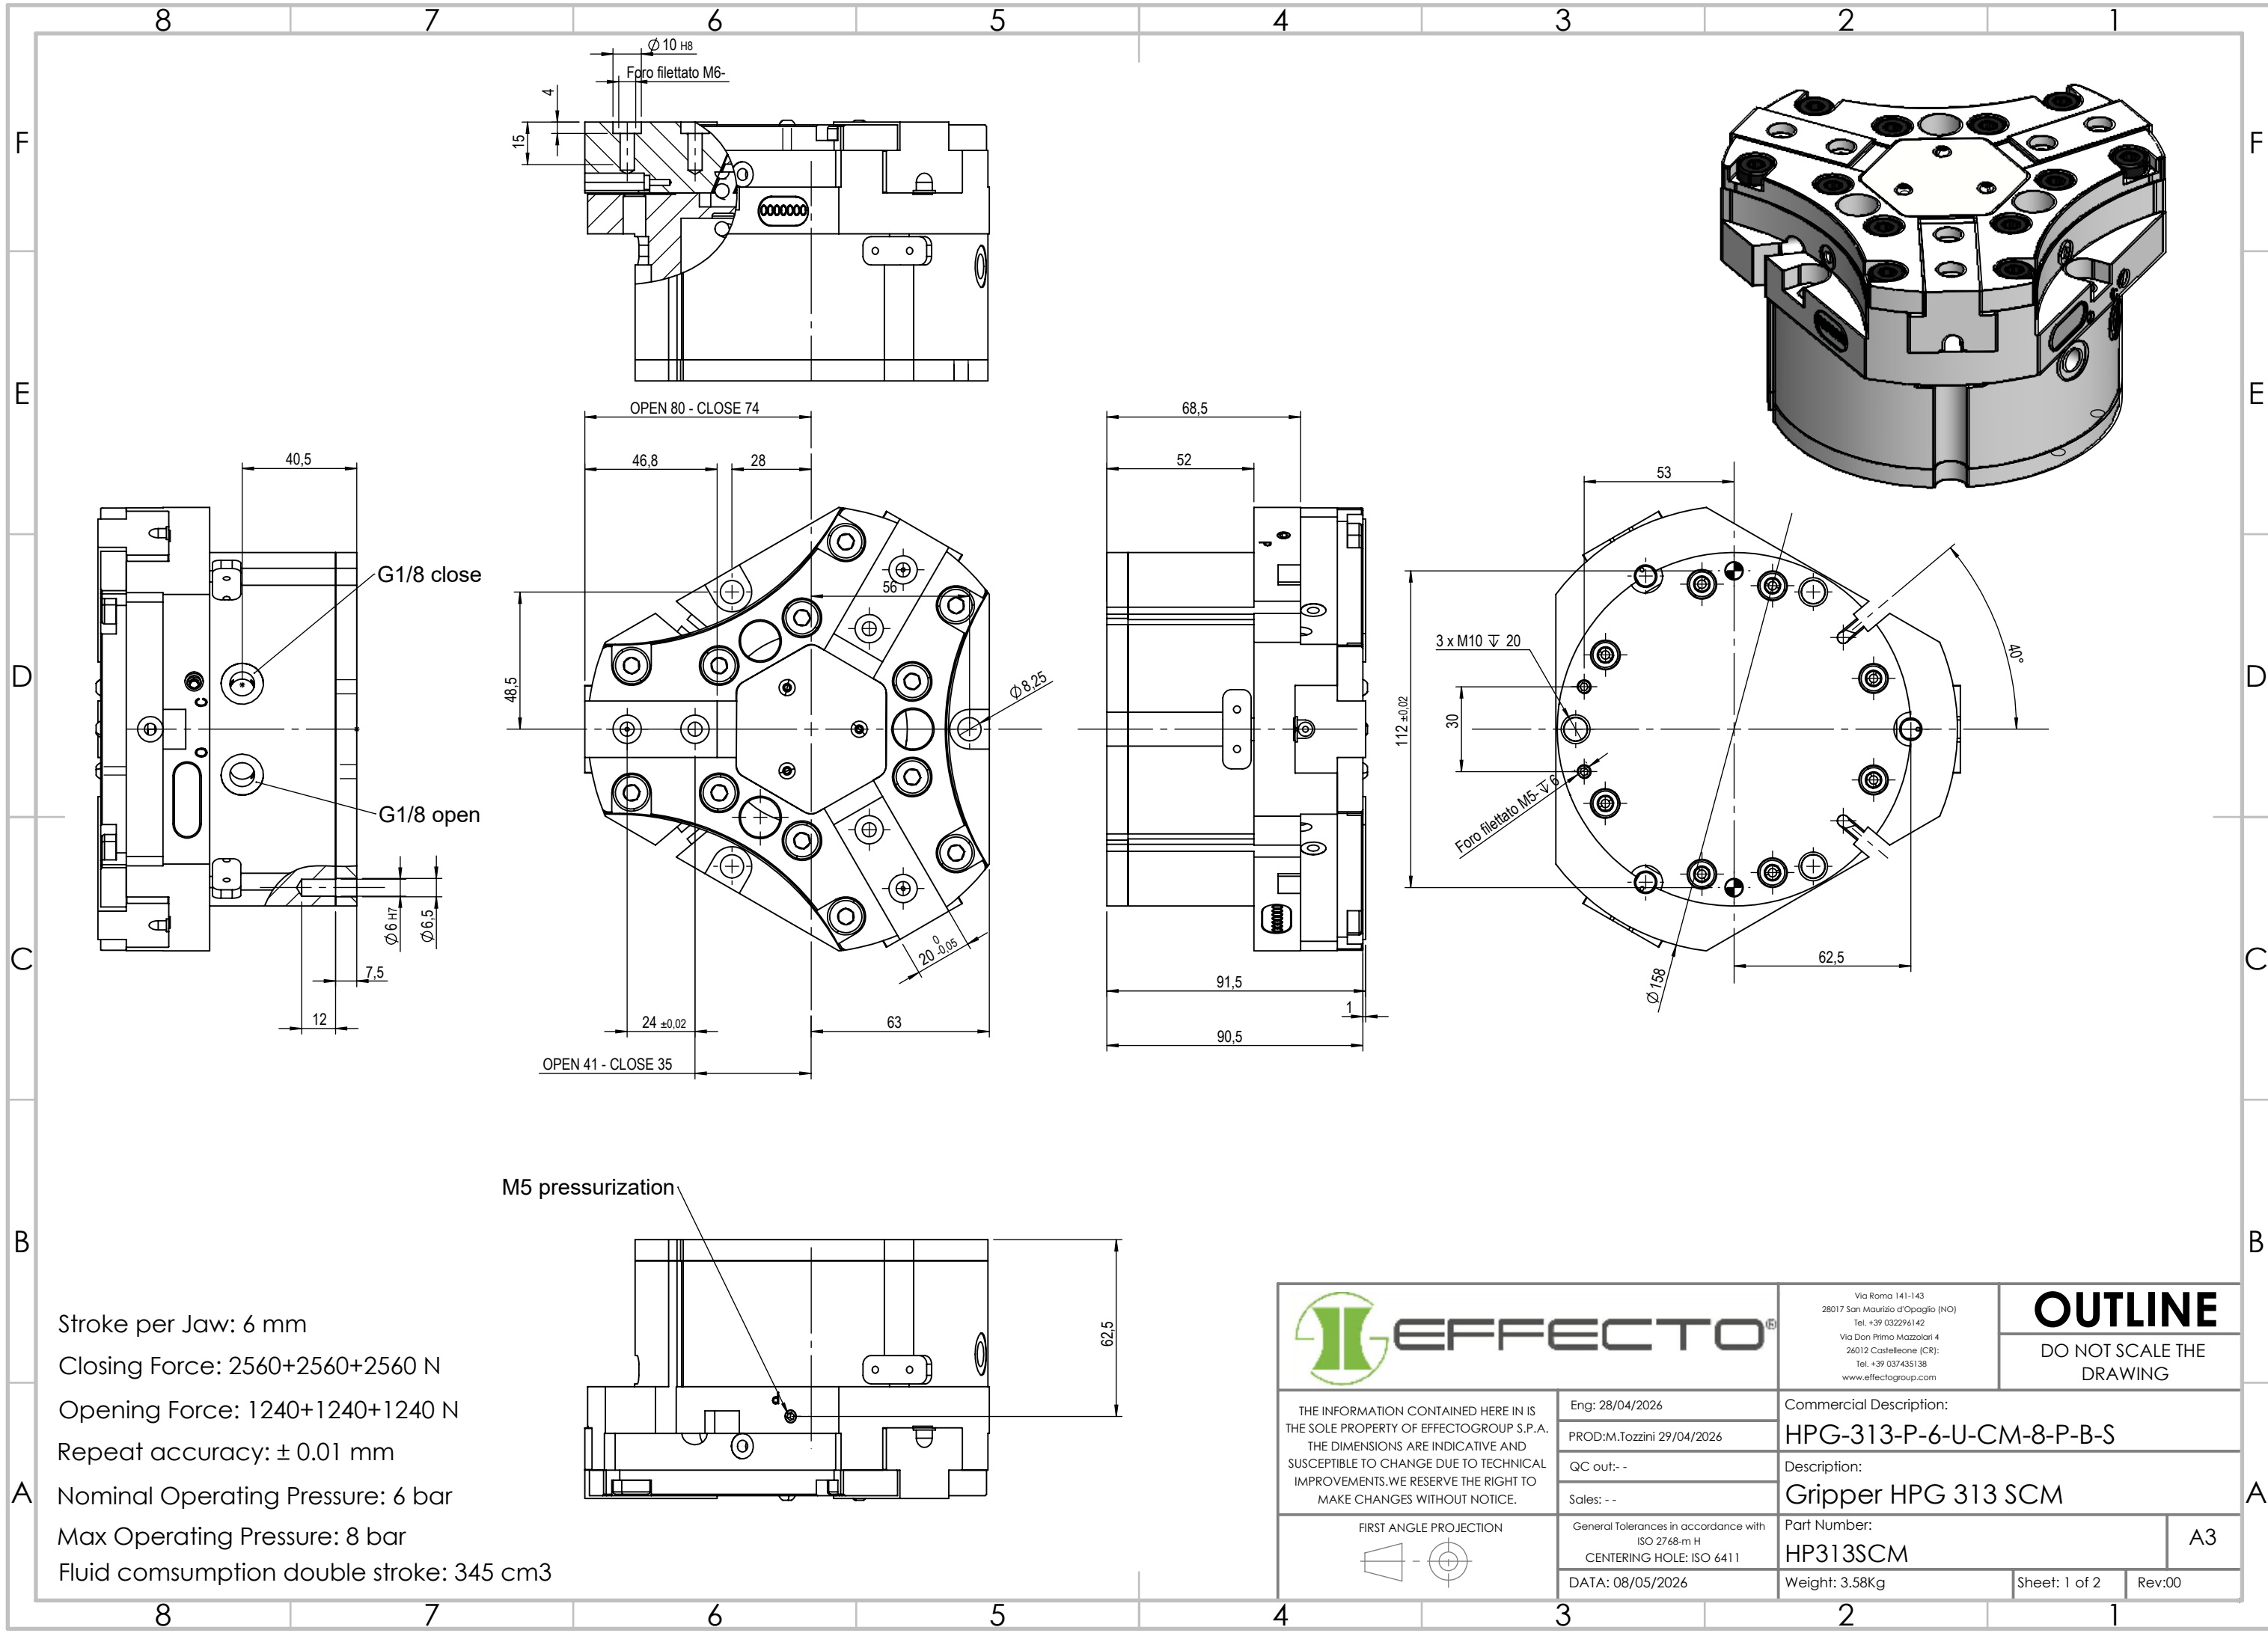

Stroke per Jaw: 6 mm
Closing Force: 2560+2560+2560 N
Opening Force: 1240+1240+1240 N
Repeat accuracy: ± 0.01 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 345 cm3

M5 pressurization

 EFFECTO THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
		Eng: 28/04/2026 PROD: M. Tozzini 29/04/2026 QC out: - Sales: -		Commercial Description: HPG-313-P-6-U-CM-8-P-B-S Description: Gripper HPG 313 SCM	
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 08/05/2026		Part Number: HP313SCM	A3
		Weight: 3.58Kg		Sheet: 1 of 2	Rev:00