
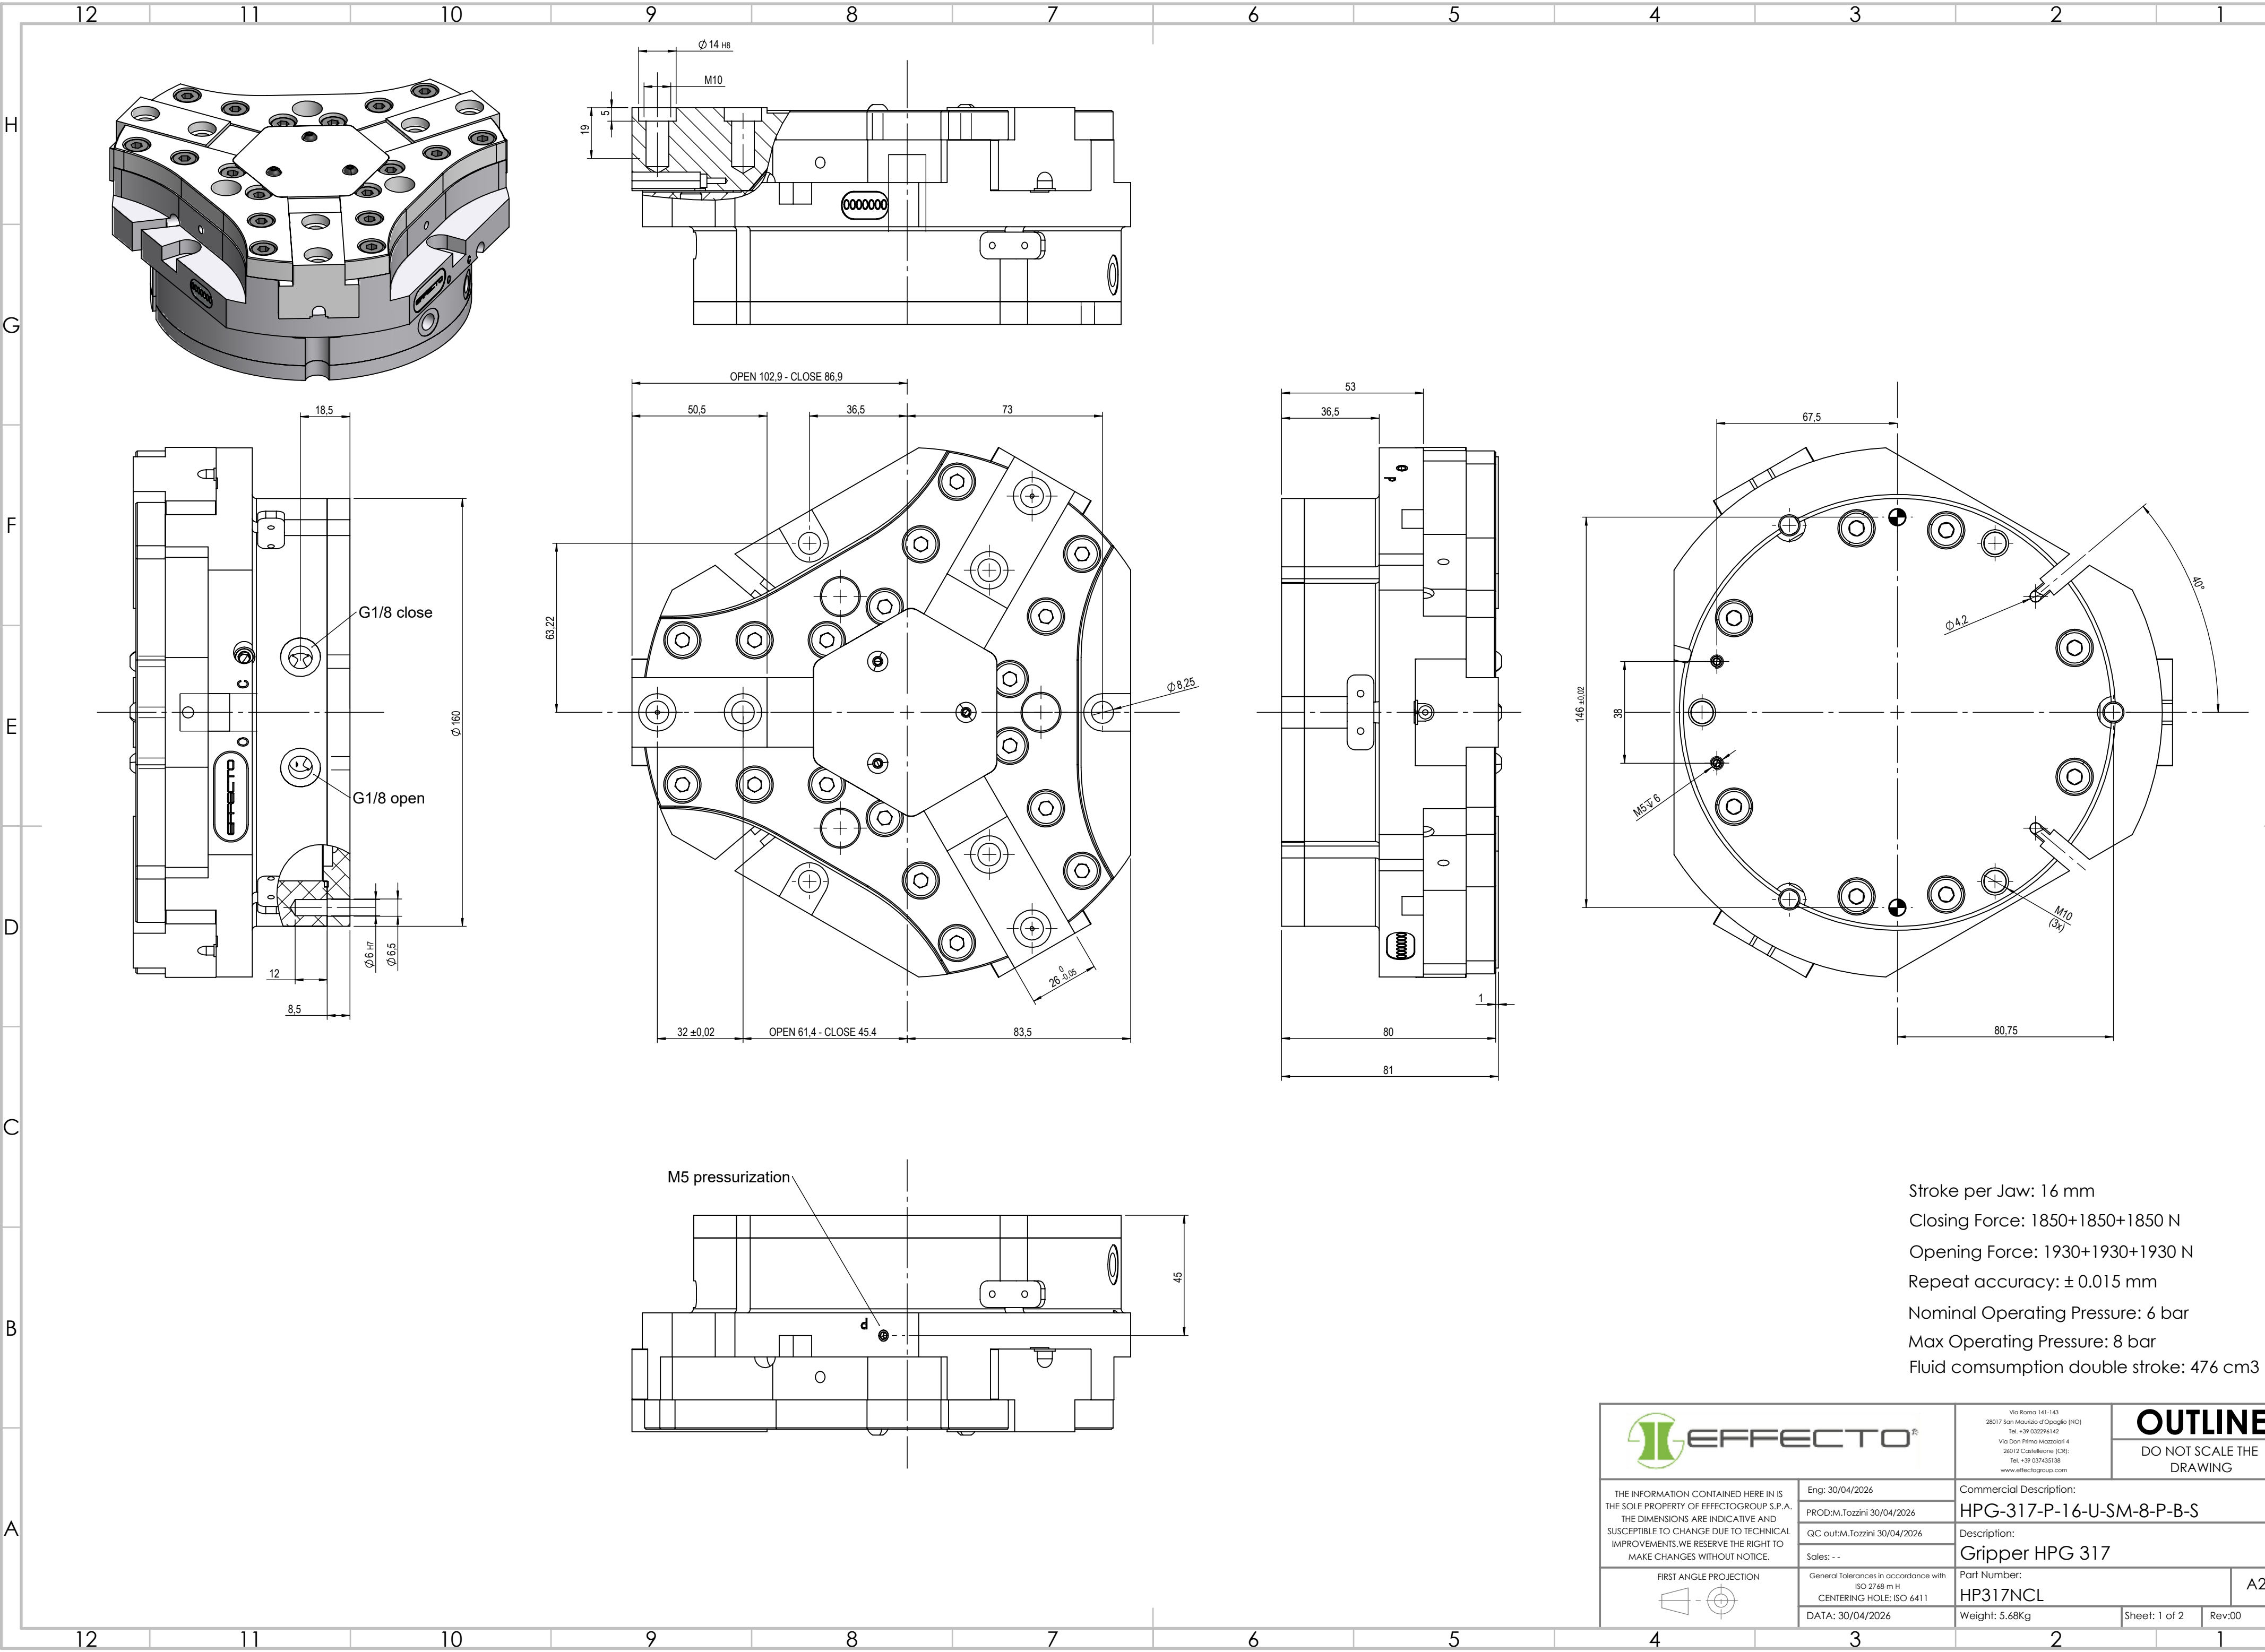




Stroke per Jaw: 16 mm
Closing Force: 1850+1850+1850 N
Opening Force: 1930+1930+1930 N
Repeat accuracy: ± 0.015 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 476 cm3

		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 28012 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
		Eng: 30/04/2026 PROD:M.Tozzini 30/04/2026 QC out:M.Tozzini 30/04/2026 Sales: - -		Commercial Description: HPG-317-P-16-U-SM-8-P-B-S Description: Gripper HPG 317	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 30/04/2026		Part Number: HP317NCL Weight: 5.68Kg	
FIRST ANGLE PROJECTION 				A2 Sheet: 1 of 2 Rev:00	