
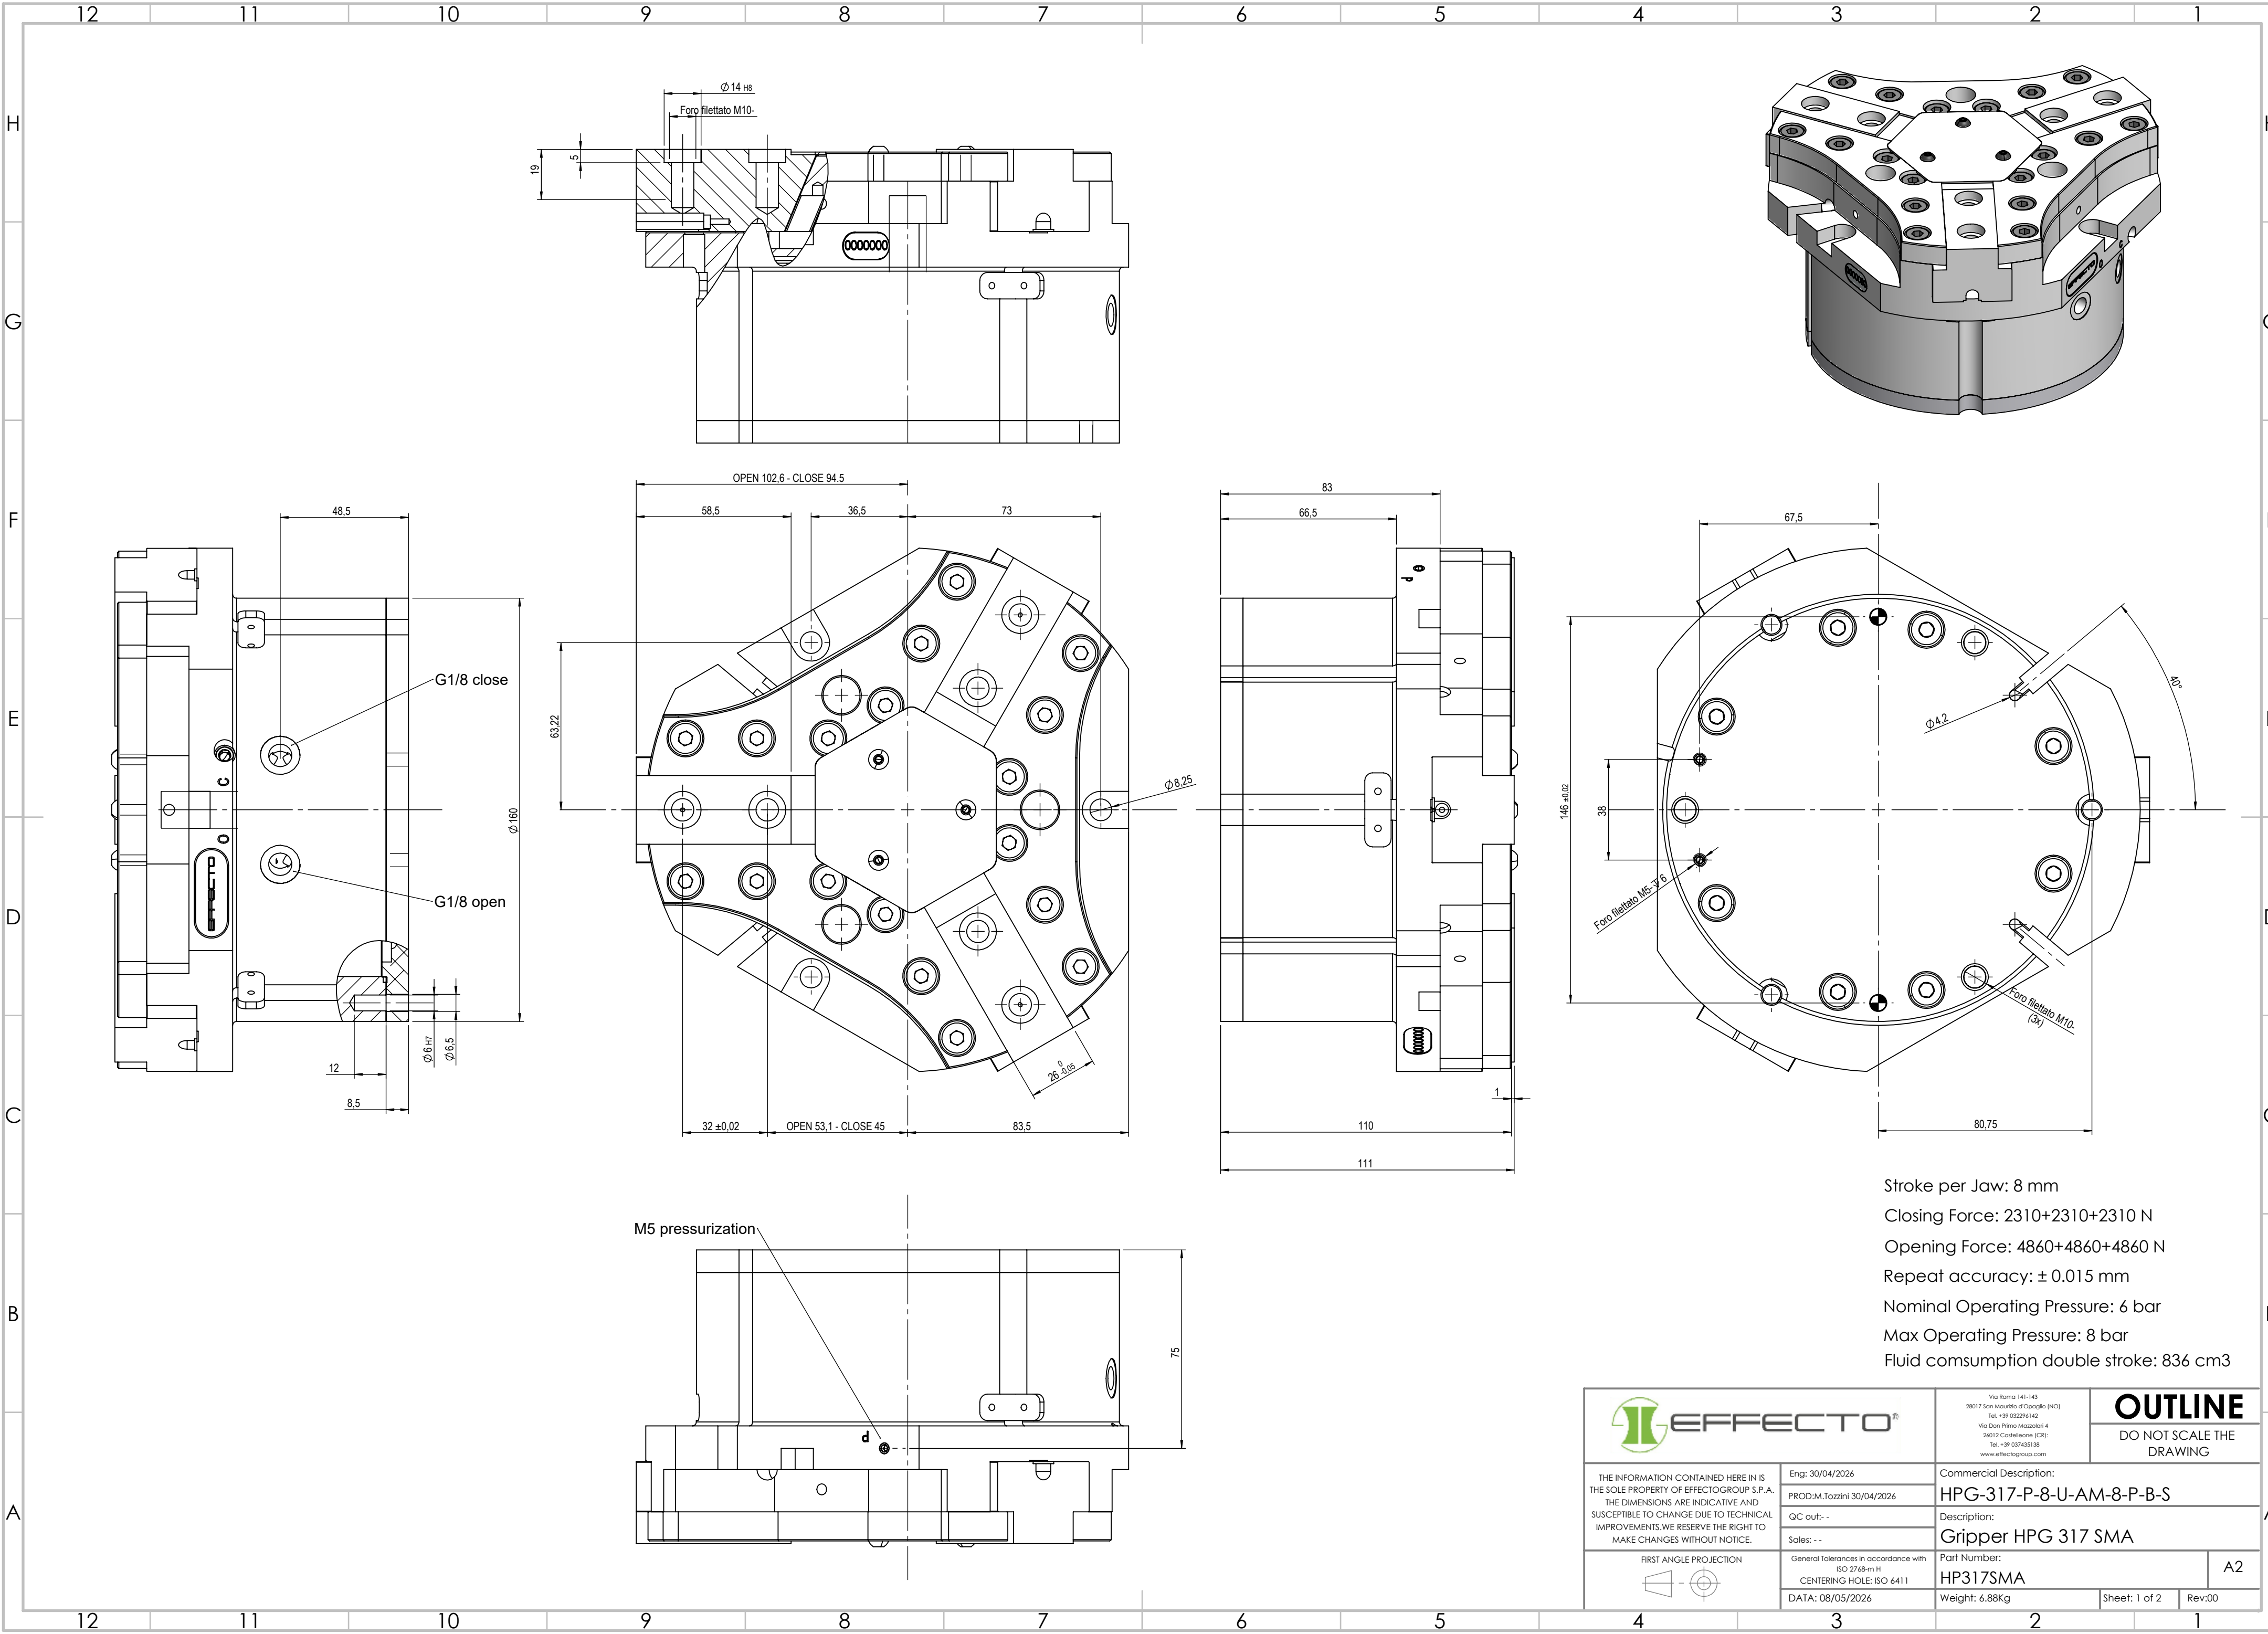




Stroke per Jaw: 8 mm
Closing Force: 2310+2310+2310 N
Opening Force: 4860+4860+4860 N
Repeat accuracy: ± 0.015 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 836 cm³

 THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 30/04/2026	Commercial Description:	
	PROD: M. Tozzini 30/04/2026	HPG-317-P-8-U-AM-8-P-B-S	
	QC out: -	Description:	
	Sales: -	Gripper HPG 317 SMA	
	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411	Part Number:	A2
	DATA: 08/05/2026	HP317SMA	
		Weight: 6.88Kg	Sheet: 1 of 2 Rev:00