
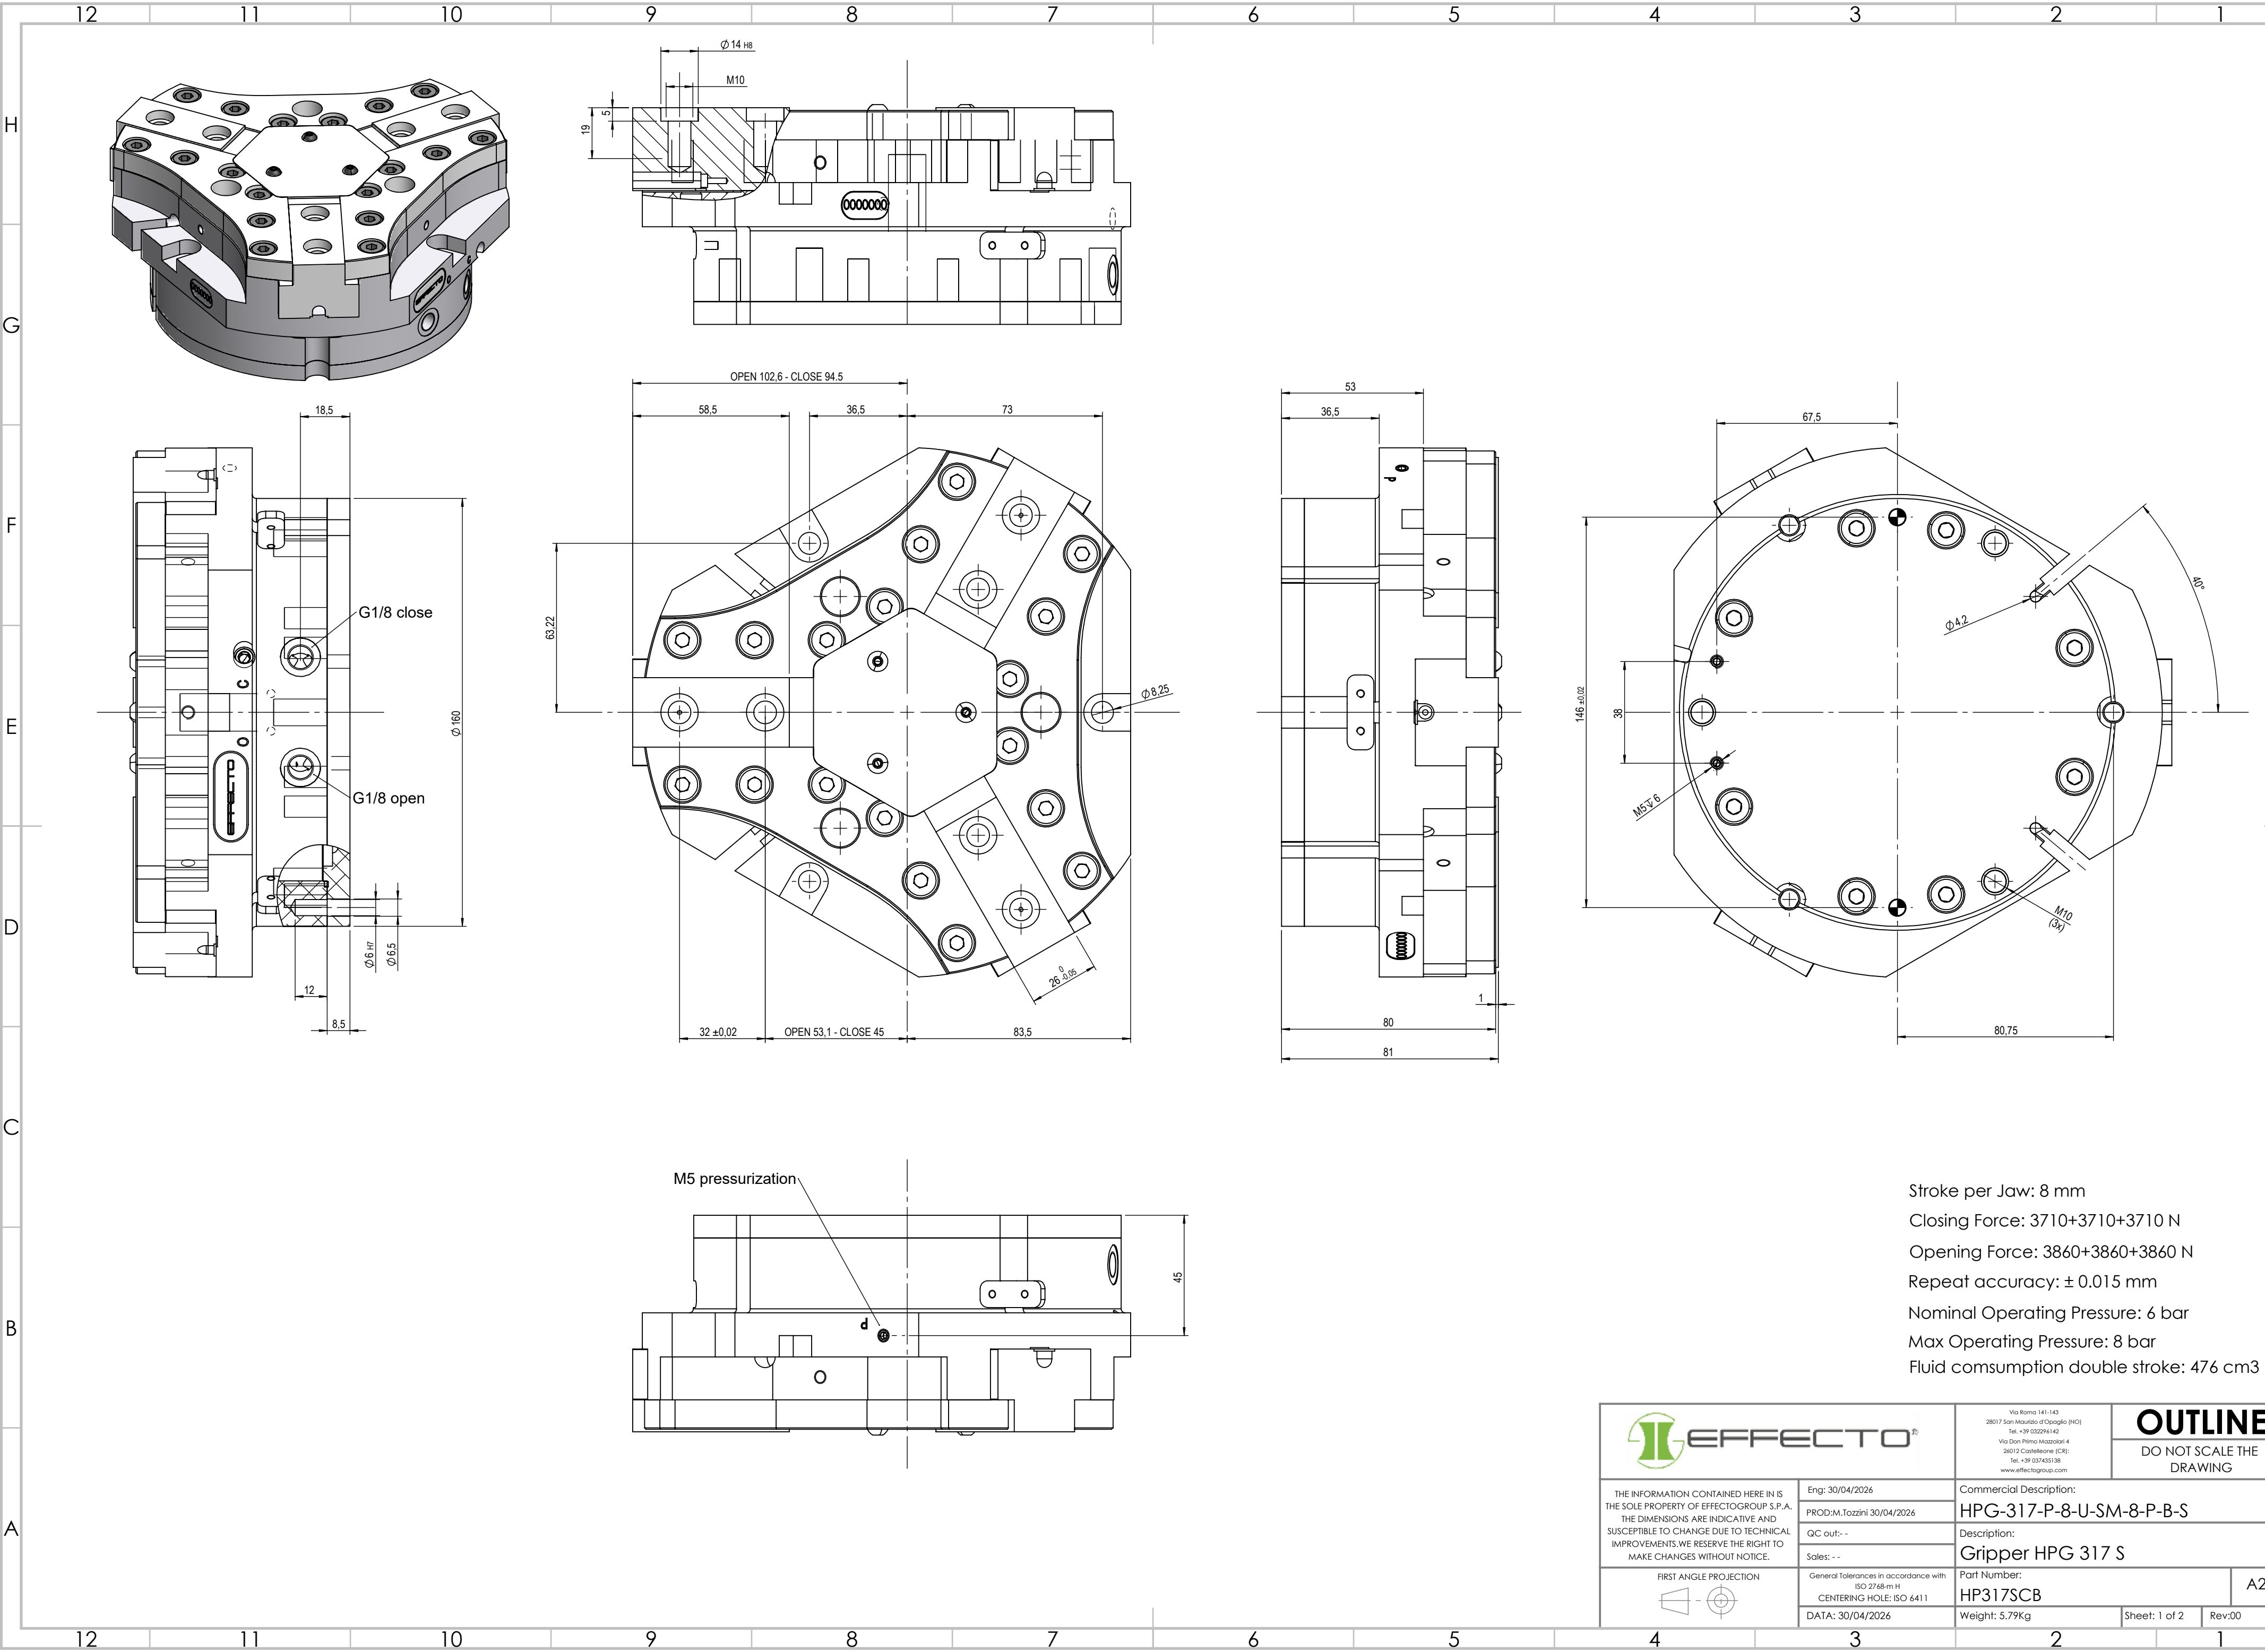




Stroke per Jaw: 8 mm
Closing Force: 3710+3710+3710 N
Opening Force: 3860+3860+3860 N
Repeat accuracy: ± 0.015 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 476 cm3

		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 03296142 Via Don Primo Mazzolari 4 28013 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
		Eng: 30/04/2026		Commercial Description:	
		PROD:M.Tozzini 30/04/2026		HPG-317-P-8-U-SM-8-P-B-S	
		QC out: -		Description:	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Sales: - -		Gripper HPG 317 S	
		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:	
		DATA: 30/04/2026		HP317SCB	
				Weight: 5.79Kg	
FIRST ANGLE PROJECTION 				Sheet: 1 of 2	
				Rev:00	
				A2	