


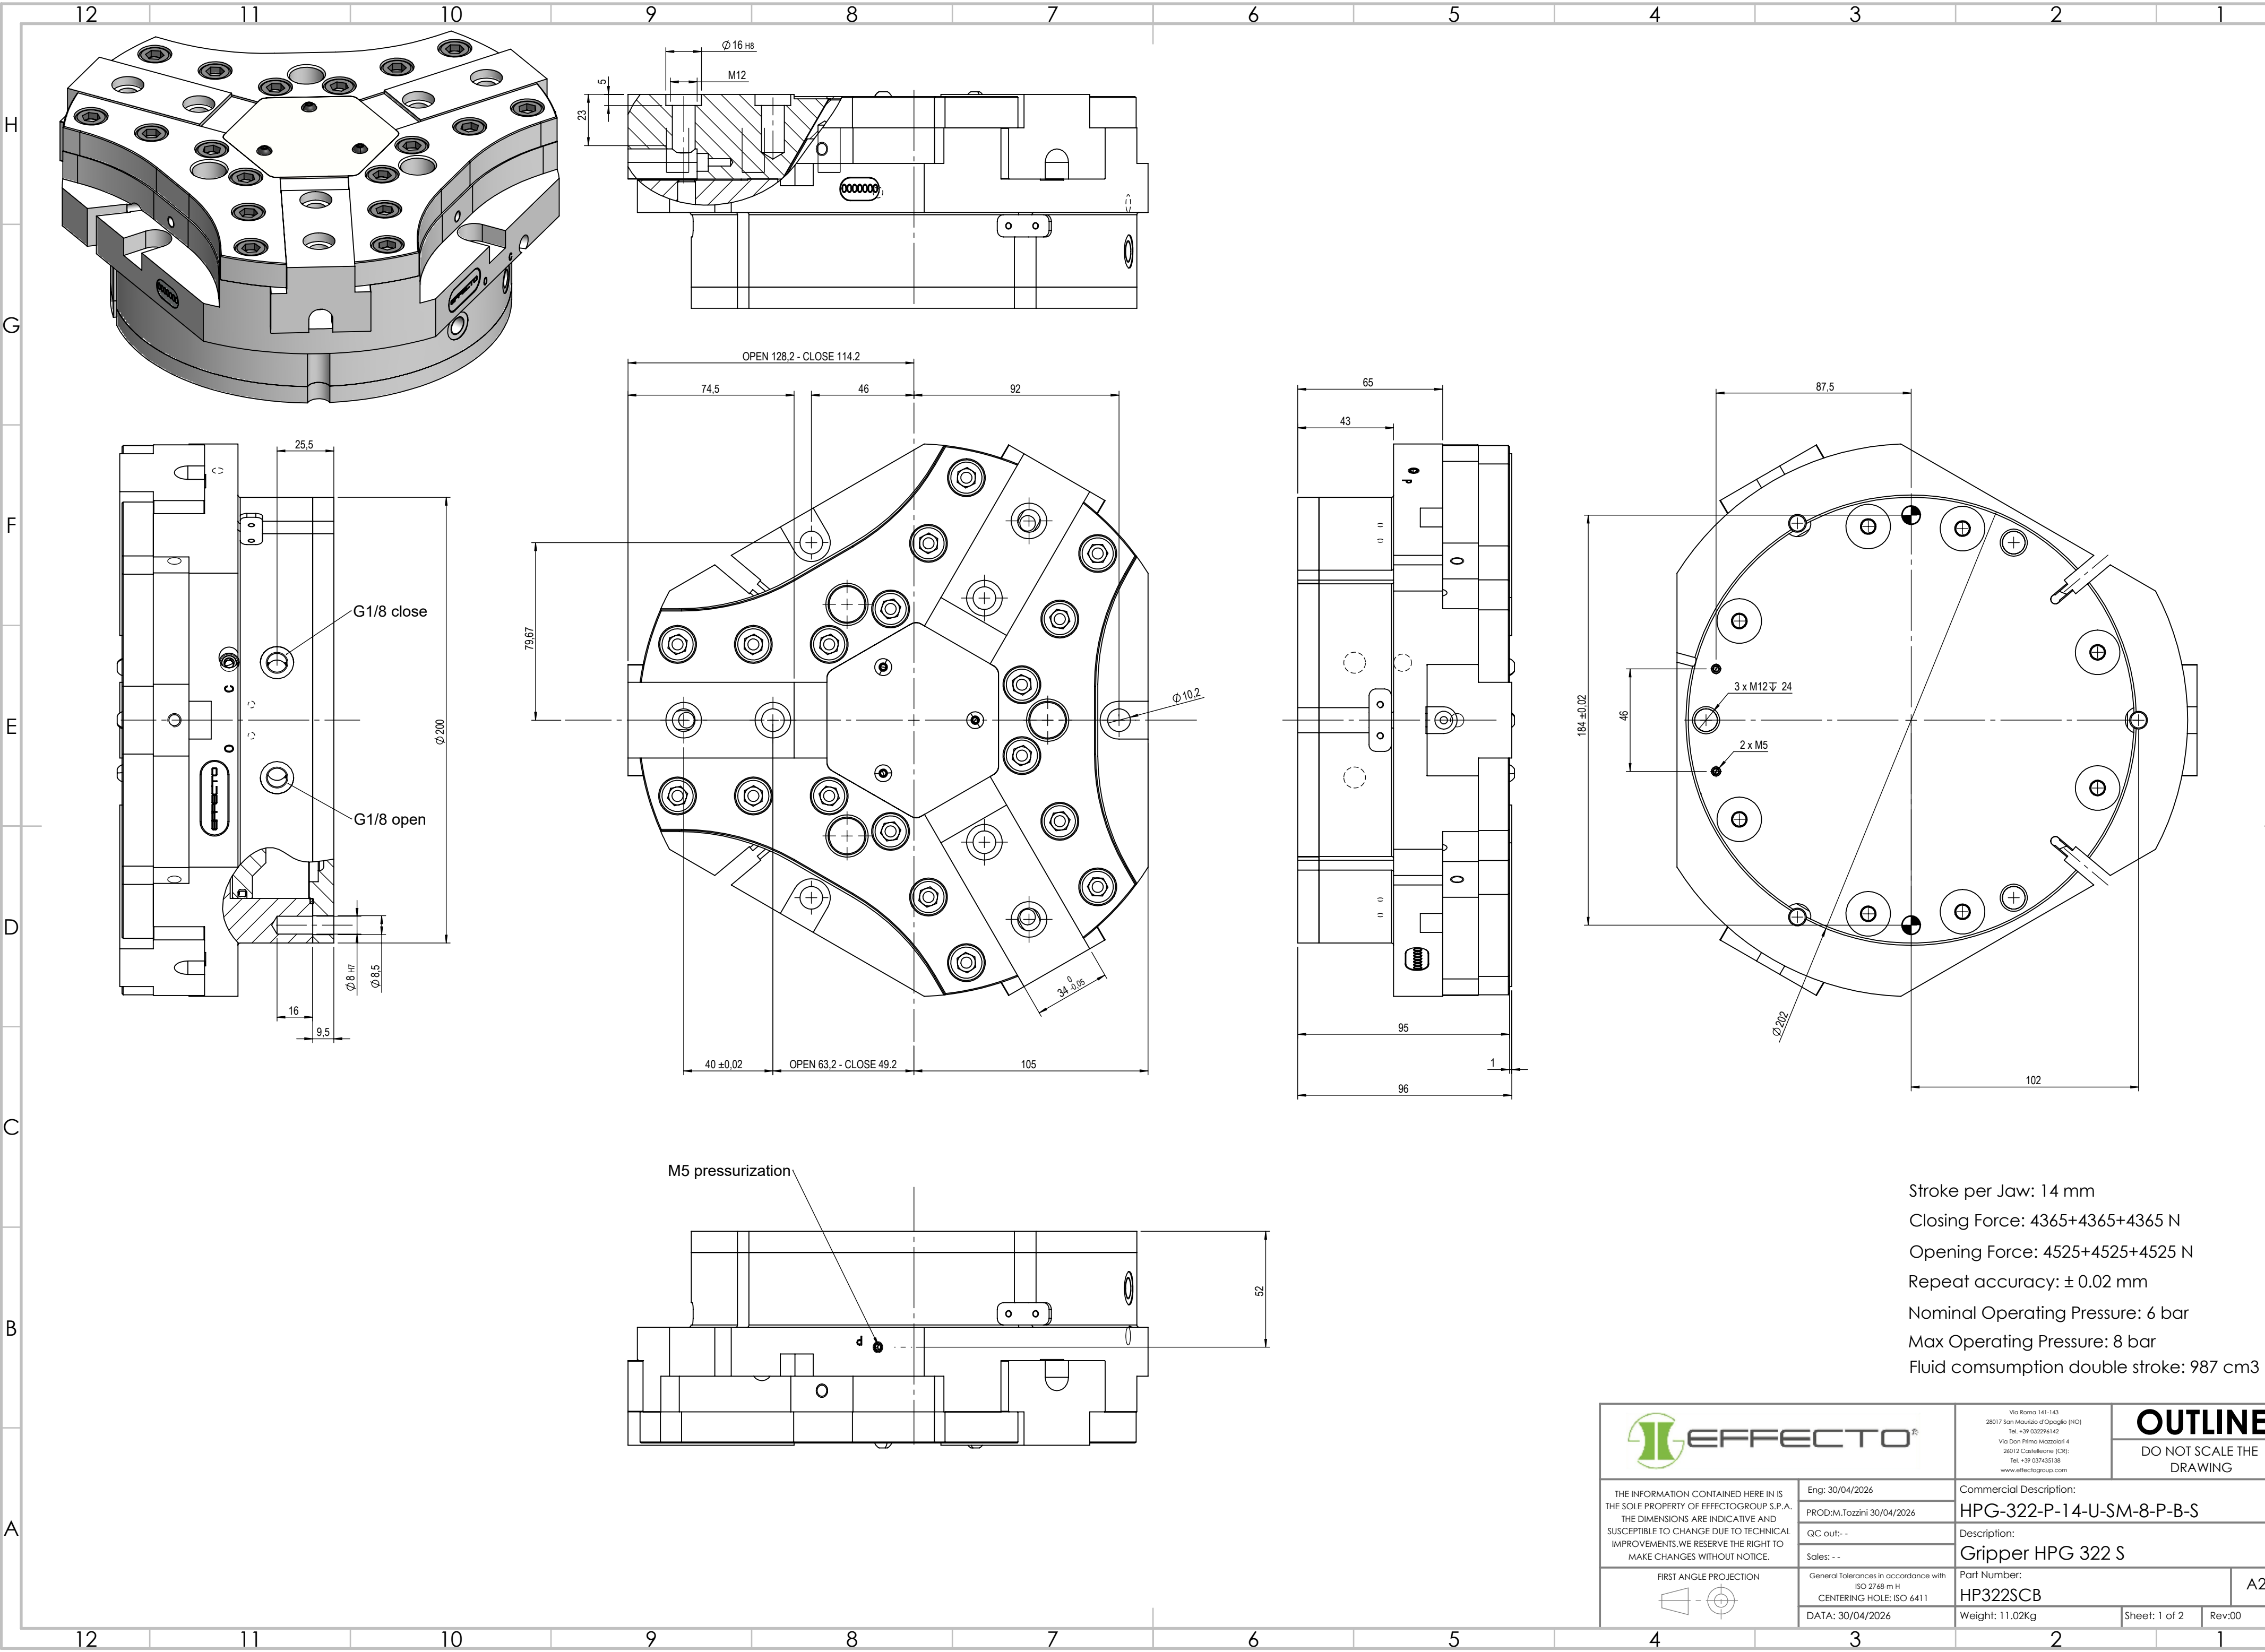

Stroke per Jaw: 14 mm
Closing Force: 4365+4365+4365 N
Opening Force: 4525+4525+4525 N
Repeat accuracy: ± 0.02 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 987 cm3

 EFFECTO®		Via Roma 141-143 26017 San Maurizio d'Oggio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTOGRUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 30/04/2026		Commercial Description:		
	PROD:M.Tozzini 30/04/2026		HPG-322-P-14-U-SM-8-P-B-S		
	QC out: -		Description:		
	Sales: - -		Gripper HPG 322 S		
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:		A2
			HP322SCB		
	DATA: 30/04/2026		Weight: 11.02Kg		Sheet: 1 of 2