


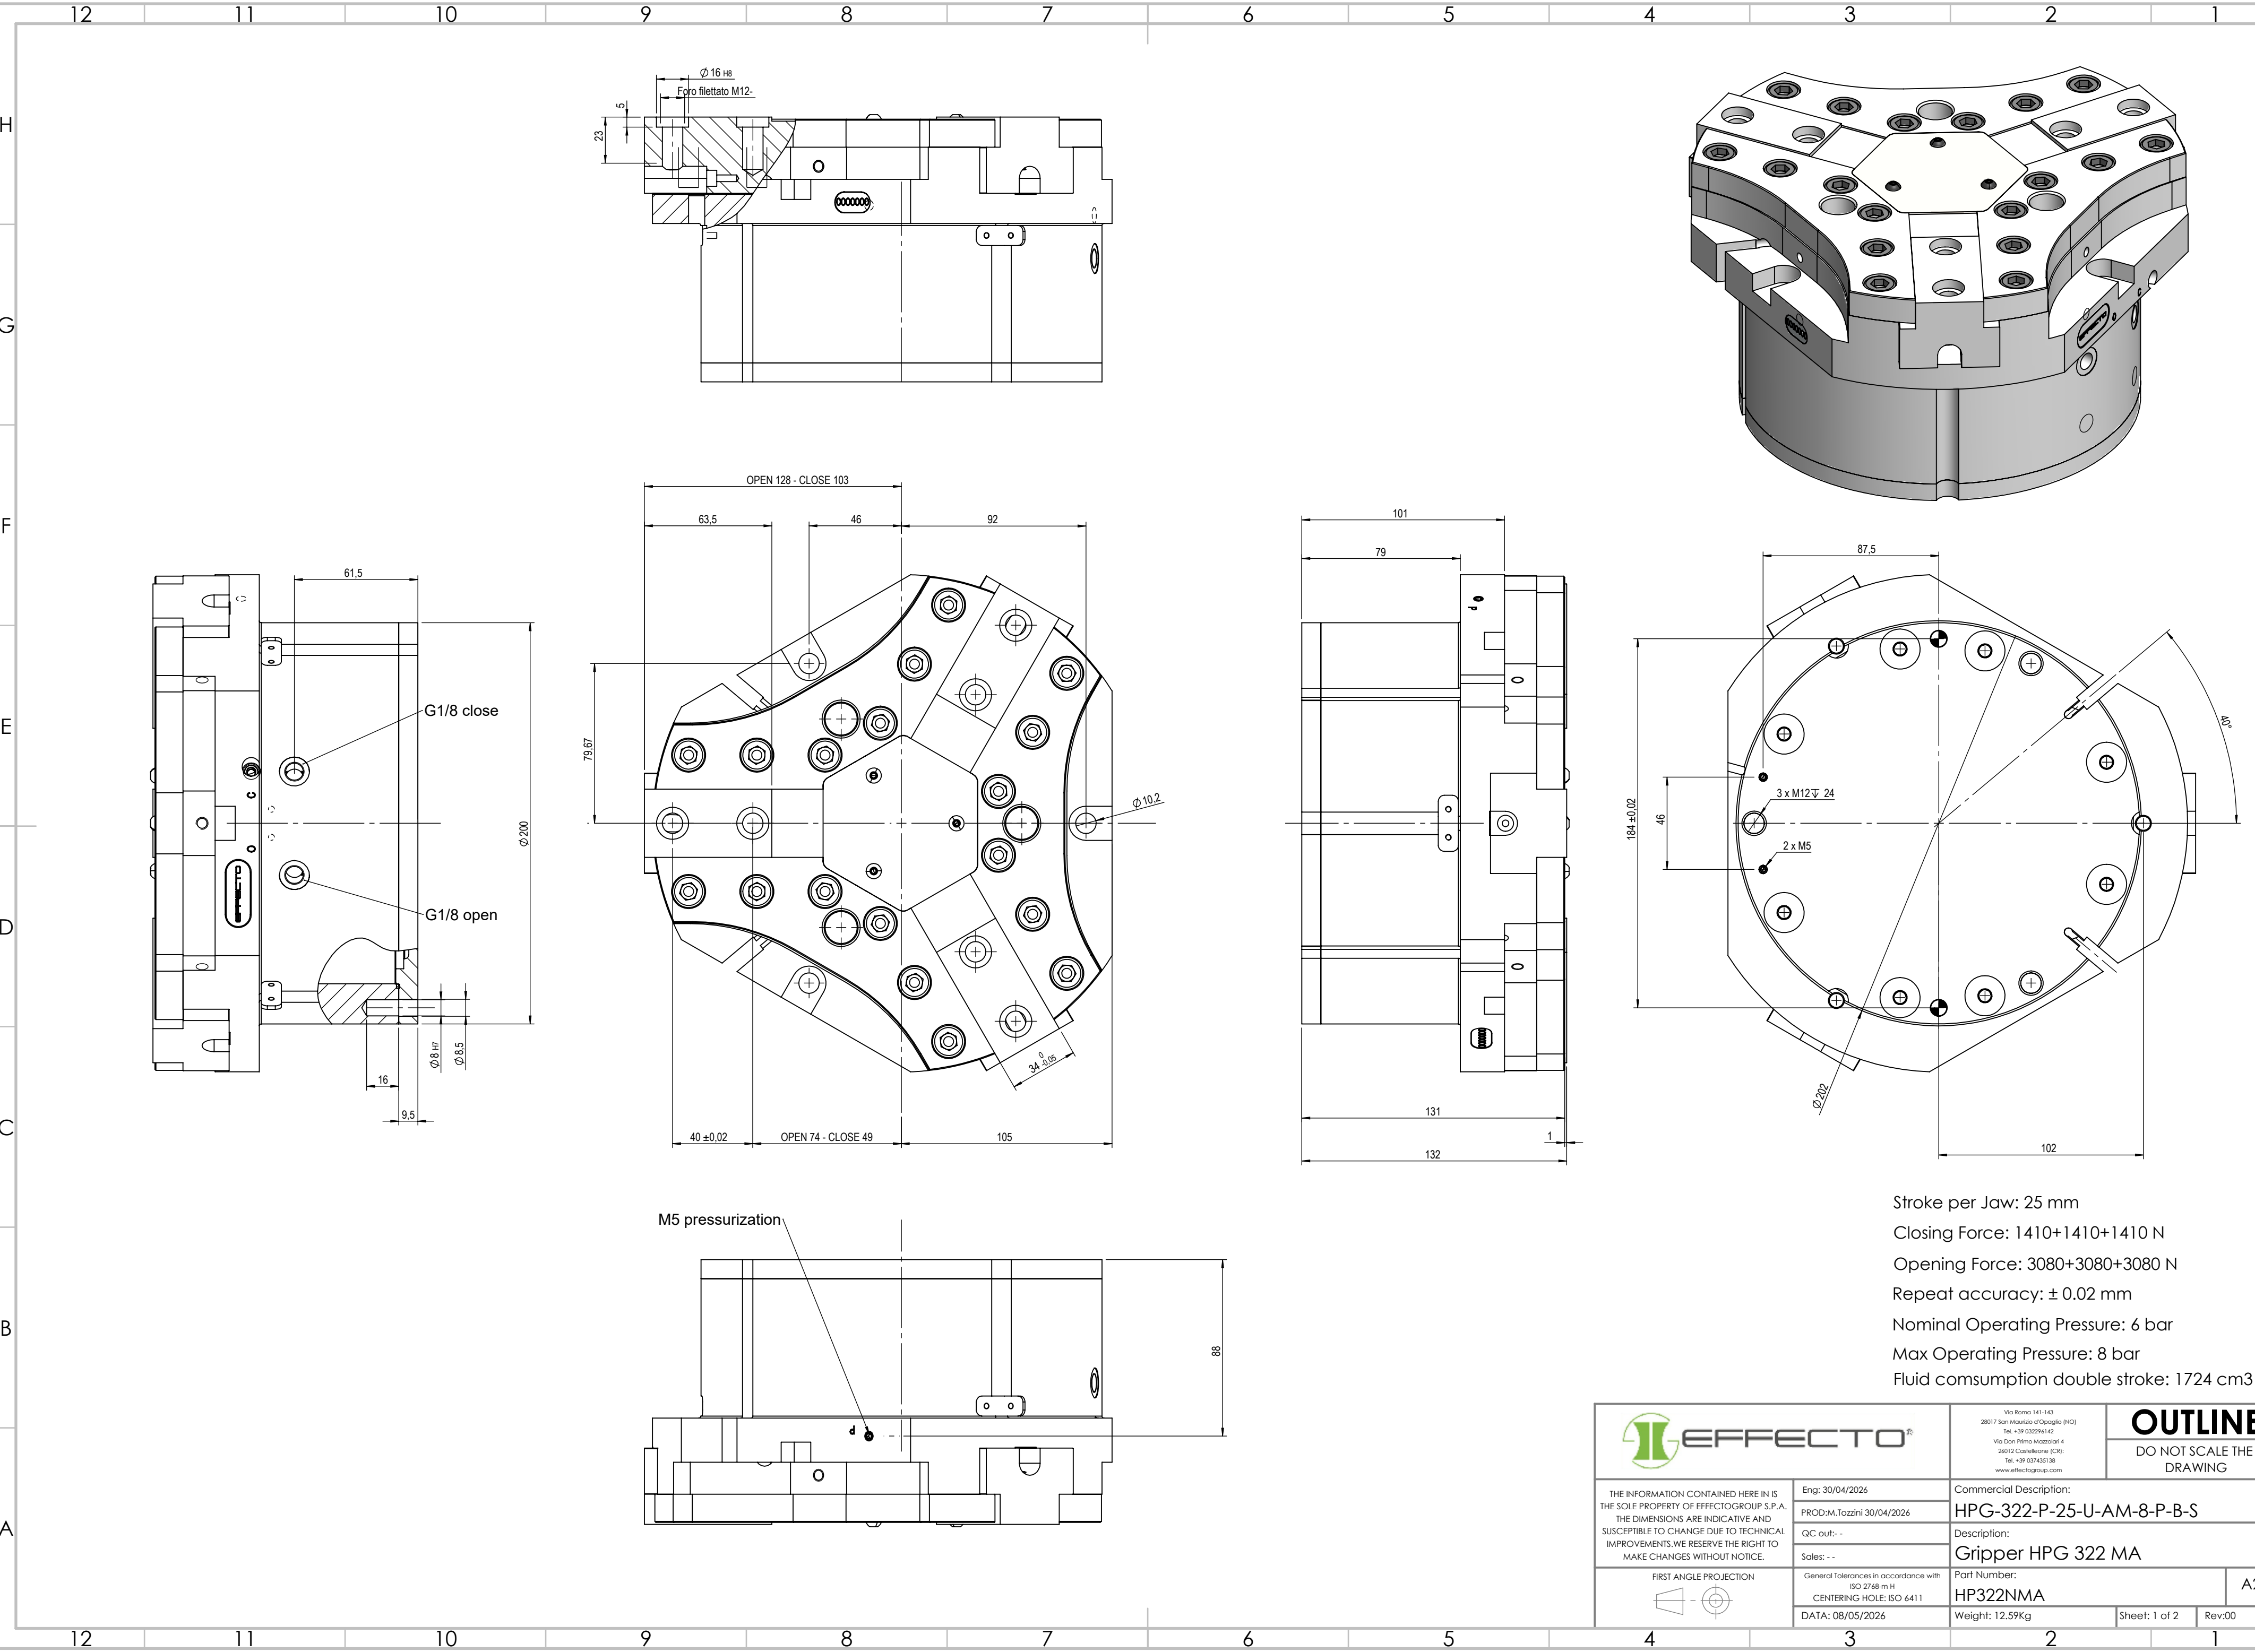

Stroke per Jaw: 25 mm
Closing Force: 1410+1410+1410 N
Opening Force: 3080+3080+3080 N
Repeat accuracy: ± 0.02 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 1724 cm3

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 28012 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 30/04/2026	Commercial Description: HPG-322-P-25-U-AM-8-P-B-S			
	PROD:M.Tozzini 30/04/2026				
	QC out: -	Description: Gripper HPG 322 MA			
	Sales: - -				
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411	Part Number: HP322NMA		A2	
DATA: 08/05/2026	Weight: 12.59Kg	Sheet: 1 of 2			