


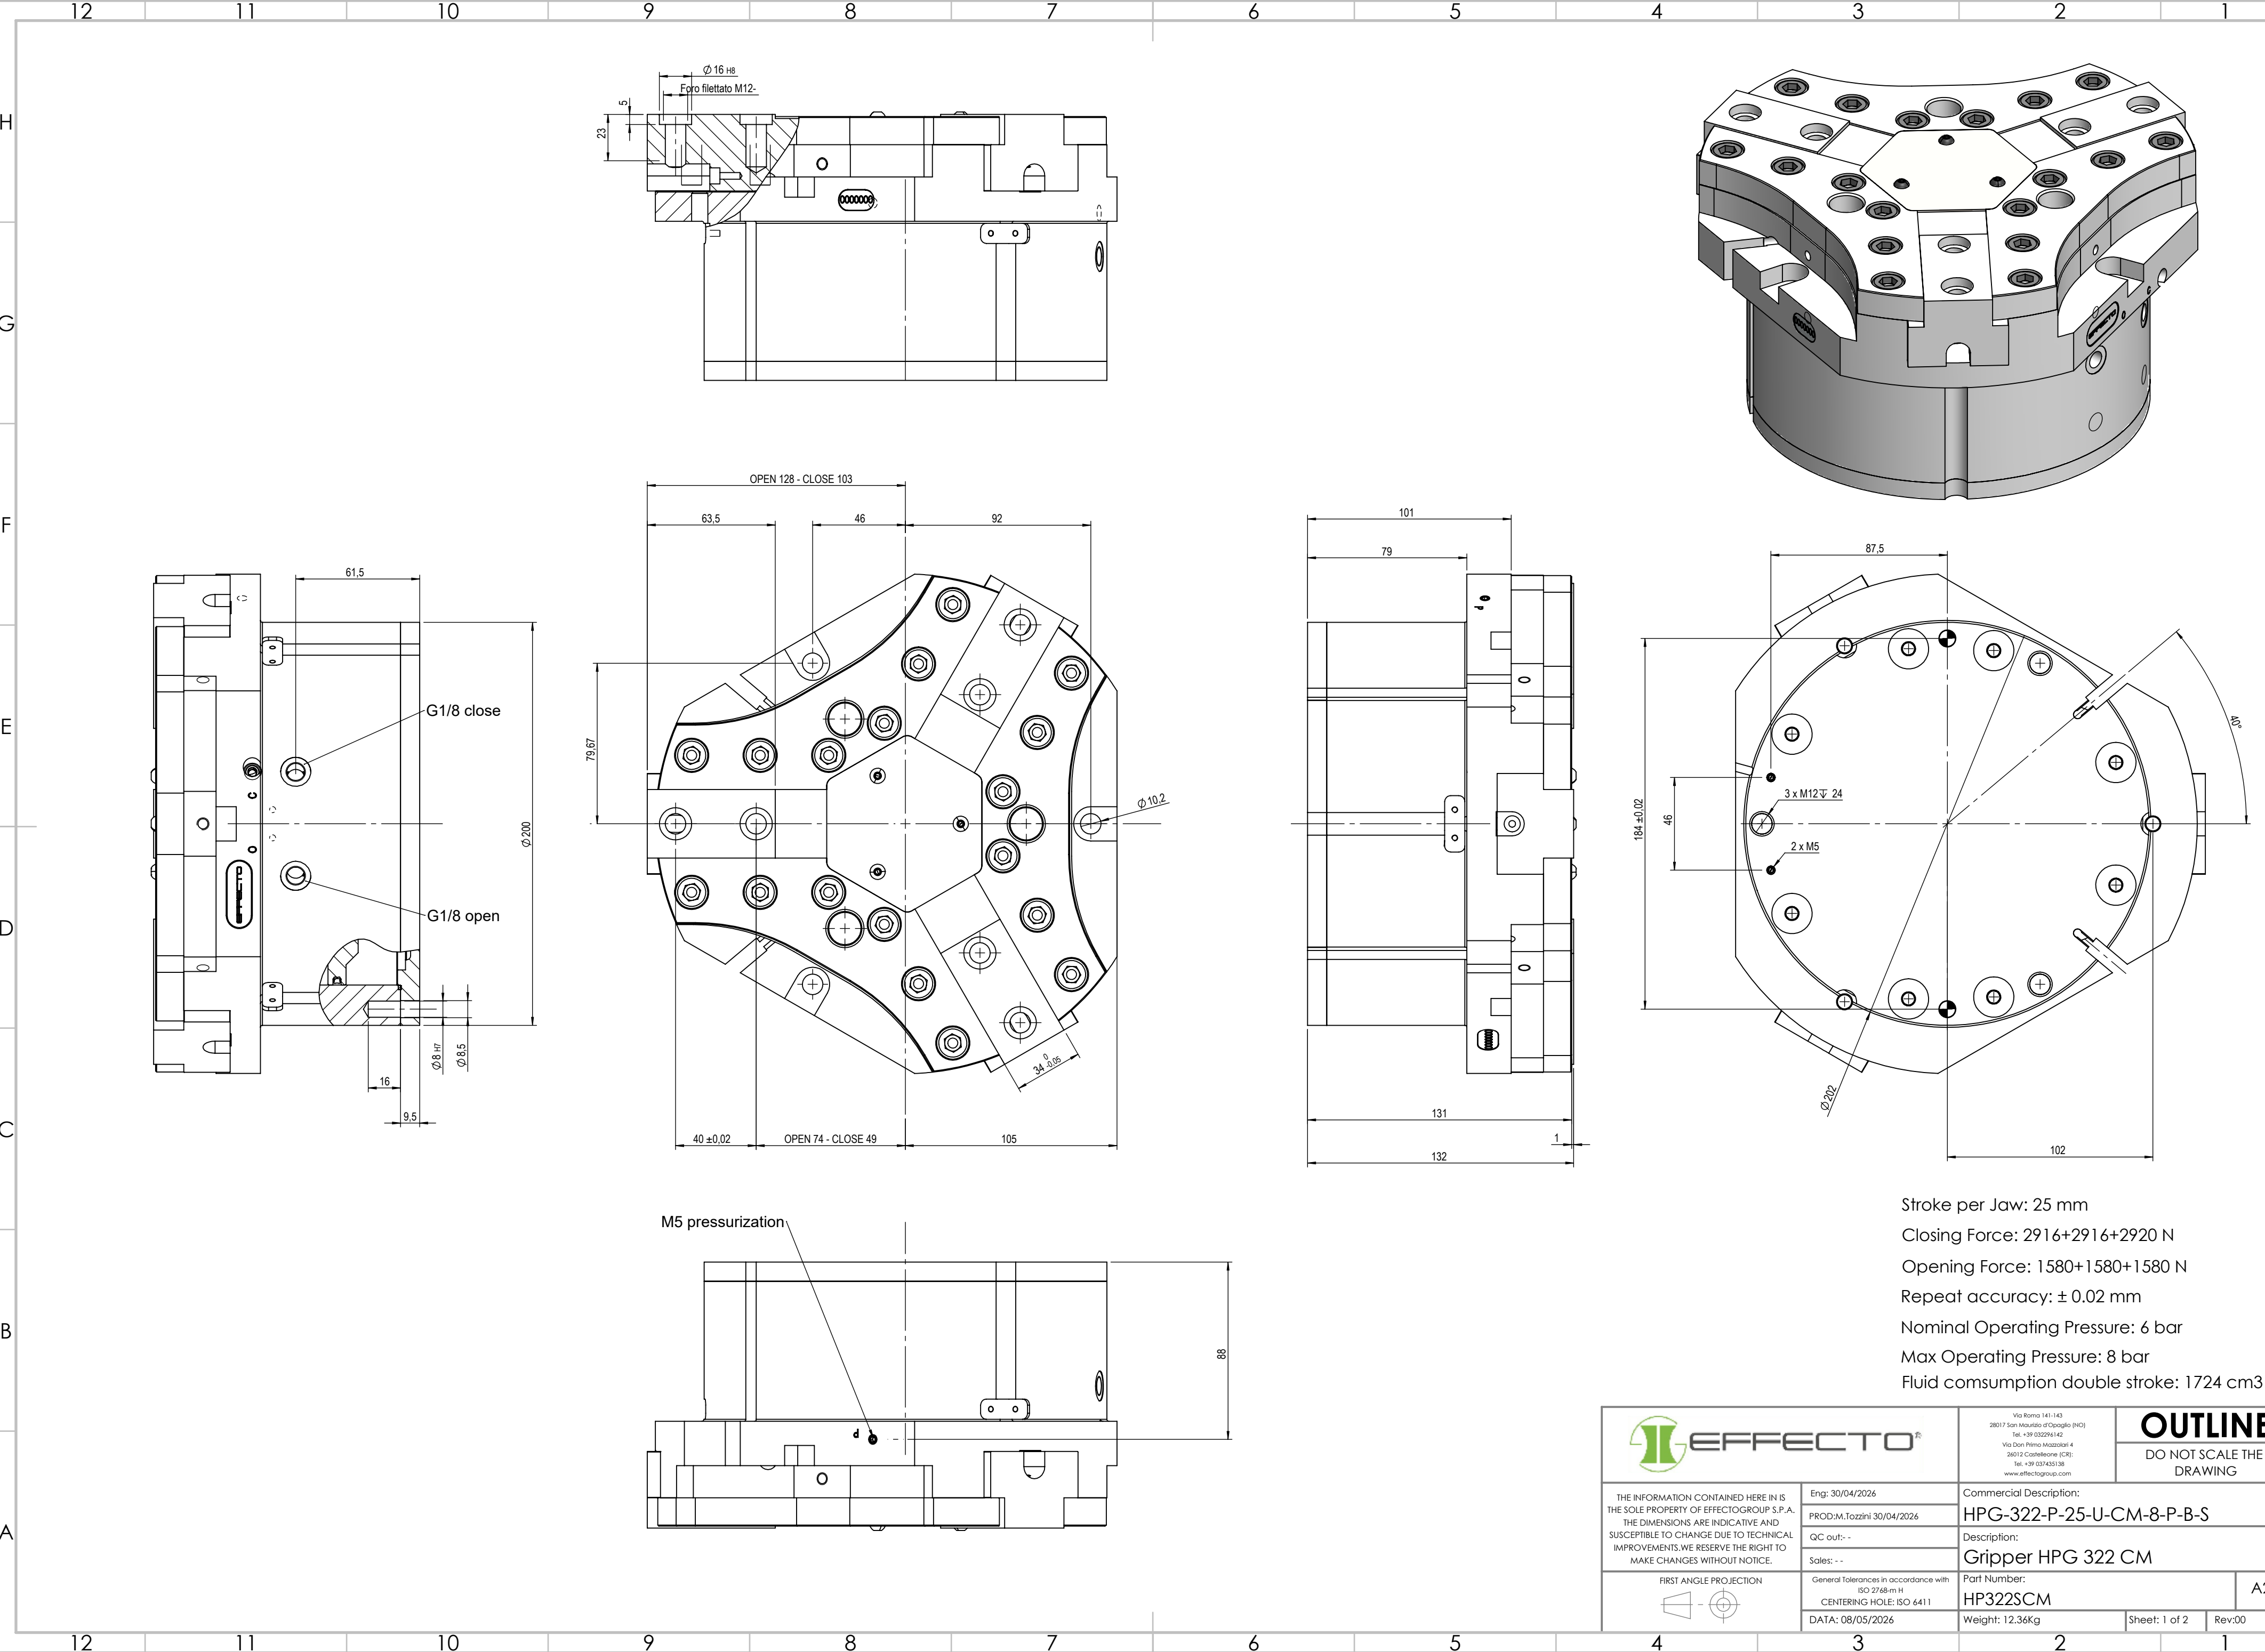

Stroke per Jaw: 25 mm
Closing Force: 2916+2916+2920 N
Opening Force: 1580+1580+1580 N
Repeat accuracy: ± 0.02 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 1724 cm3

		Via Roma 141-143 26017 San Maurizio d'Opoglia (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
		Eng: 30/04/2026 PROD:M.Tozzini 30/04/2026 QC out: - Sales: -		Commercial Description: HPG-322-P-25-U-CM-8-P-B-S Description: Gripper HPG 322 CM	
THE INFORMATION CONTAINED HERE IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number: HP322SCM	
		DATA: 08/05/2026		Weight: 12.36Kg	
FIRST ANGLE PROJECTION 		Sheet: 1 of 2		Rev:00	