


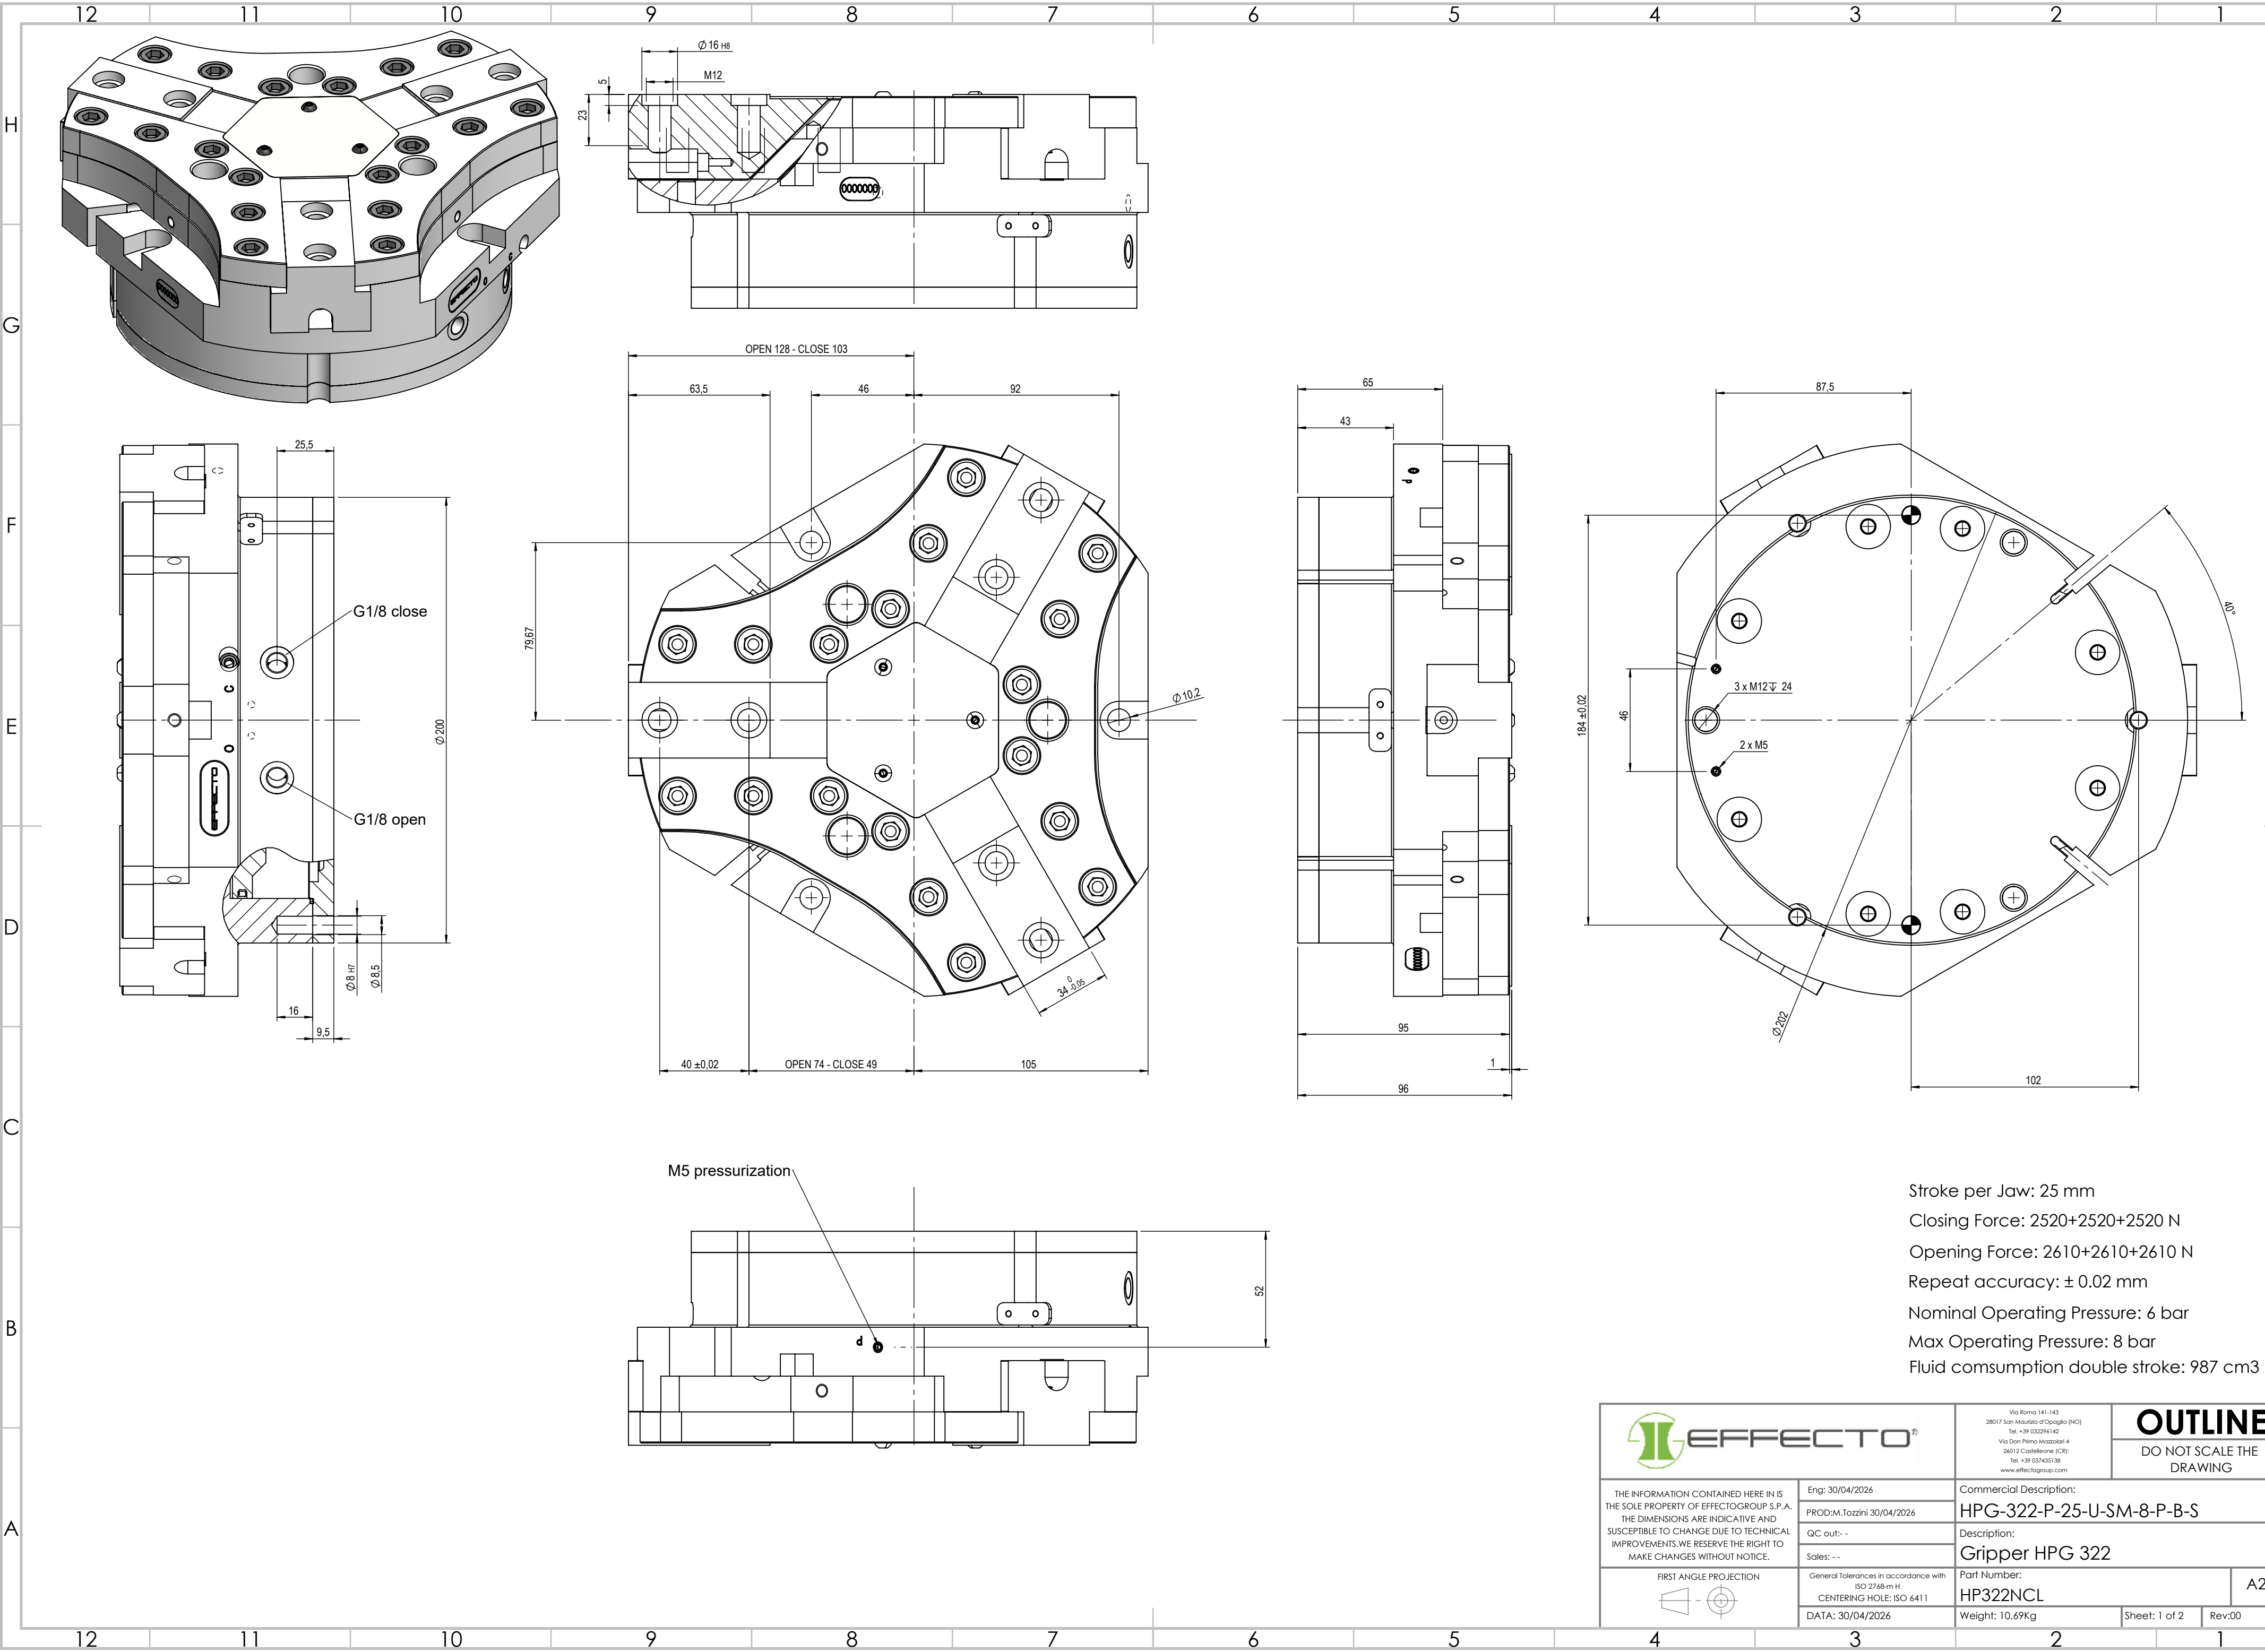

Stroke per Jaw: 25 mm
Closing Force: 2520+2520+2520 N
Opening Force: 2610+2610+2610 N
Repeat accuracy: ± 0.02 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 987 cm3

		Via Roma 141-143 26017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 30/04/2026	Commercial Description:		
	PROD: M. Tozzini 30/04/2026	HPG-322-P-25-U-SM-8-P-B-S		
	QC out: -	Description:		
	Sales: -	Gripper HPG 322		
	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411	Part Number:		A2
		HP322NCL		
	DATA: 30/04/2026	Weight: 10.69Kg	Sheet: 1 of 2	Rev:00