
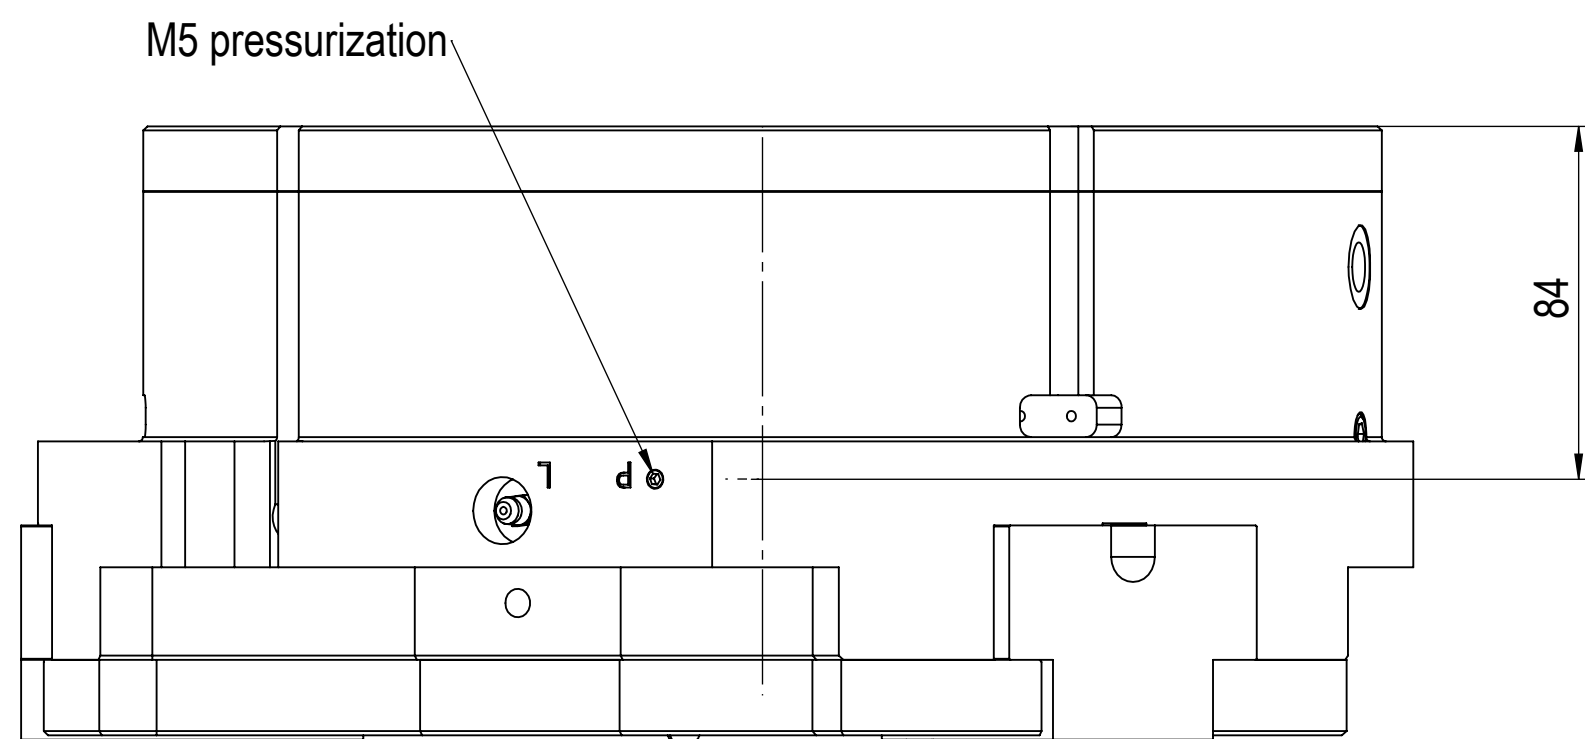
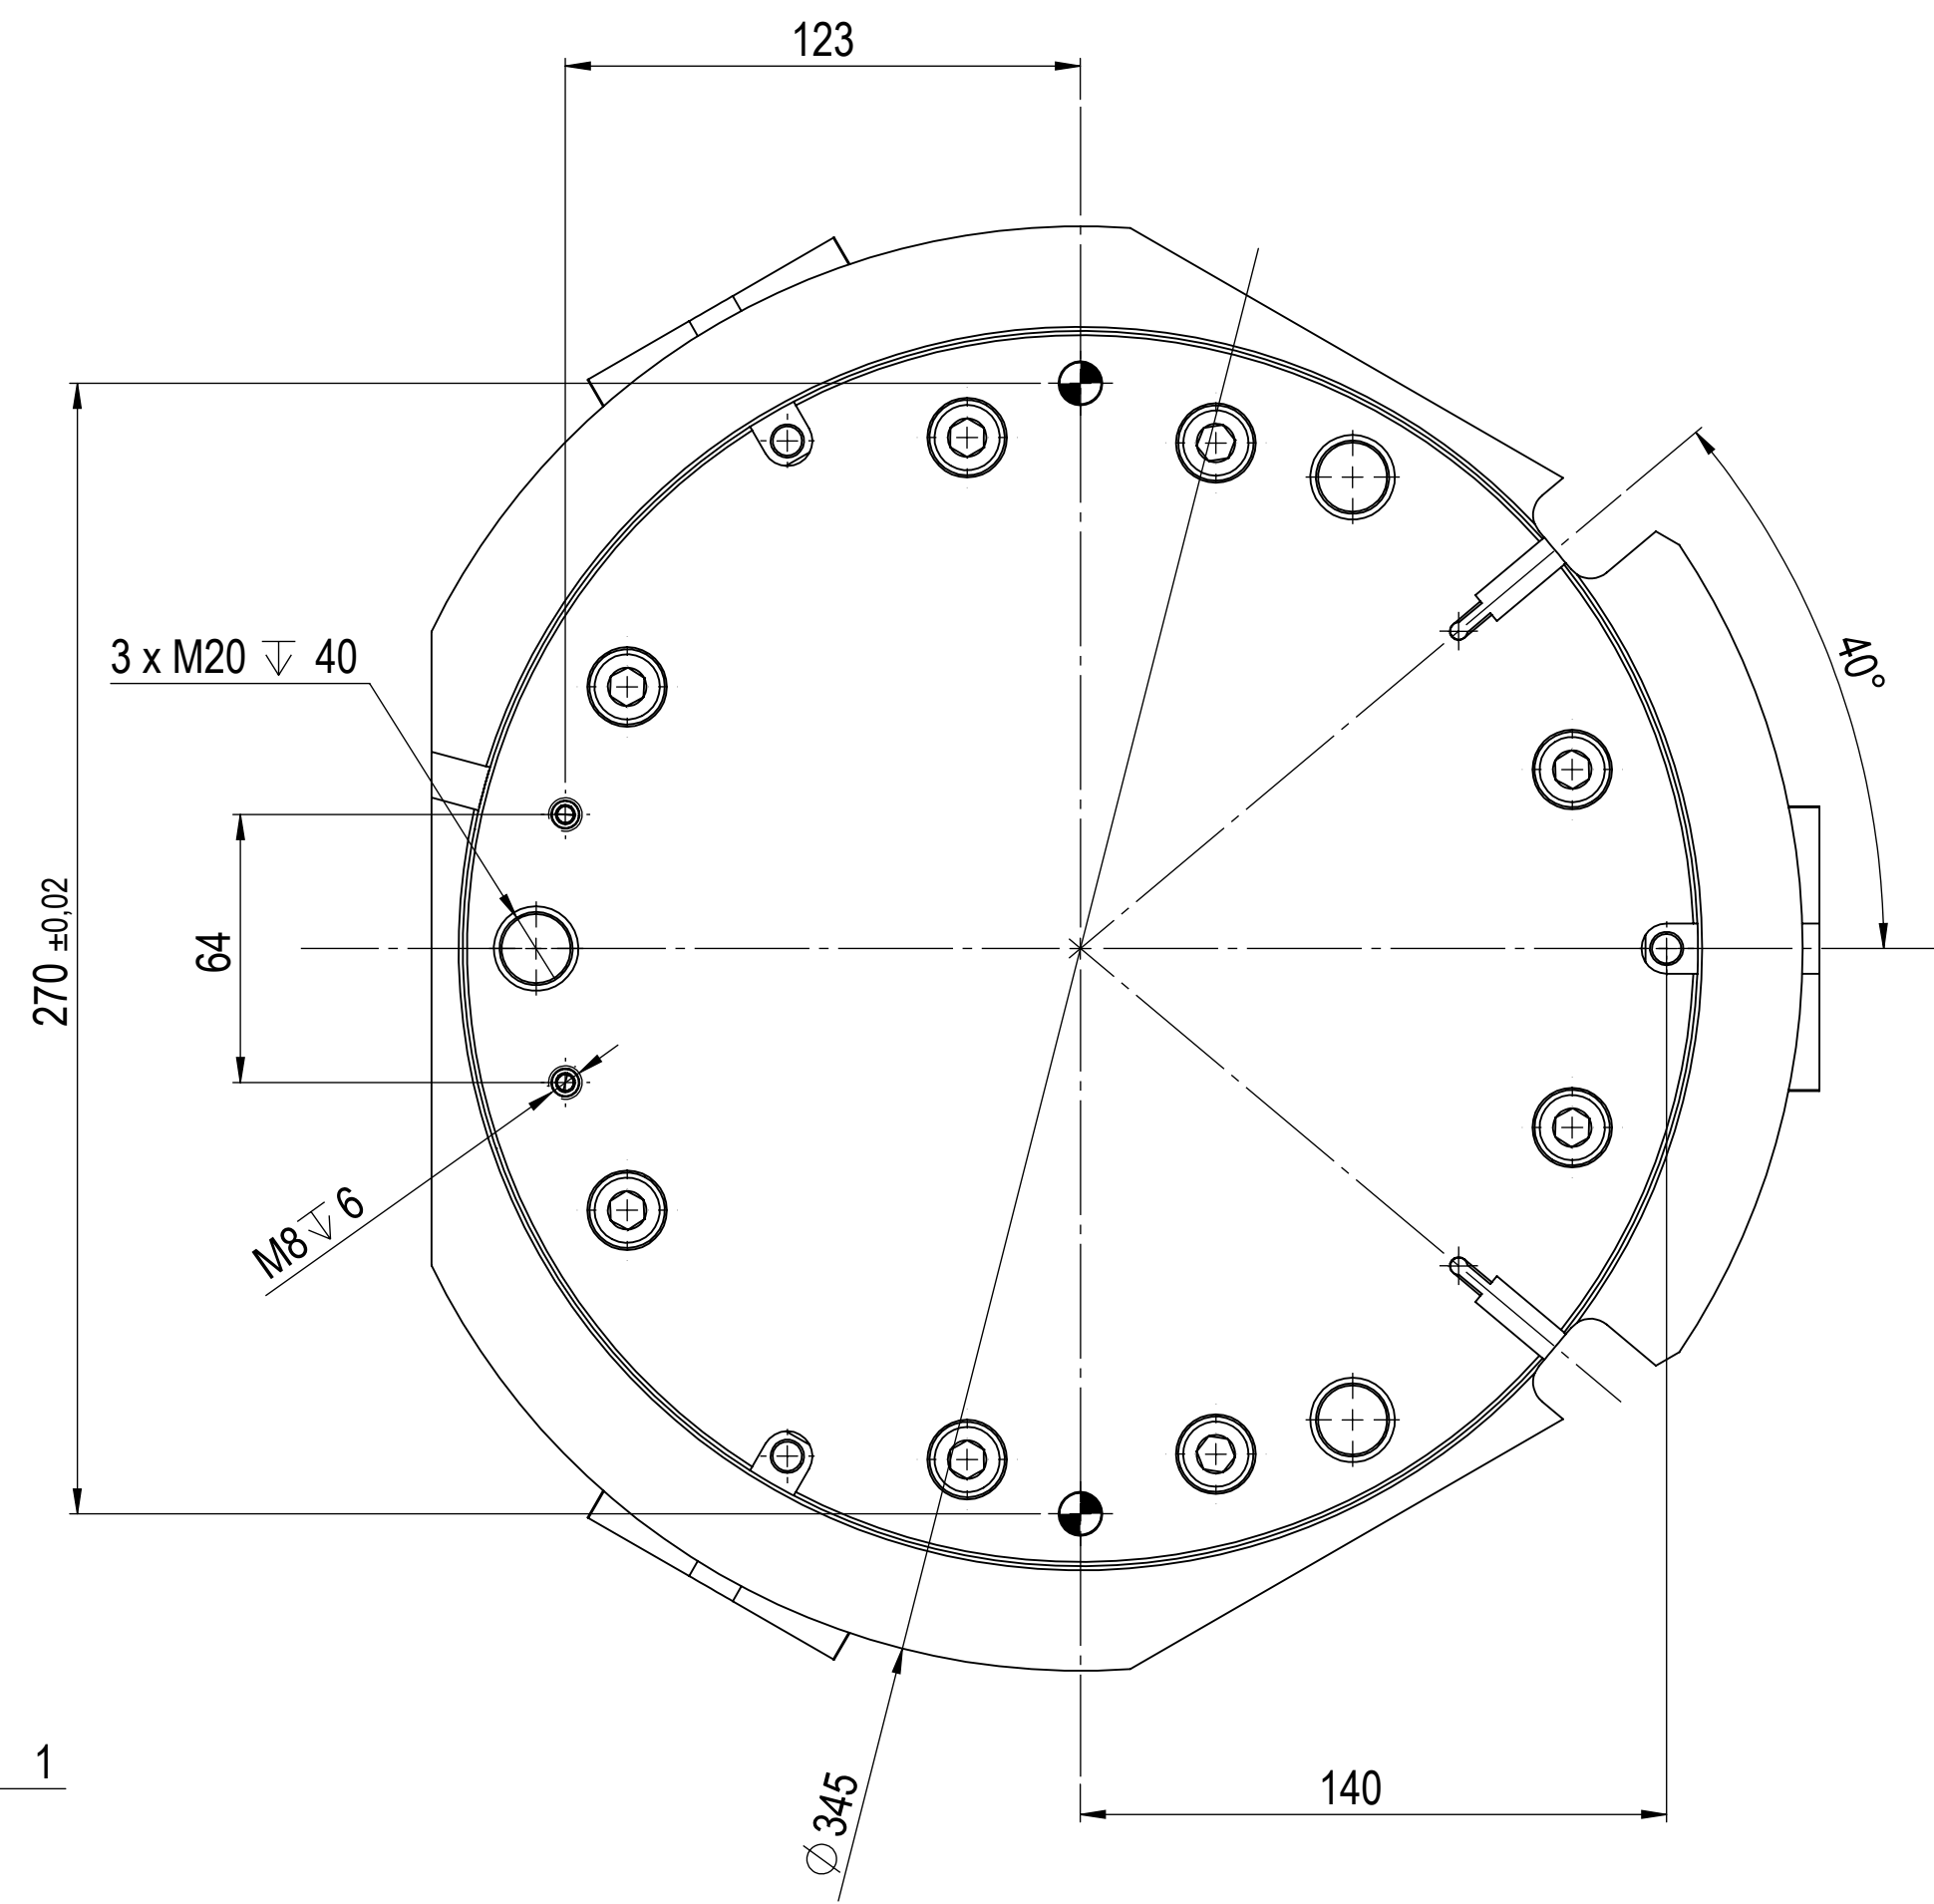
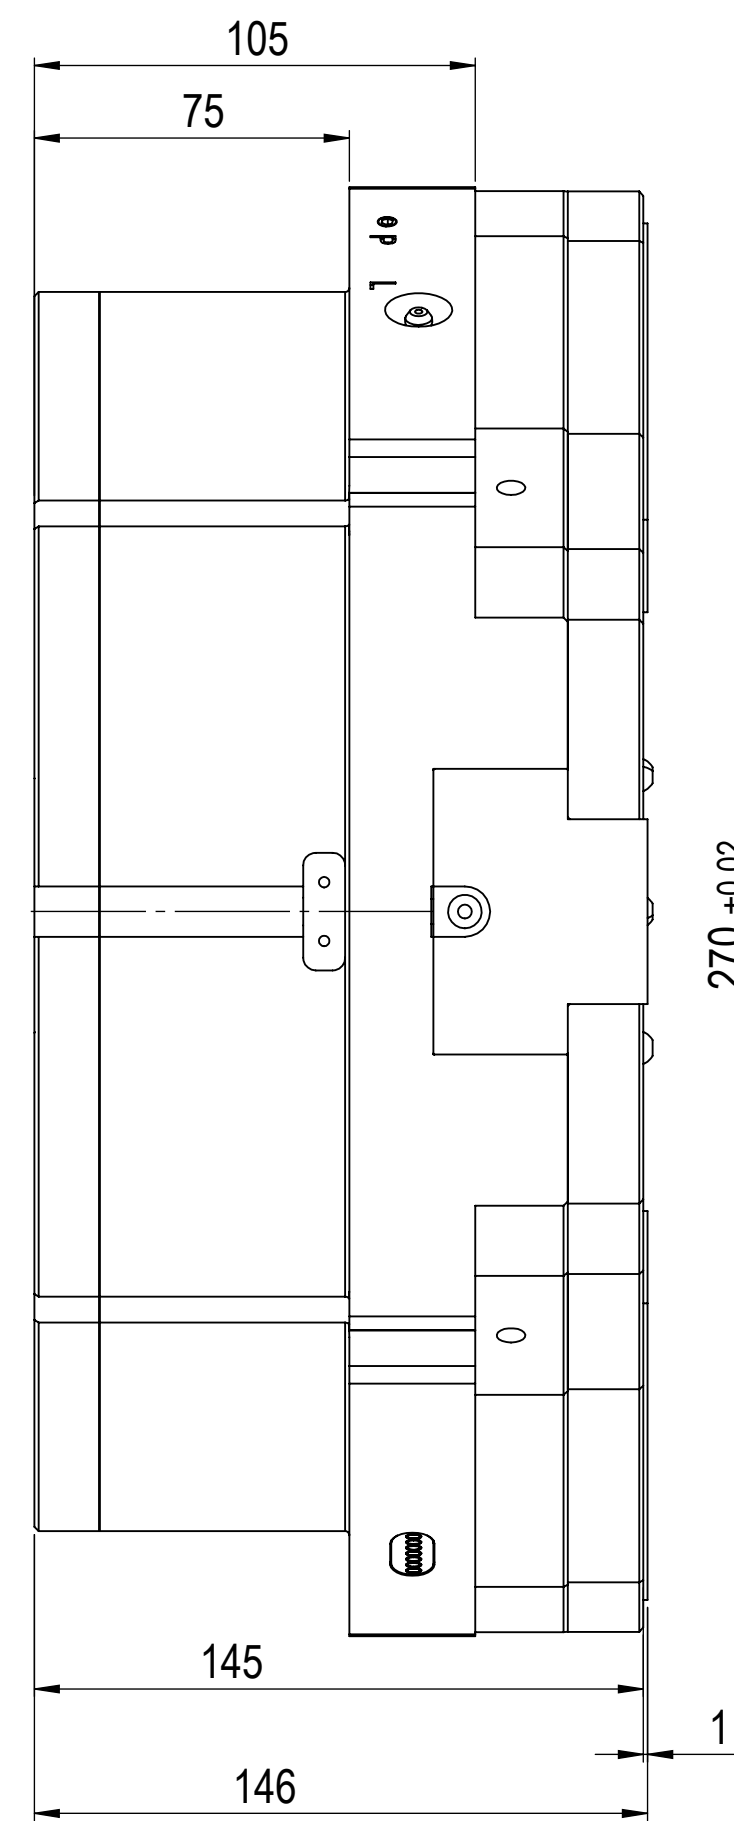
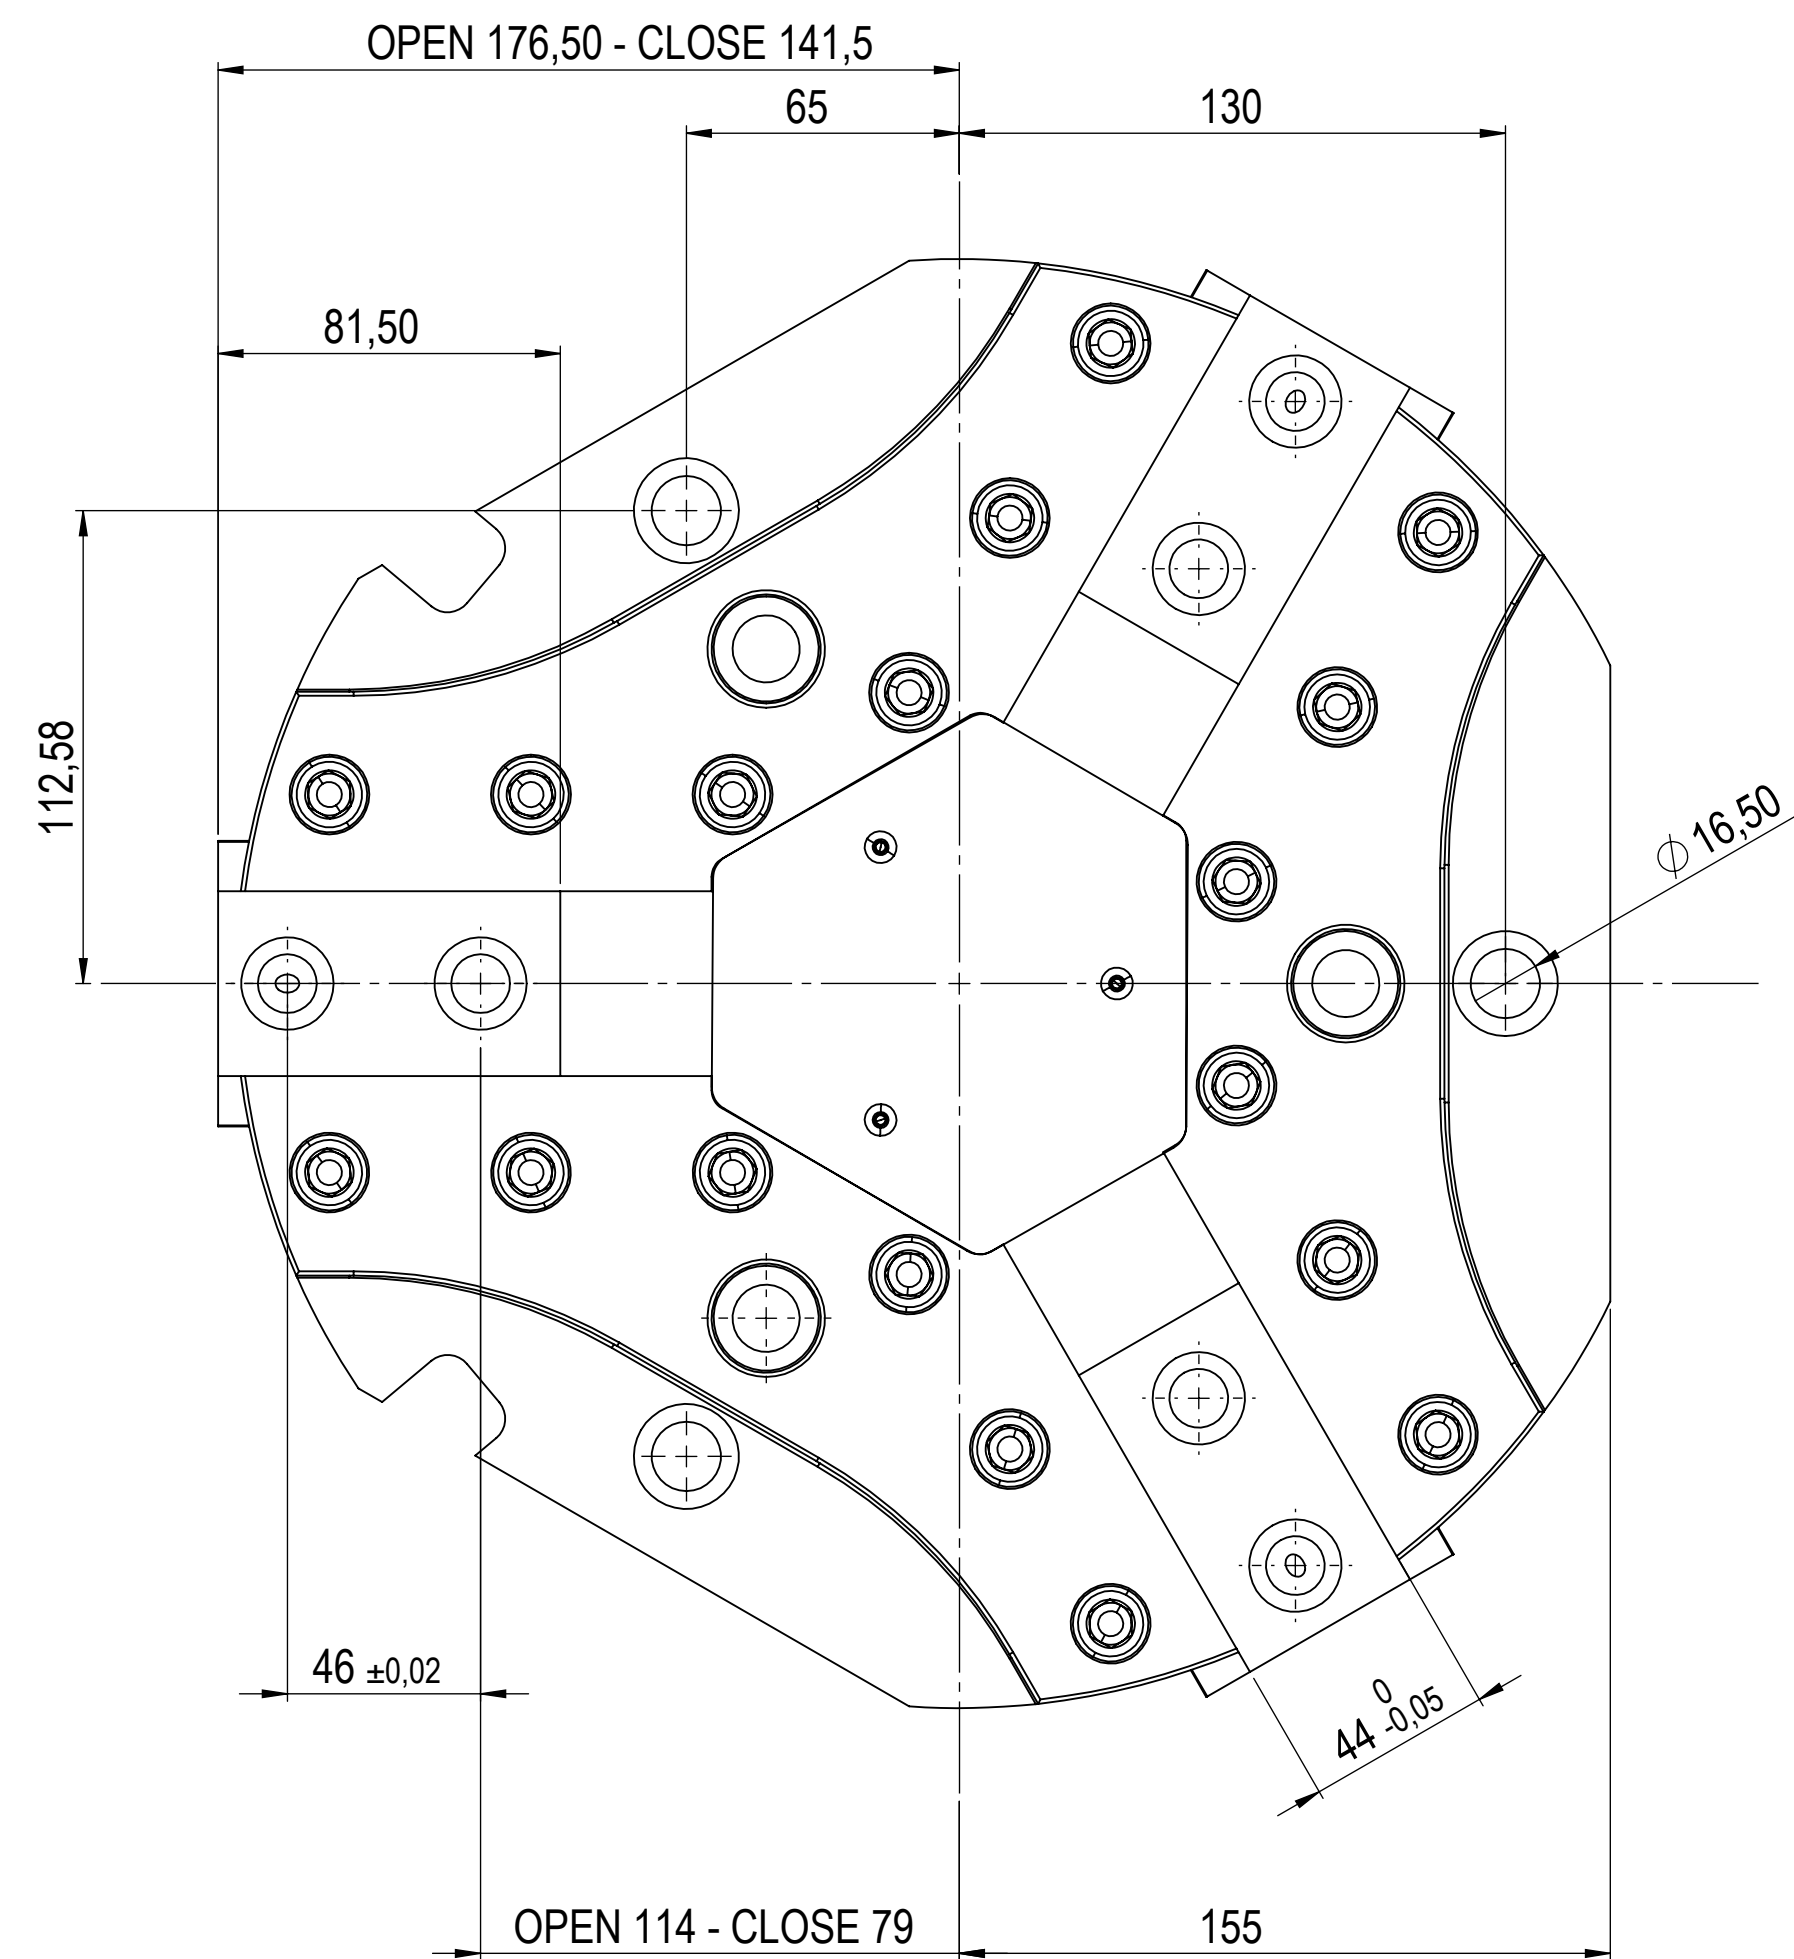
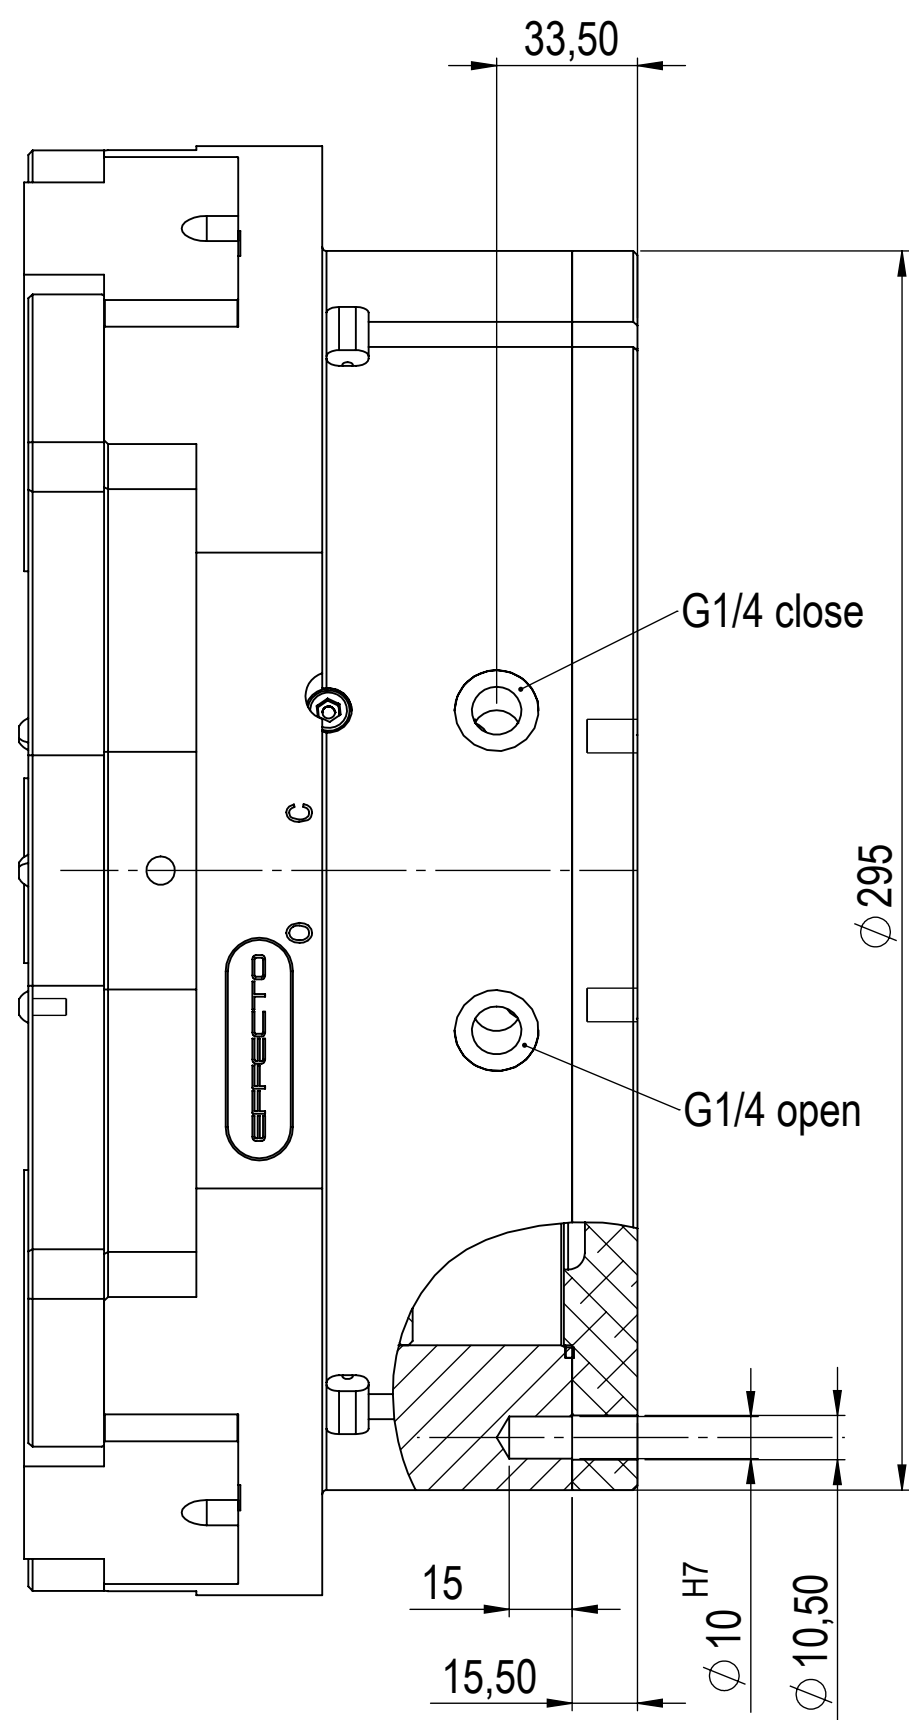
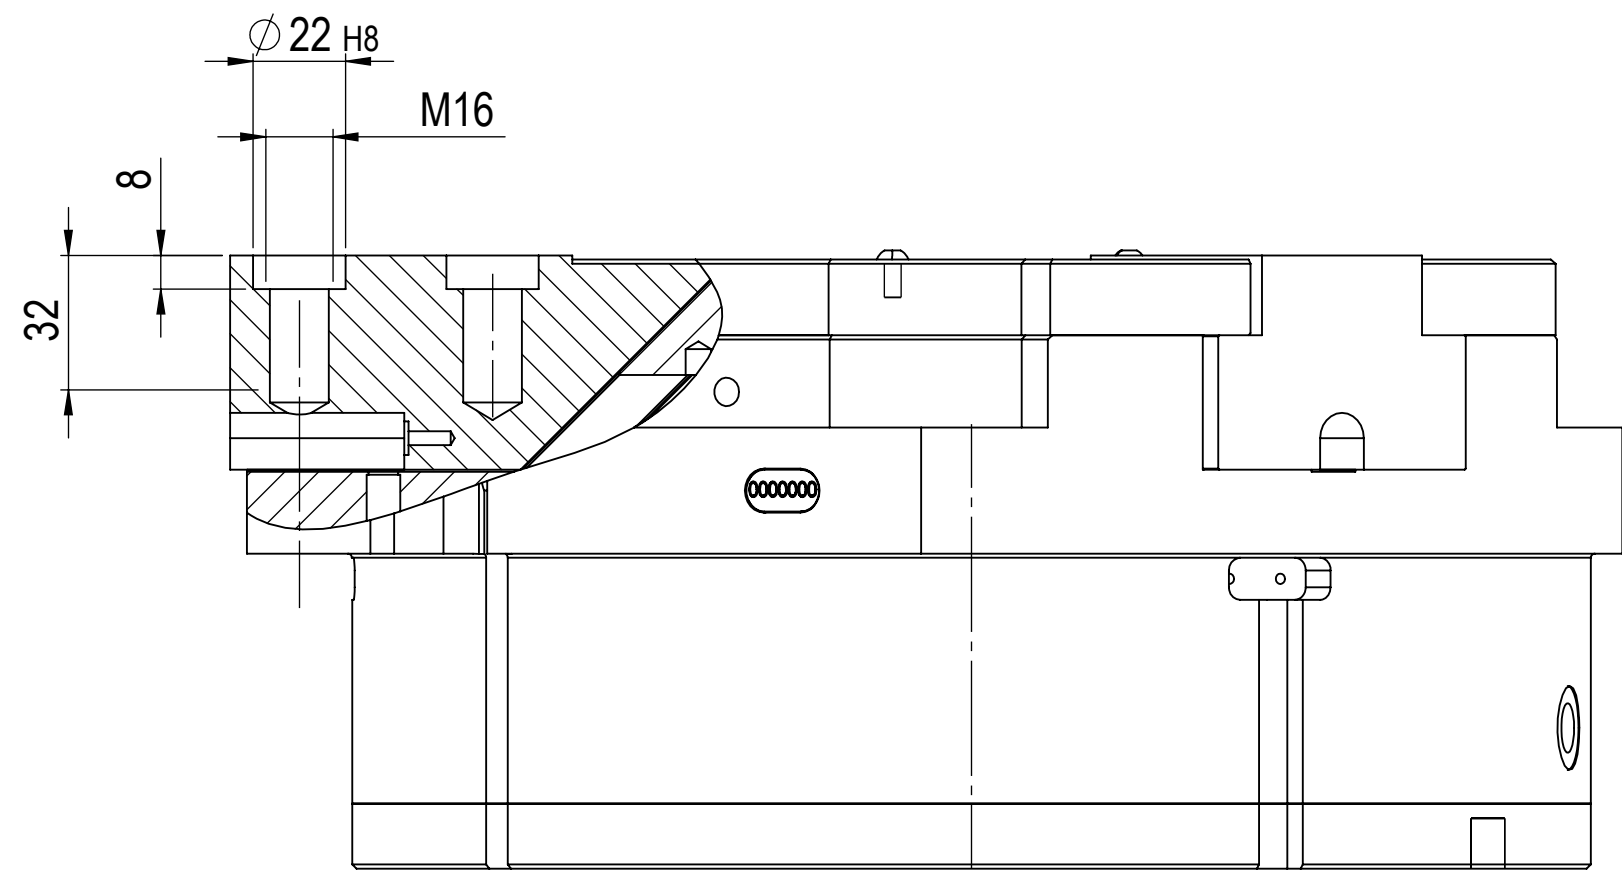


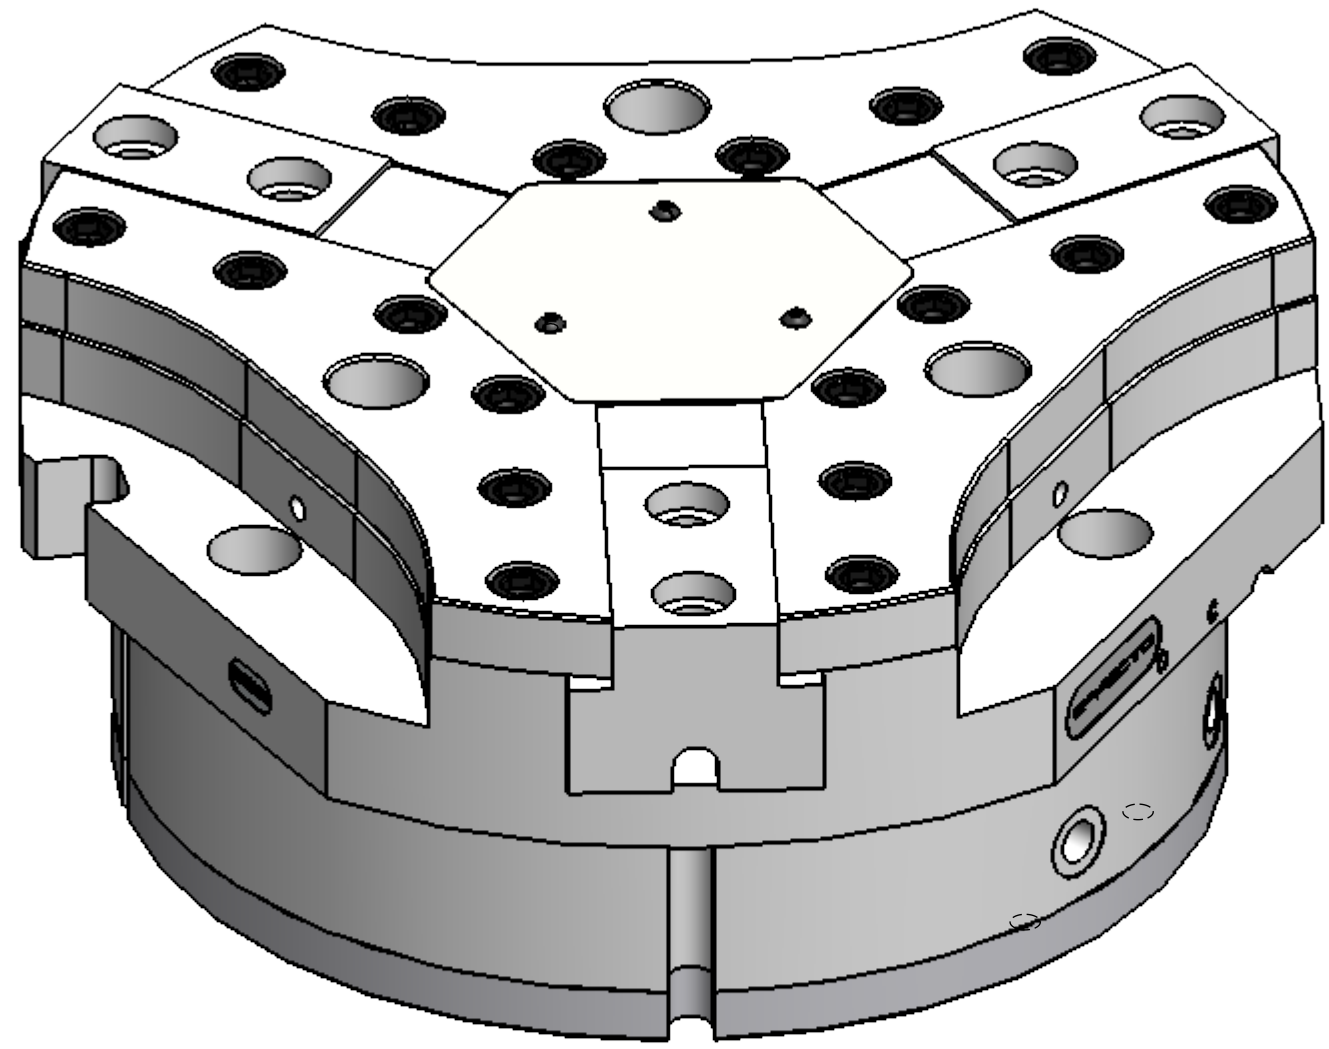

Stroke per Jaw: 35 mm
Closing Force: 5015+5015+5015 N
Opening Force: 5200+5200+5200 N
Repeat accuracy: ± 0.03 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 2753 cm³

			 Via Ruffa 141-143 28017 San Maurizio d'Angelo (VC) Tel. +39 0323 924410 Via Don Piero Mazzoni 4 28012 Castellone (VC) Tel. +39 0323 924418 www.effectorobotics.com	 OUTLINE DO NOT SCALE THE DRAWING
	Eng: 30/04/2026 PROD: M.Tozzi 30/04/2026		Commercial Description: HPG-330-P-35-U-SM-8-P-B-S	
	QC out: - Sales: -		Description: Gripper HPG 330	
	General Tolerances in accordance with ISO 2768-mS CENTERING HOLE: ISO 6411 DATA: 30/04/2026		Part Number: HP330NCL Weight: 32.21Kg	A1
 FIRST ANGLE PROJECTION		Sheet: 1 of 2 Rev:00		