SIZE	DRAWING NUMBER	REV
B	1605-B83A	00

Supply voltage	10 V DC ... 30 V DC
Ripple	≤ 10 % [1]
Voltage drop	< 1.5 V [2]
Current consumption	10 mA [3]
Time delay before availability	≤ 10 ms
Switching frequency	600 Hz
Connection type	Cable, 3-wire, 2 m
Switching output	PNP
Output function	NO
Electrical wiring	DC 3-wire
Continuous current I_a	≤ 100 mA
Cable material	PVC
Conductor size	0.09 mm²

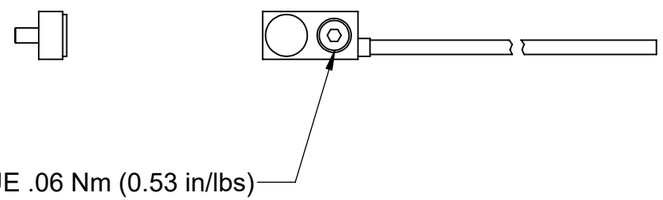





Connection diagram

Cd-001



PRINT DATE
11/12/2024

THIRD ANGLE PROJECTION

THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE. APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HERE IN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.

DIM. AND TOLERANCING IN ACCORDANCE WITH ASMEY 14.5-2009

METRIC

UNLESS OTHERWISE SPECIFIED:

UNTOLERANCED DIMS ARE BASIC

⌓ .25 A B C

⌖ ∅ .25Ⓜ A B C

ALL HOLE DIAMETERS +/- 0.25

INTERNAL RADIIS & BROKEN EDGES TO BE .13-.38

ALL SURFACE FINISHES 1.6Ra

MAT'L:

SURFACE TREATMENT:

DR: J. VALLELUNGA

CHK: SEE REVISION BLOCK

ENG: J. VALLELUNGA

MFG: M. DUDNATH

QC: M. DUDNATH

3D MODEL NAME:
1605-B83A

SCALE: 1:1

DO NOT SCALE DRAWING

ISO 9001
REGISTERED

EFFECTO®
648 Saratoga Rd. Glenville, NY 12302
www.appliedrobotics.com

TITLE:

OUTLINE KIT, TOOL PRESENT PNP E50, E63, PNP E50, E63,E80, E100, E125LP XCHANGE TOOL PRESENT KIT

SIZE	DRAWING NUMBER	REV
B	1605-B83A	00

WEIGHT: 0 kg | RoHs COMPLIANT: YES | SHT. 2 OF 2