

8 7 6 5 4 3 2 1

F







E

D


C

B

A

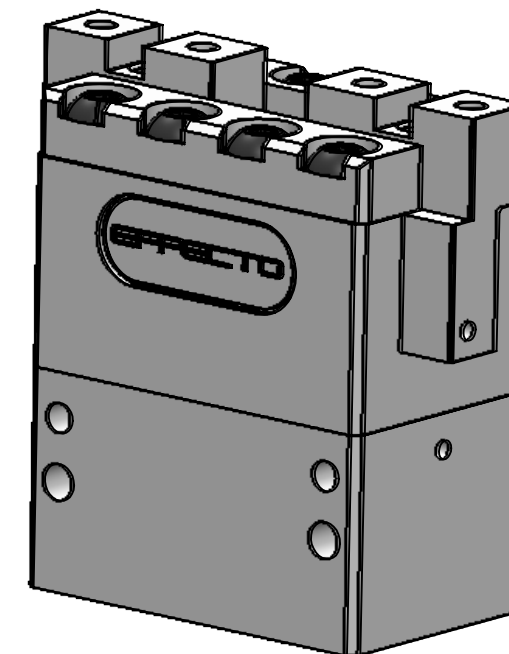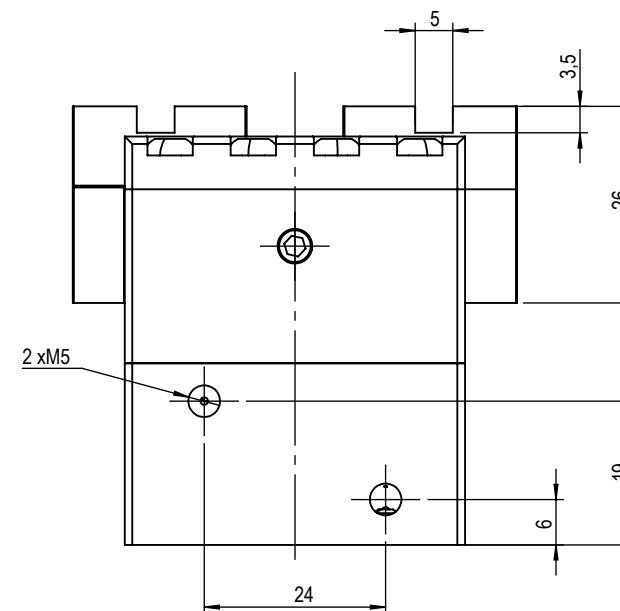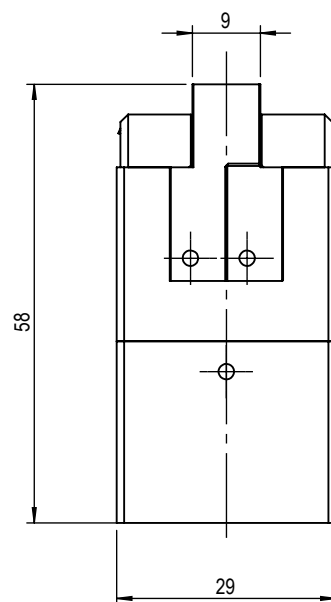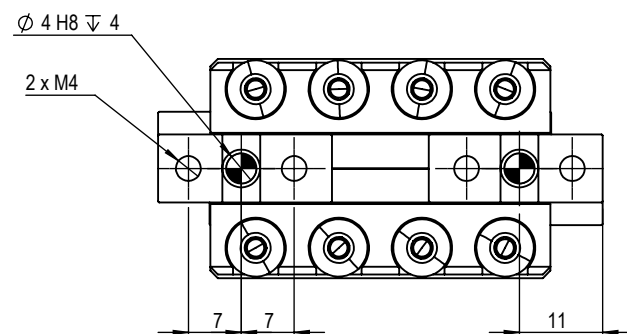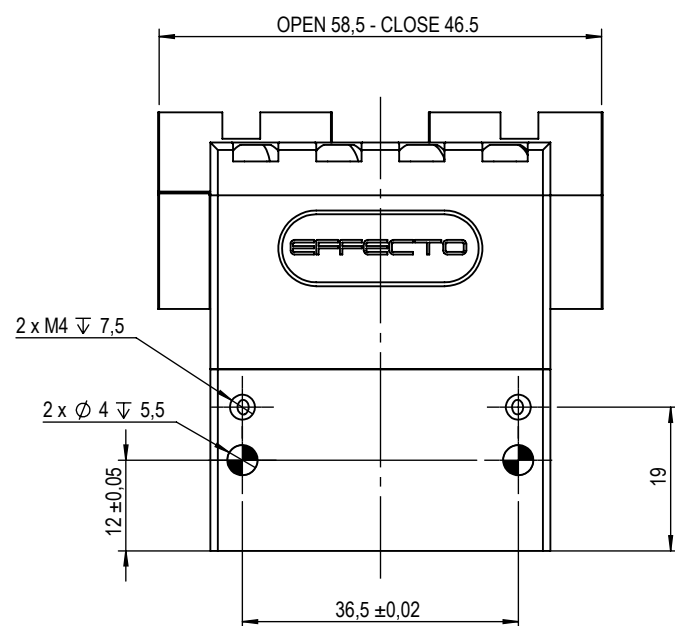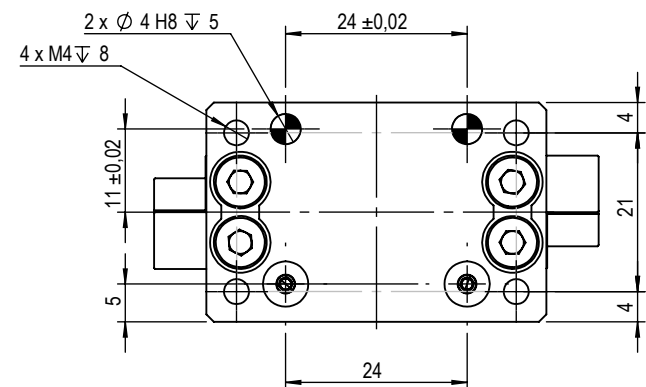

Stroke per Jaw: 6 mm
Closing Force: 104+104 N
Opening Force: 74+74 N
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 6 bar
Fluid consumption double stroke: 5 cm³

 EFFECTO [®]		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 12/05/2026	Commercial Description: LGE-45-P-6-L-SM-6-N-B-N			
	PROD:M.Tozzini 12/05/2026	Description: Gripper LGE45			
	QC out:	Part Number: LG450CGC			
	Sales: - -				
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411	Weight: 0.24Kg		Sheet: 1 of 1	Rev:00
	DATA: 12/05/2026	A3			

8 7 6 5 4 3 2 1

F

E

D

C

B

A