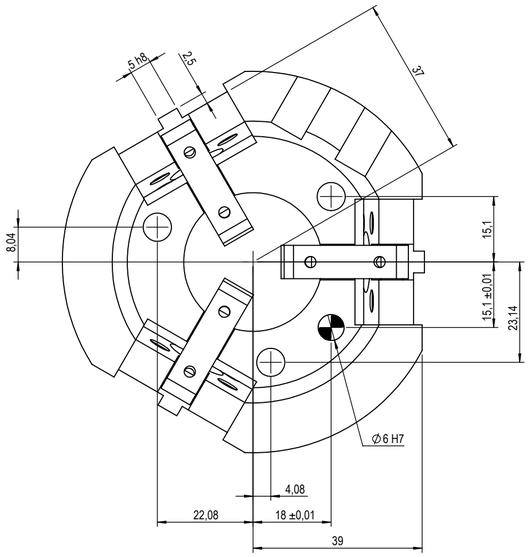

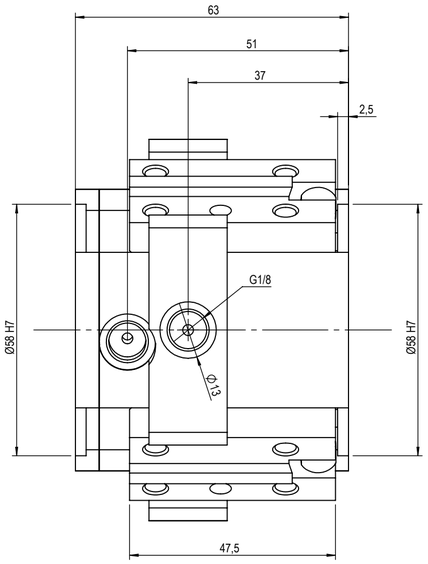

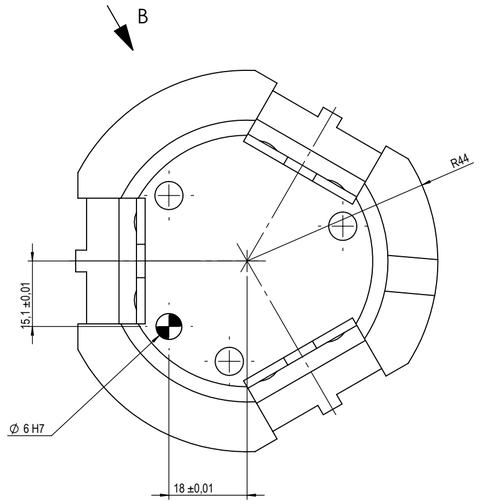

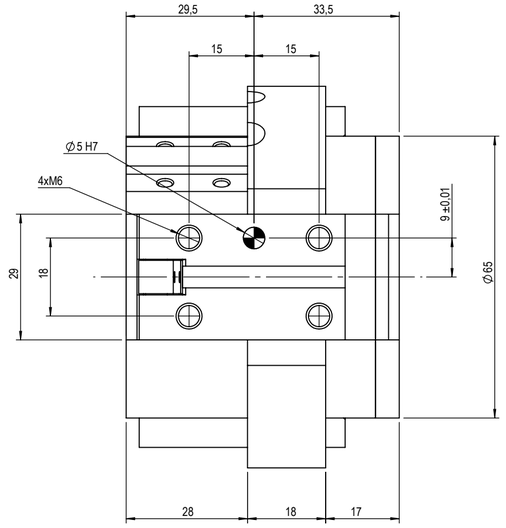

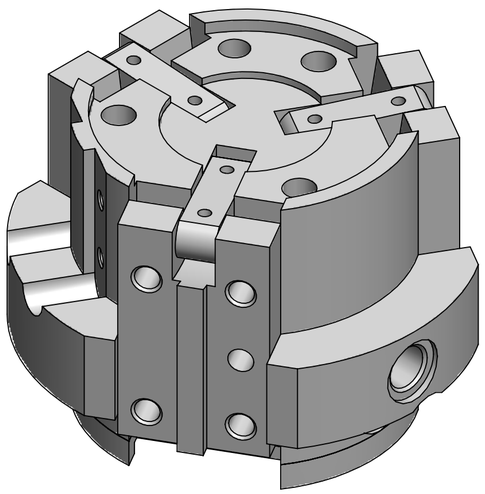

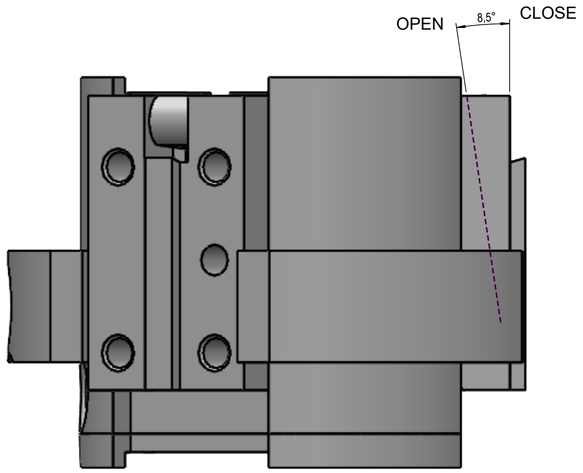

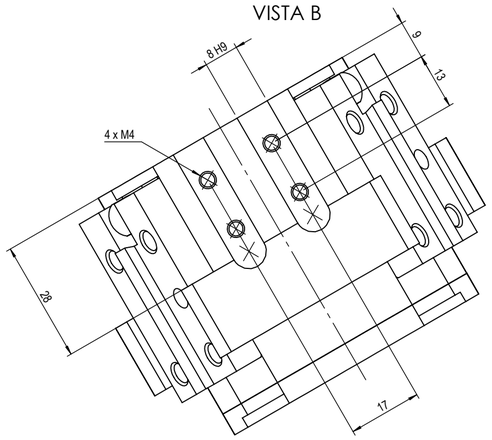

Stroke per Jaw: 7.5°

Closing Moment: 30+30+30 Nm

Repeat accuracy: ± 0.05 mm

Nominal Operating Pressure: 6 bar

Max Operating Pressure: 8 bar

Fluid comsumption double stroke: 19 cm3

EFFECTO

Via Roma 141-143
28017 San Maurizio d'Opaglio (NO)
Tel. +39 0322916142
Via Don Primo Mazzolari 4
26012 Castelleone (CR):
Tel. +39 0374351138
www.effectogroup.com

OUTLINE

DO NOT SCALE THE DRAWING

THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTOGROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.

Eng:- -

PROD:- -

QC out:- -

Sales: - -

FIRST ANGLE PROJECTION

General Tolerances in accordance with ISO 2768-m H
CENTERING HOLE: ISO 6411

DATA: 10/09/2025

Commercial Description:
OG-550-P-7.5-L-SM-8-N-B-S

Description:
Gripper OG550-3

Part Number:
OP755GTE

A2

Weight: 0.9Kg

Sheet: 1 of 1

Rev:00