
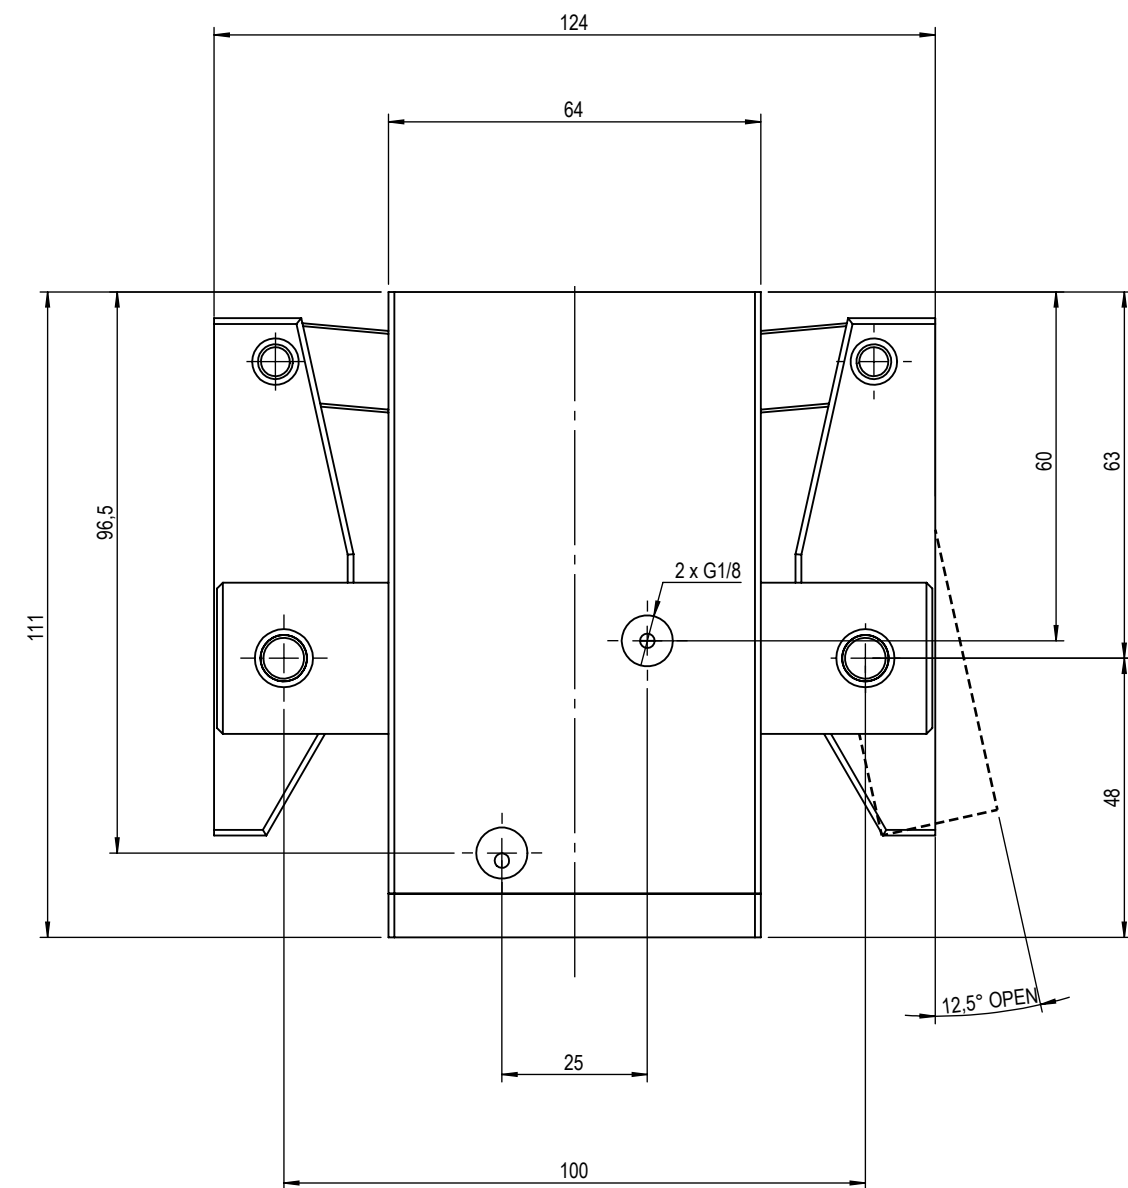
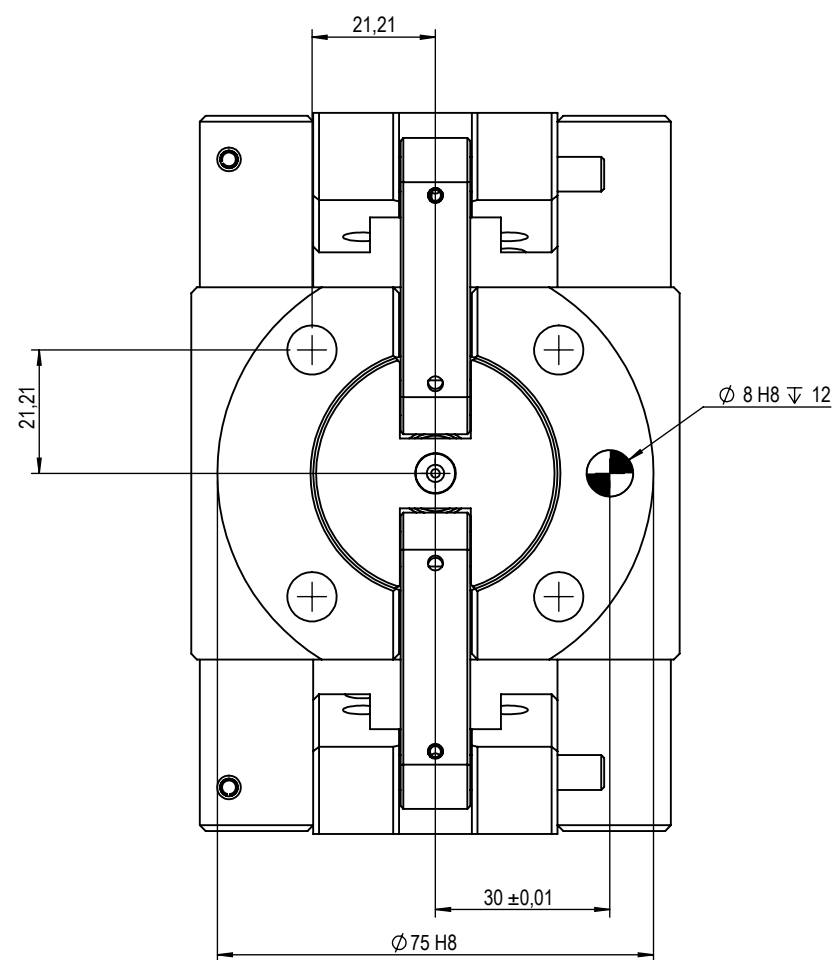
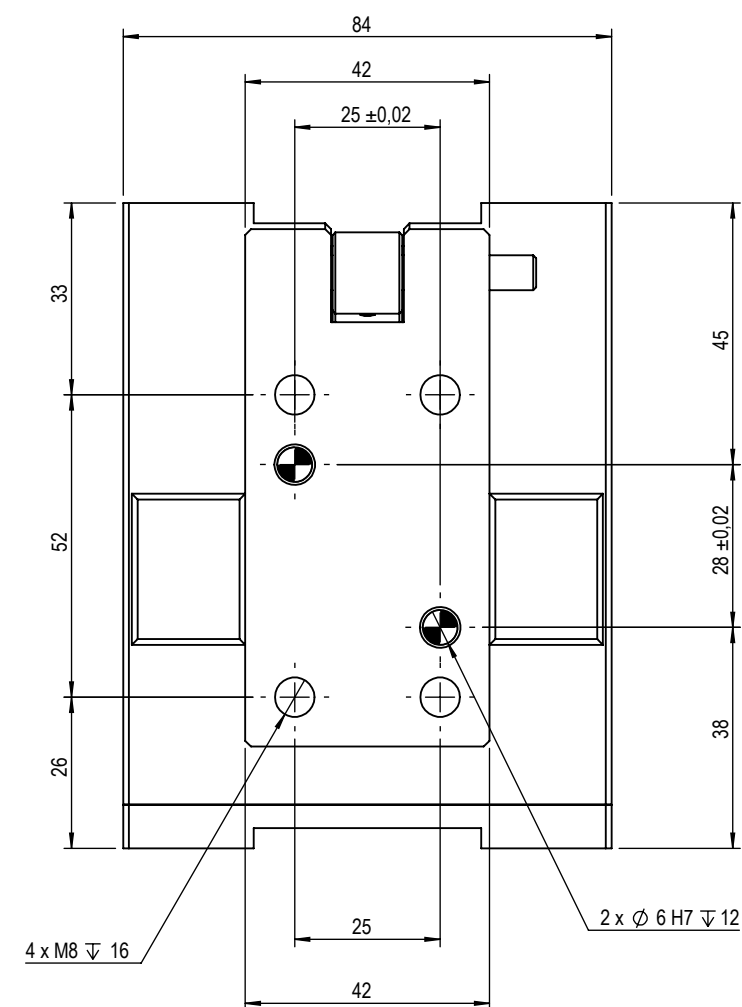
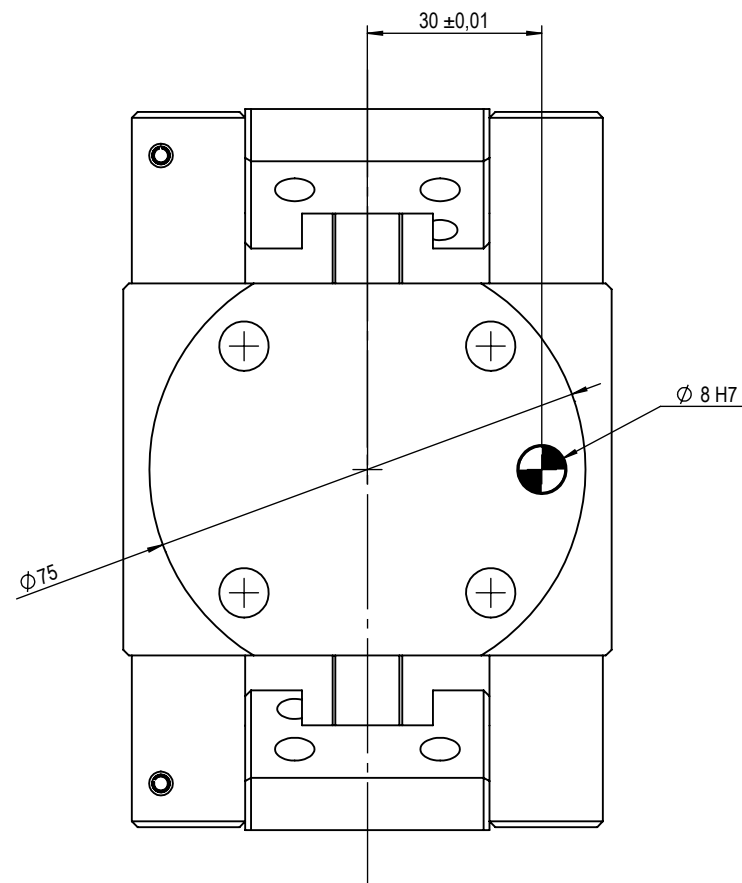
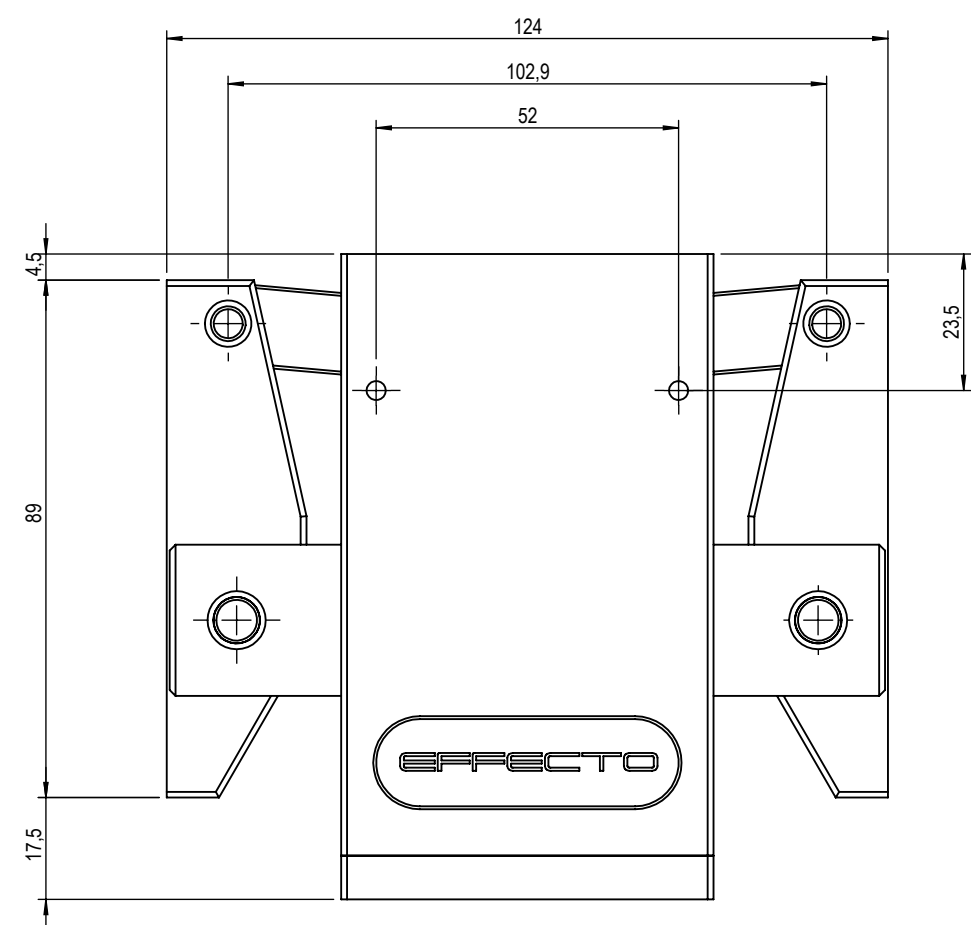


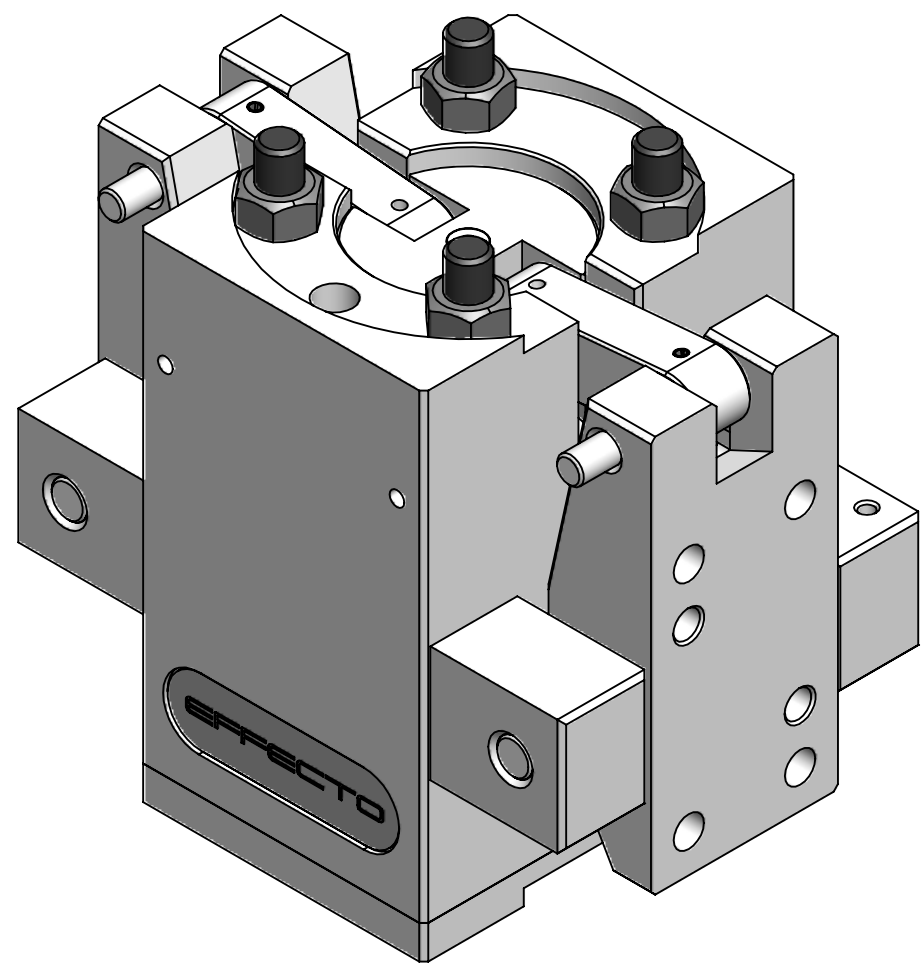

Stroke per Jaw: 12.5°
Closing Force: 105+105 Nm
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 8 bar
Fluid consumption double stroke: 65 cm³

 EFFECTO®	Via Roma 141-143 26017 San Maurizio d'Oropaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING		
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: -	Commercial Description:			
	PROD: - -	OG-570-P-12.5-L-SM-8-N-B-S			
	QC out: -	Description:			
	Sales: - -	OG57012,5° Gripper			
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number: OP610GBE		A2
	DATA: 28/08/2025		Weight: 2753.79Kg		
			Sheet: 2 of 2		Rev:01