


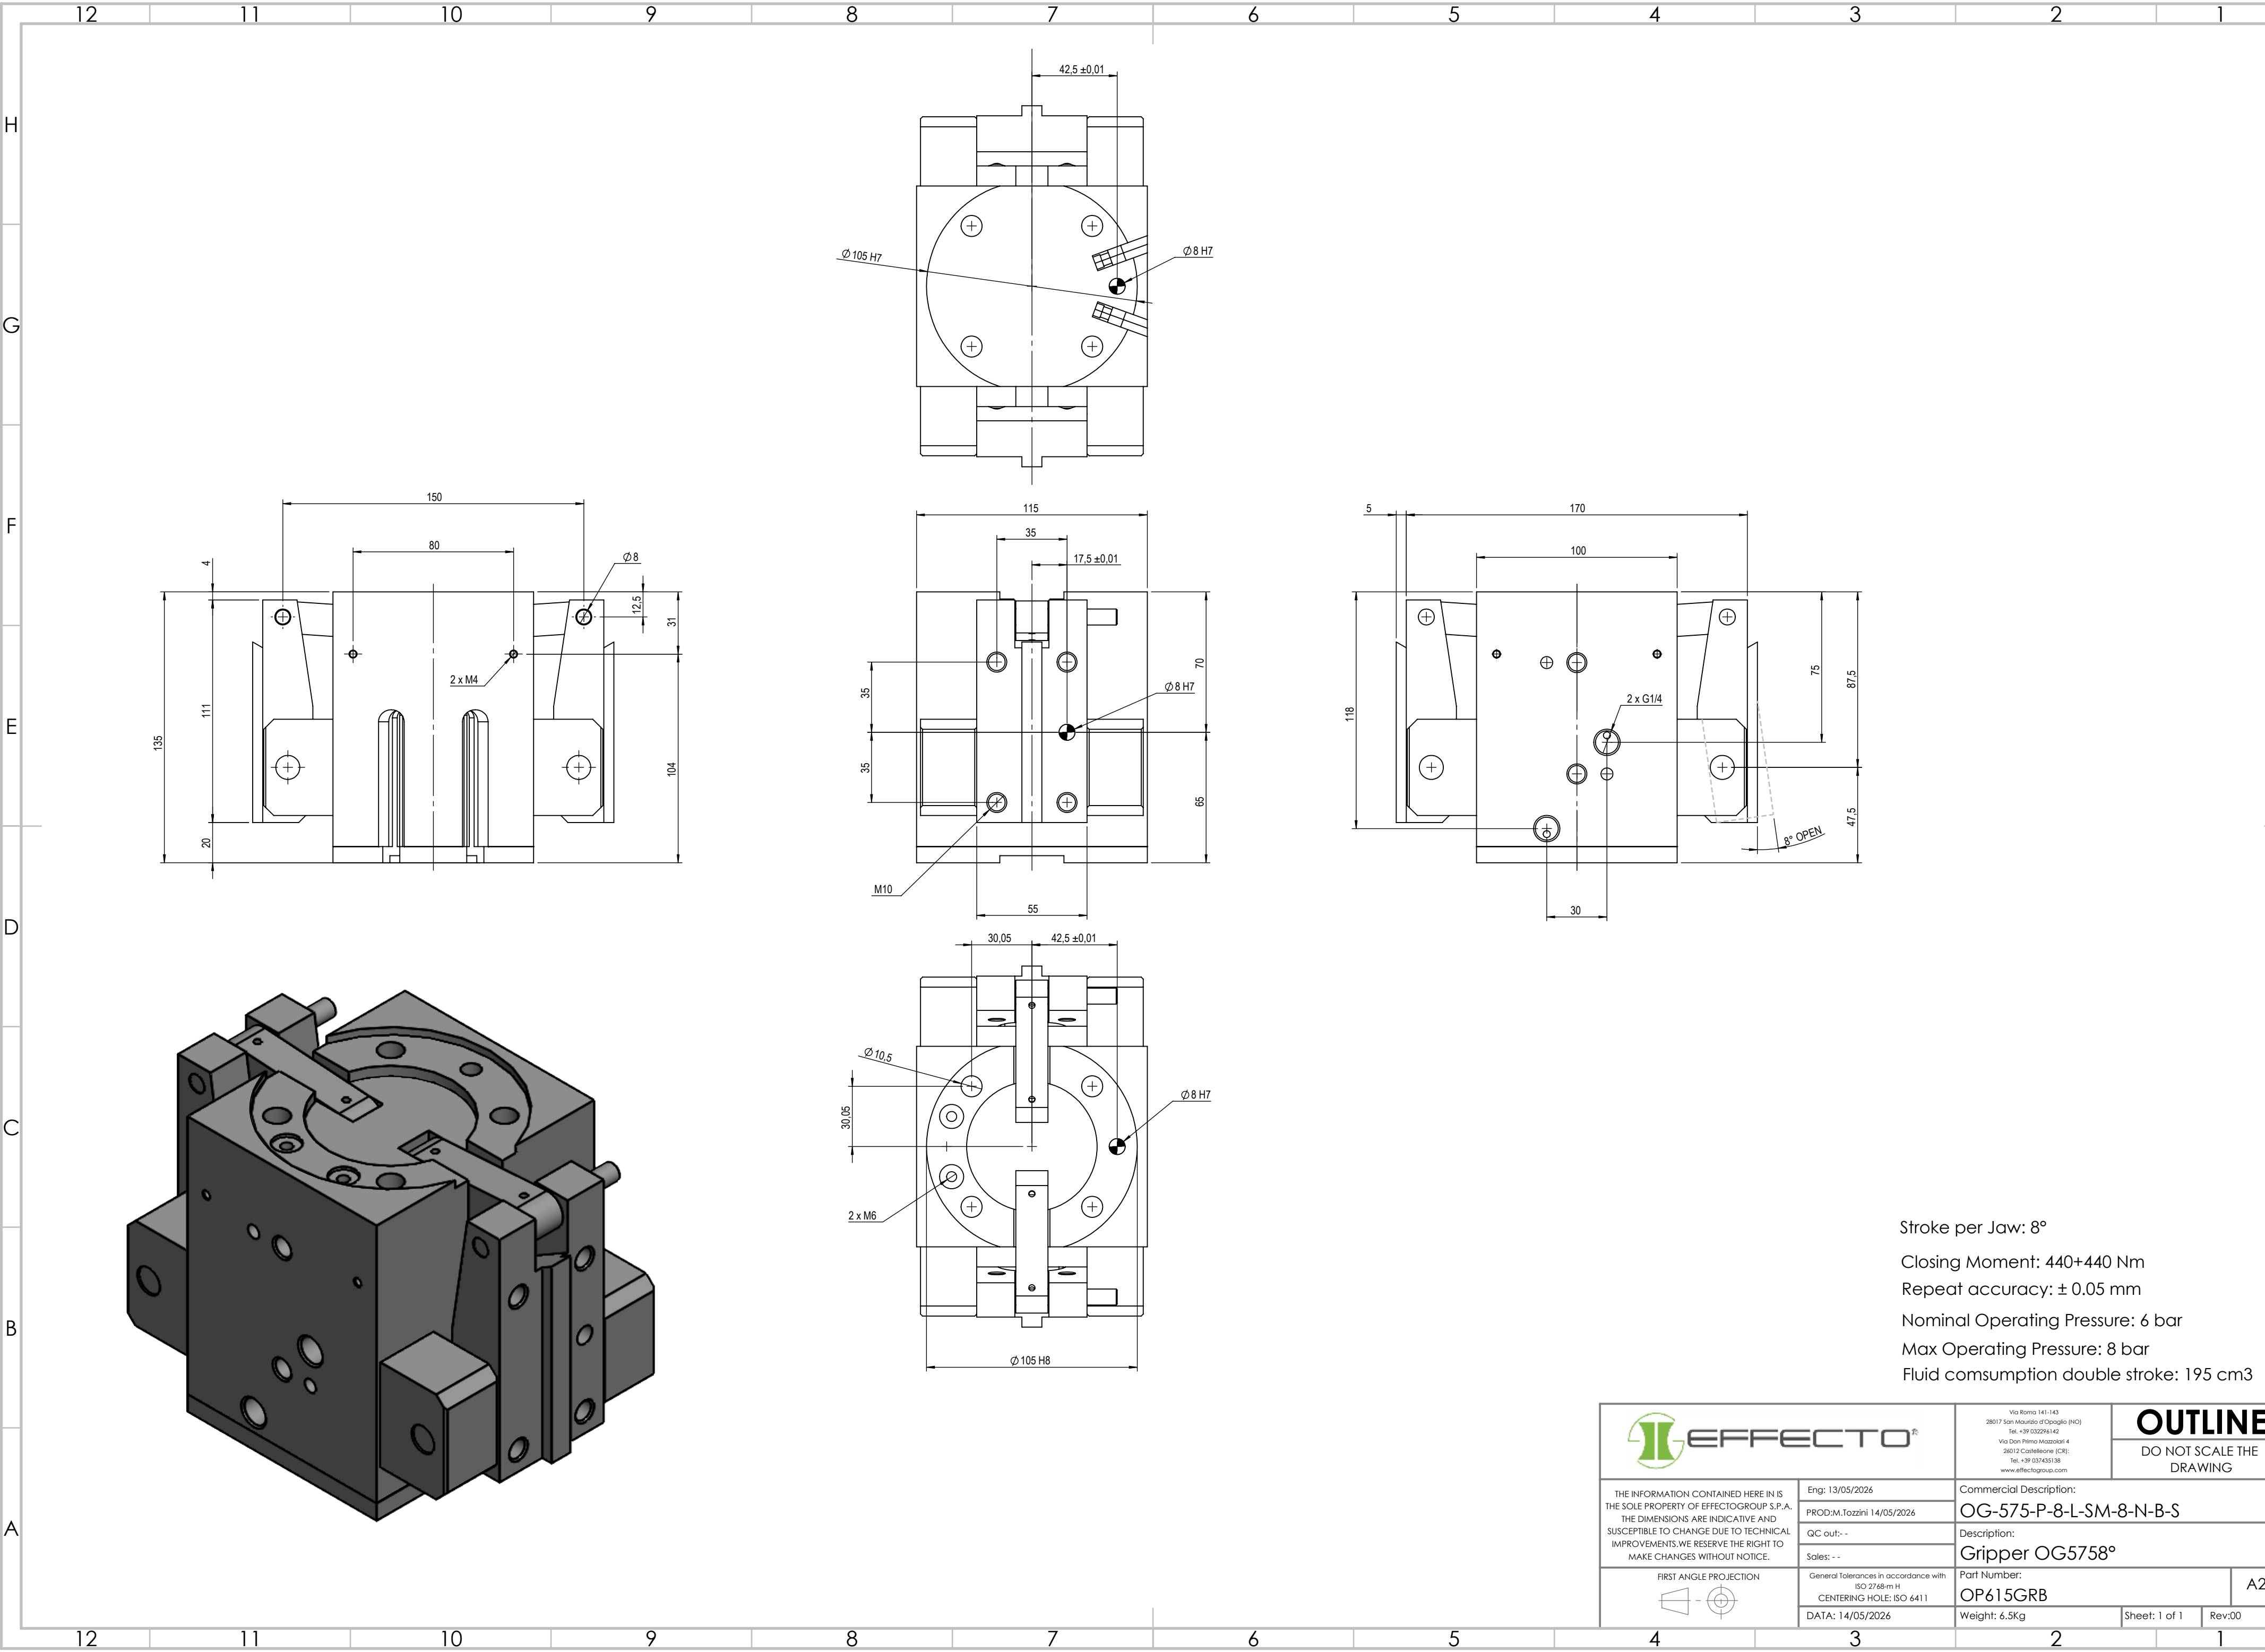

Stroke per Jaw: 8°  
Closing Moment: 440+440 Nm  
Repeat accuracy: ± 0.05 mm  
Nominal Operating Pressure: 6 bar  
Max Operating Pressure: 8 bar  
Fluid consumption double stroke: 195 cm3

|                                                                                                                                                                                                                                           |  |                                                                                                                                                                                   |  |                                                            |               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------|---------------|
|                                                                                                                                                      |  | Via Roma 141-143<br>28017 / San Maurizio d'Oleggio (NO)<br>Tel. +39 032296142<br>Via Don Primo Mazzolari 4<br>28012 Castellone (CR)<br>Tel. +39 037435138<br>www.effectogroup.com |  | <div>OUTLINE</div> <div>DO NOT SCALE THE<br/>DRAWING</div> |               |
| THE INFORMATION CONTAINED HERE IN IS<br>THE SOLE PROPERTY OF EFFECTO GROUP S.P.A.<br>THE DIMENSIONS ARE INDICATIVE AND<br>SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL<br>IMPROVEMENTS. WE RESERVE THE RIGHT TO<br>MAKE CHANGES WITHOUT NOTICE. |  | Eng: 13/05/2026                                                                                                                                                                   |  | Commercial Description:                                    |               |
|                                                                                                                                                                                                                                           |  | PROD:M.Tozzini 14/05/2026                                                                                                                                                         |  | OG-575-P-8-L-SM-8-N-B-S                                    |               |
|                                                                                                                                                                                                                                           |  | QC out: -                                                                                                                                                                         |  | Description:                                               |               |
|                                                                                                                                                                                                                                           |  | Sales: - -                                                                                                                                                                        |  | Gripper OG5758°                                            |               |
| <div>FIRST ANGLE PROJECTION</div>                                                                                                                    |  | General Tolerances in accordance with<br>ISO 2768-m H<br>CENTERING HOLE: ISO 6411                                                                                                 |  | Part Number:                                               |               |
|                                                                                                                                                                                                                                           |  | DATA: 14/05/2026                                                                                                                                                                  |  | OP615GRB                                                   |               |
|                                                                                                                                                                                                                                           |  |                                                                                                                                                                                   |  | Weight: 6.5Kg                                              | Sheet: 1 of 1 |
|                                                                                                                                                                                                                                           |  |                                                                                                                                                                                   |  |                                                            | Rev:00        |
|                                                                                                                                                                                                                                           |  |                                                                                                                                                                                   |  |                                                            | A2            |