
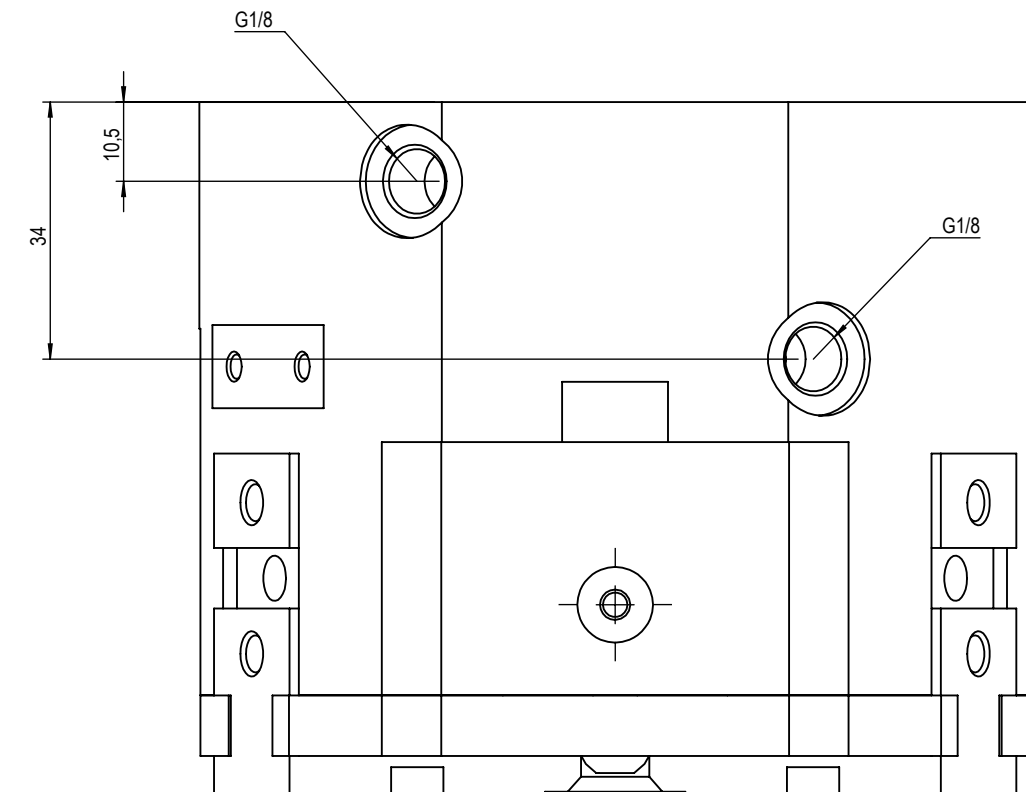
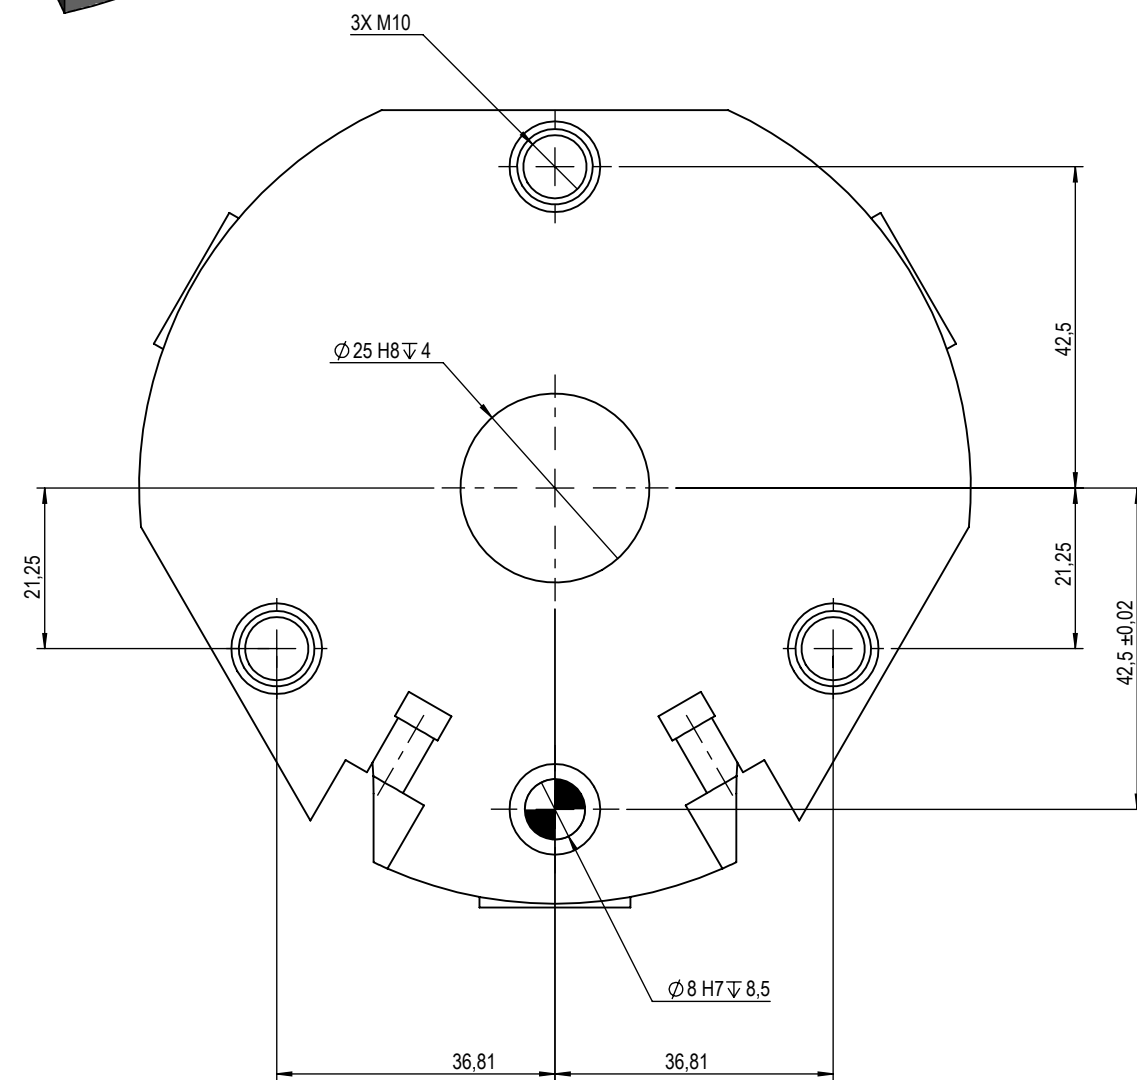
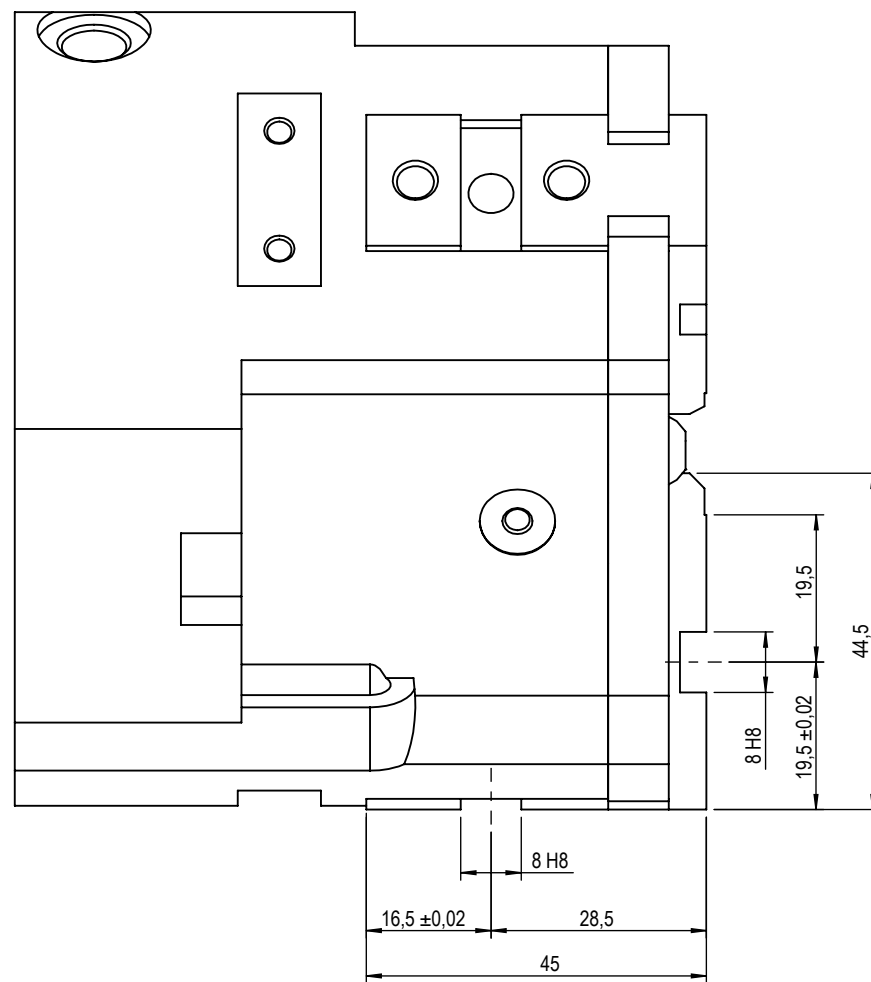
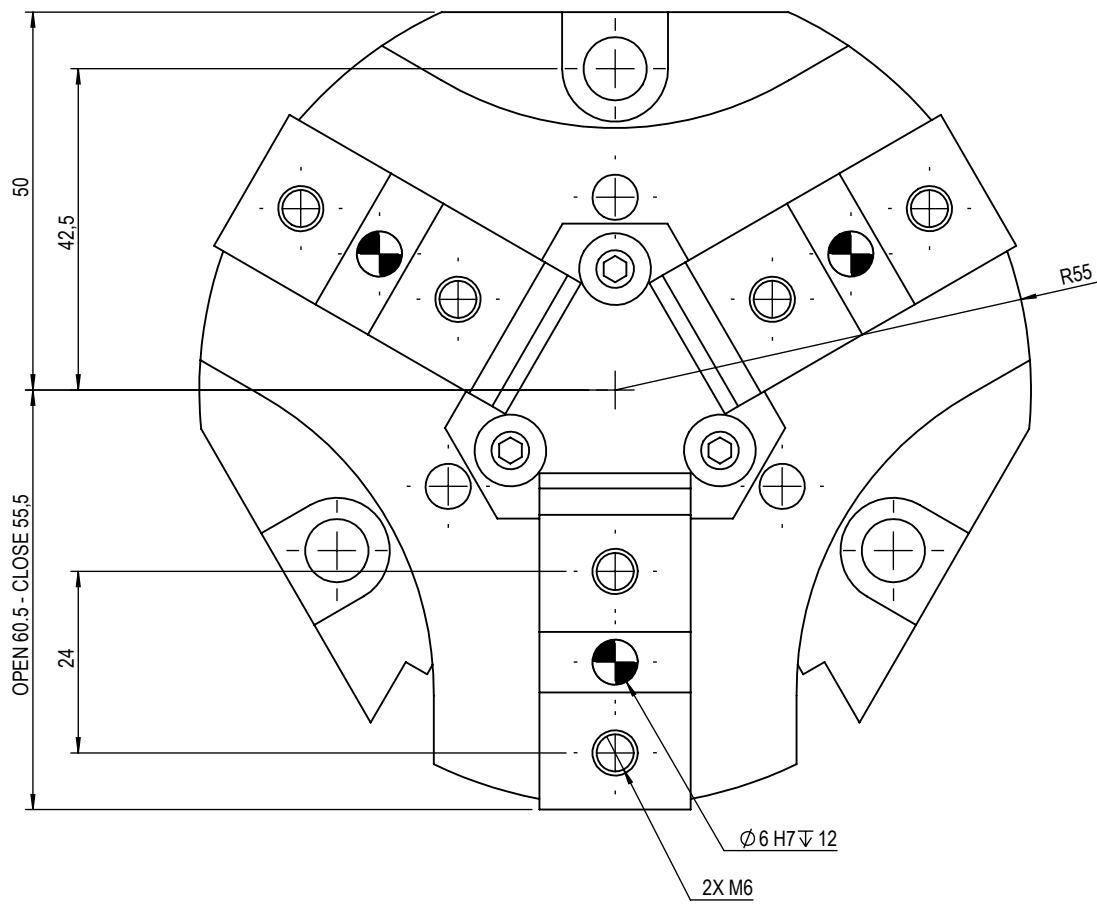
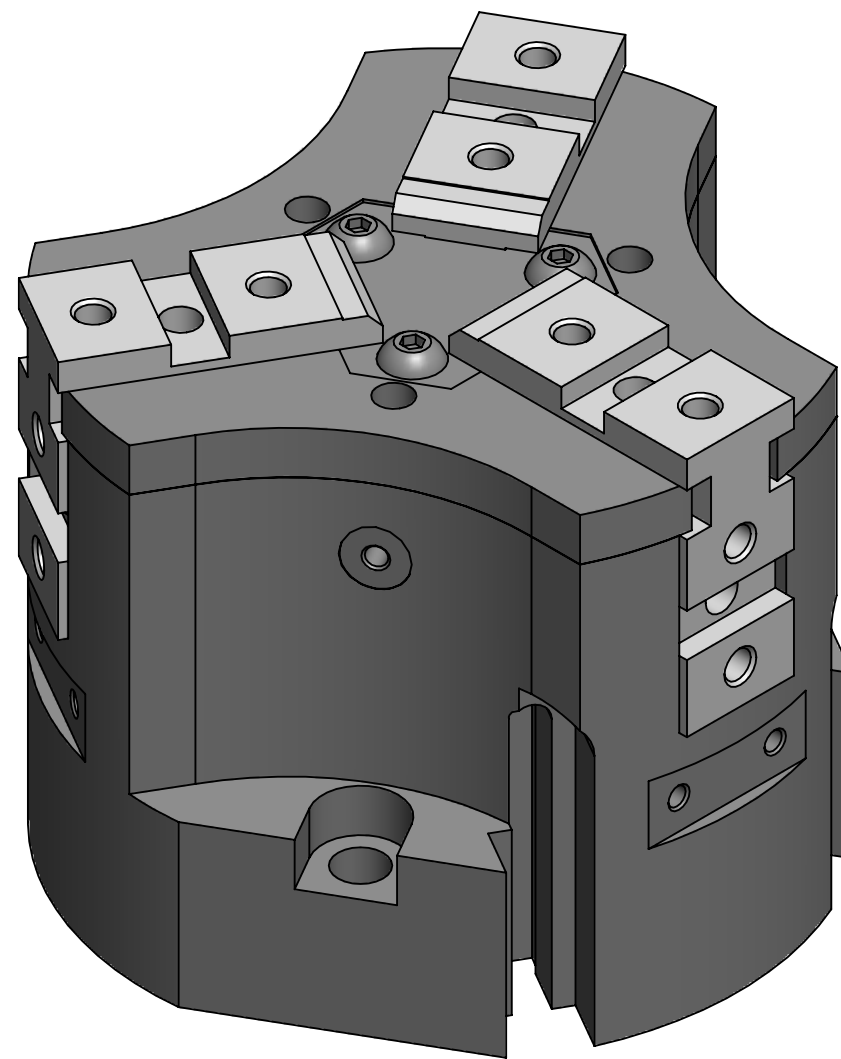
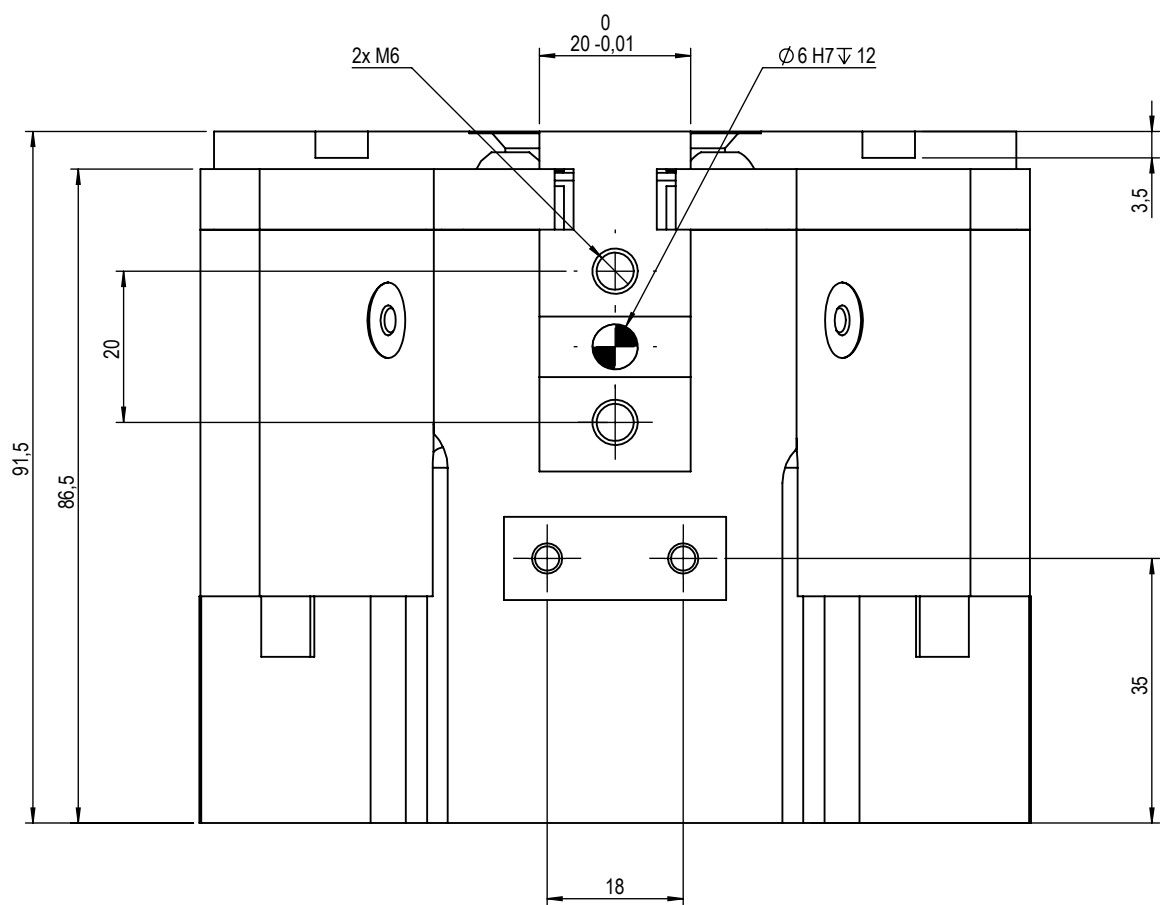




Stroke per Jaw: 5 mm
Closing Force: 629+629+629 N
Opening Force: 671+671+671 N
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 12 bar
Fluid consumption double stroke: 60.5 cm³

	Via Roma 141-143 28017 San Maurizio d'Oleggio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 28013 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
	Eng: 05/05/2026 PROD:M.Tozzini 06/05/2026 QC out: - Sales: -		Commercial Description: OPE-110-P-5-L-SM-12-N-B-S Description: Gripper OPE110-3S	
	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 06/05/2026		Part Number: OE679PLS Weight: 2.2Kg	A2
	FIRST ANGLE PROJECTION 		Sheet: 1 of 1	Rev:00