
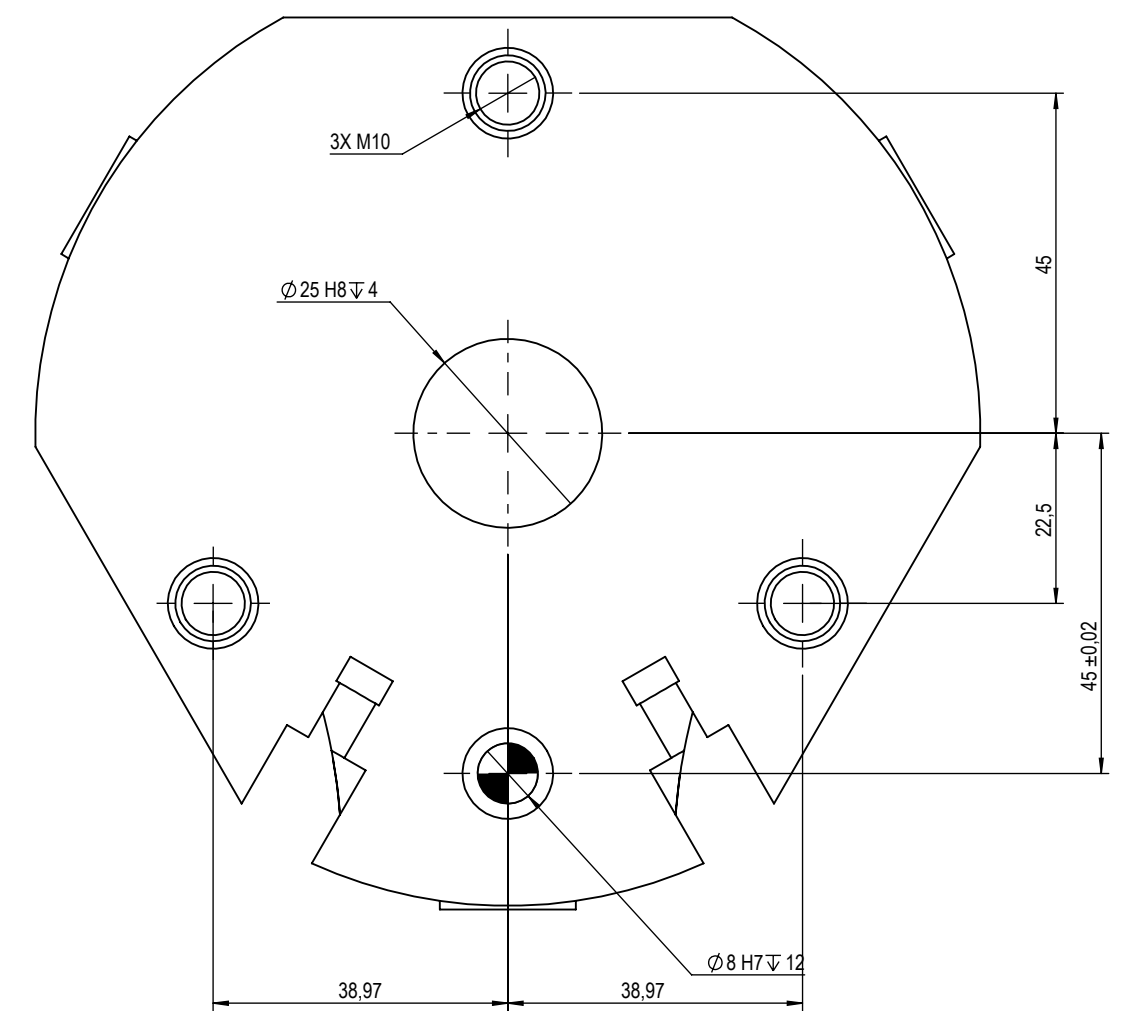
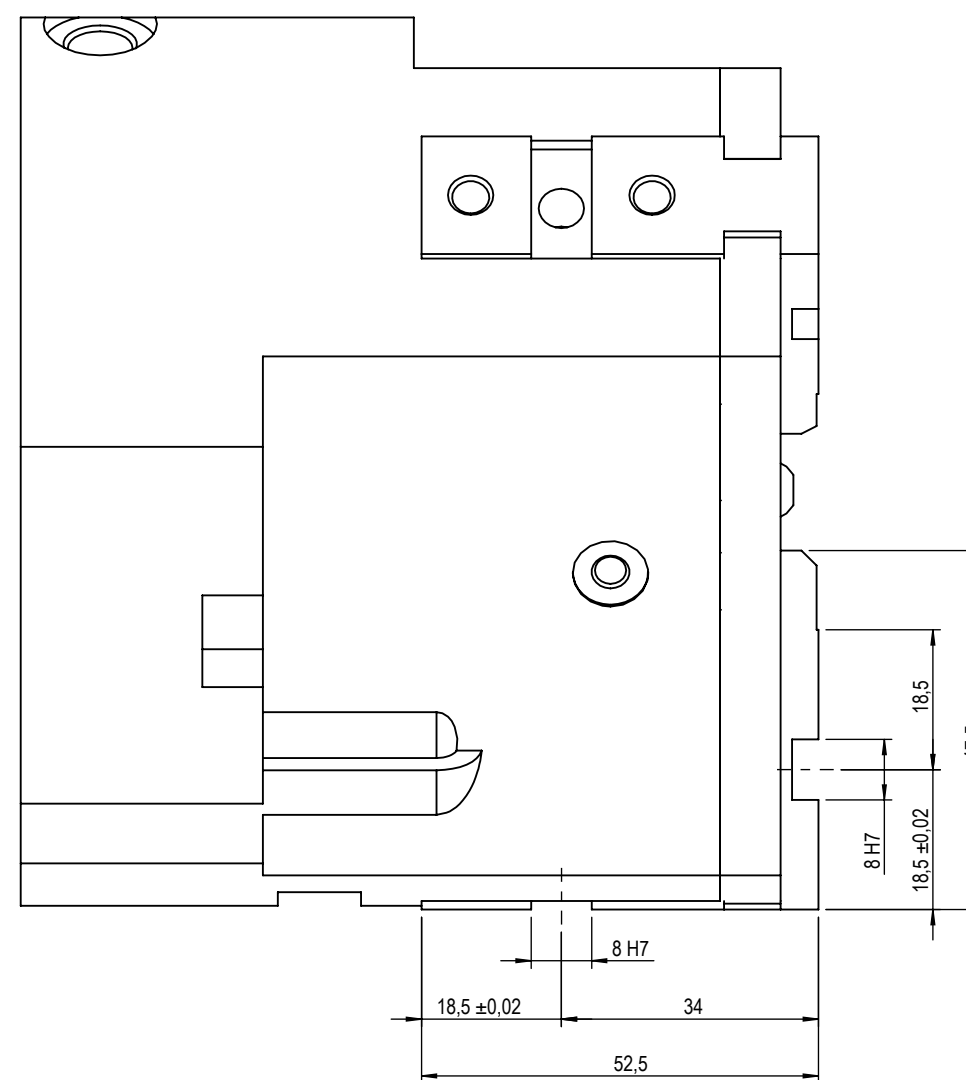
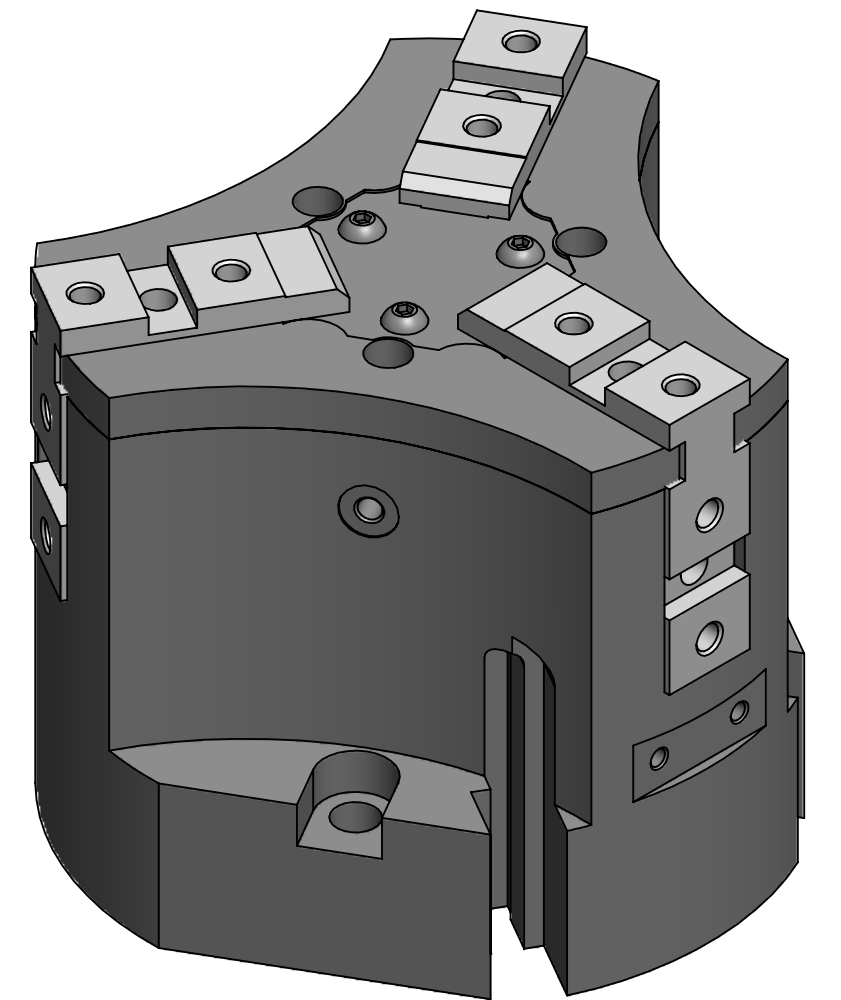
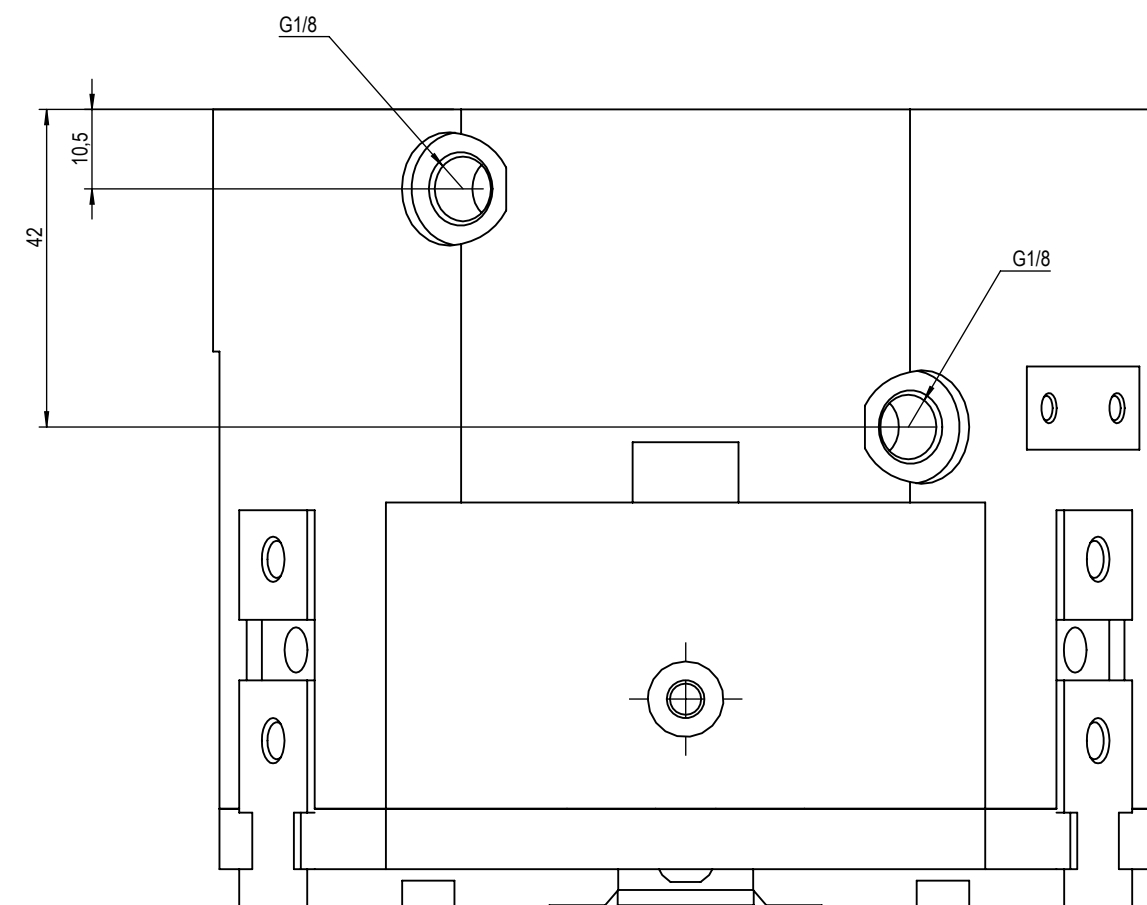
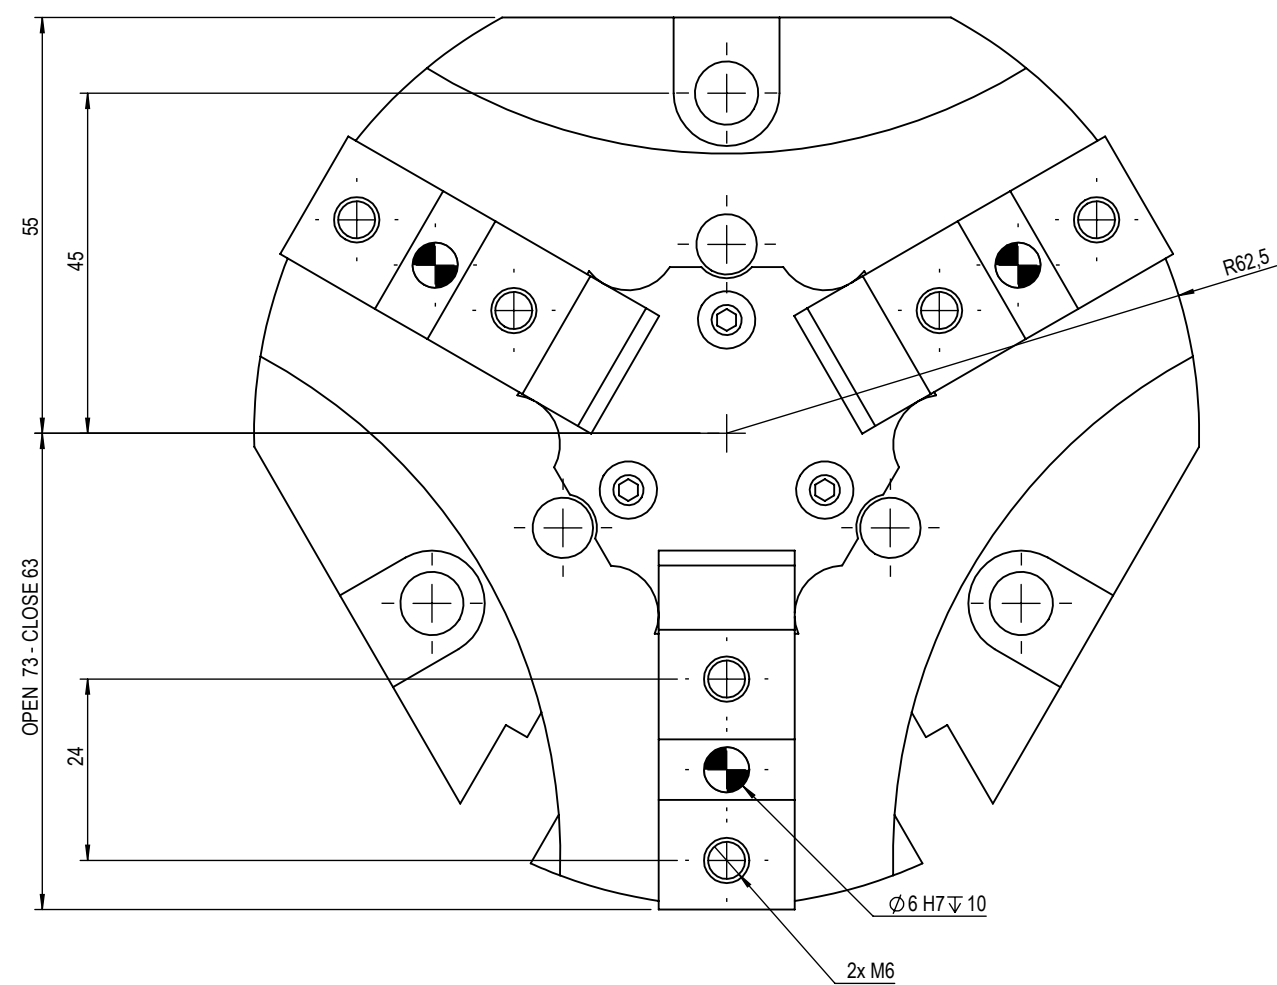


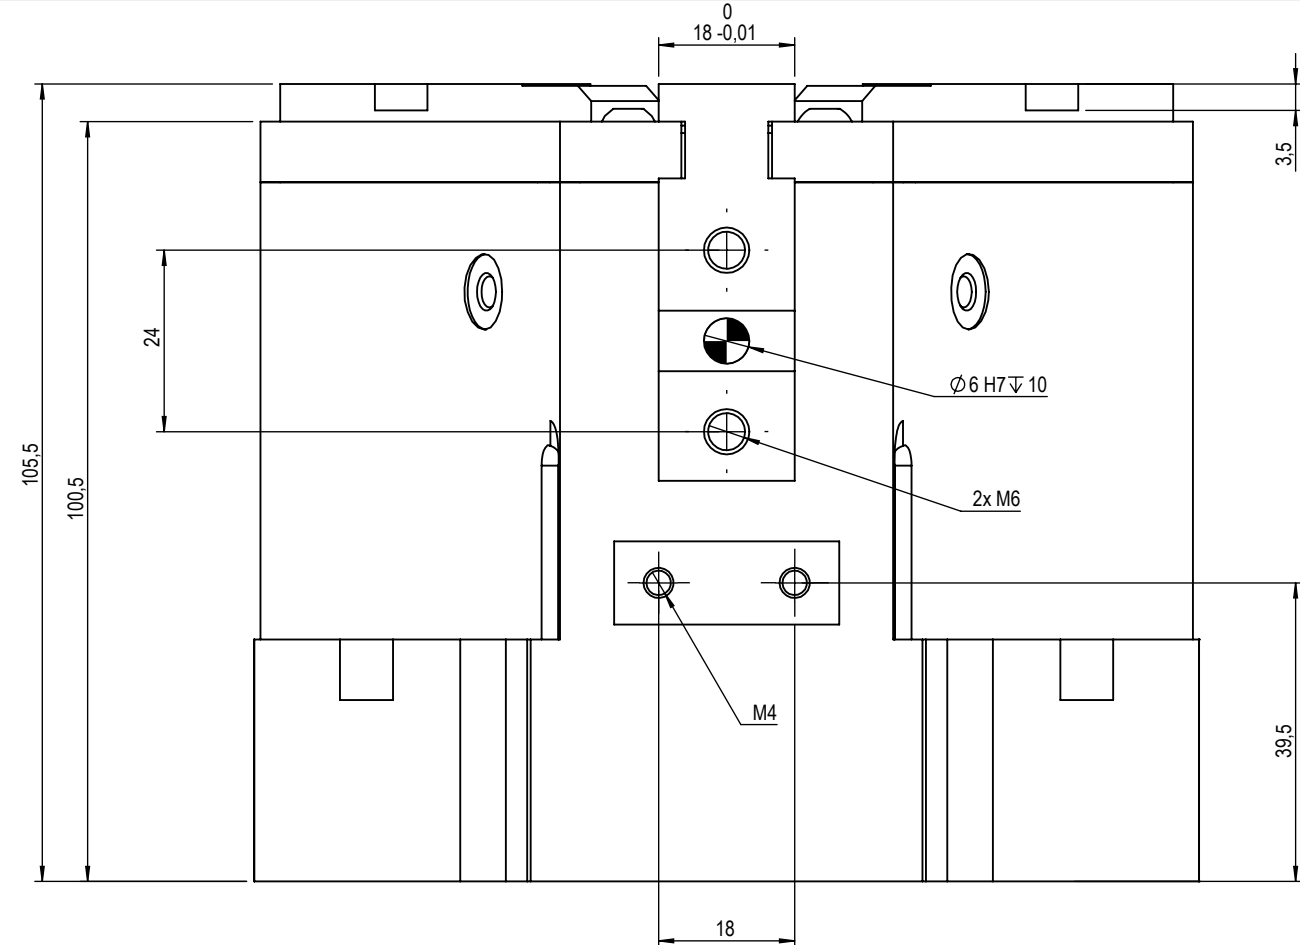

Stroke per Jaw: 10 mm
Closing Force: 787+787+787 N
Opening Force: 830+830+830 N
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 12 bar
Fluid consumption double stroke: 150 cm³

 EFFECTO®		Via Roma 141-143 26017 San Maurizio d'Opaglio (NO) Tel. +39 032291142 Via Don Pirmo Mazzacchi 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTOGROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 05/05/2026		Commercial Description:	
		PROD:M.Tozzini 06/05/2026		OPE-125-P-10-L-SM-12-N-B-S	
		QC out: -		Description:	
		Sales: - -		Gripper OPE125-3S	
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411 DATA: 06/05/2026		Part Number: OE675PFS	
				Weight: 2.95Kg	A2
				Sheet: 1 of 1	Rev:00
4		3		2	
				1	