
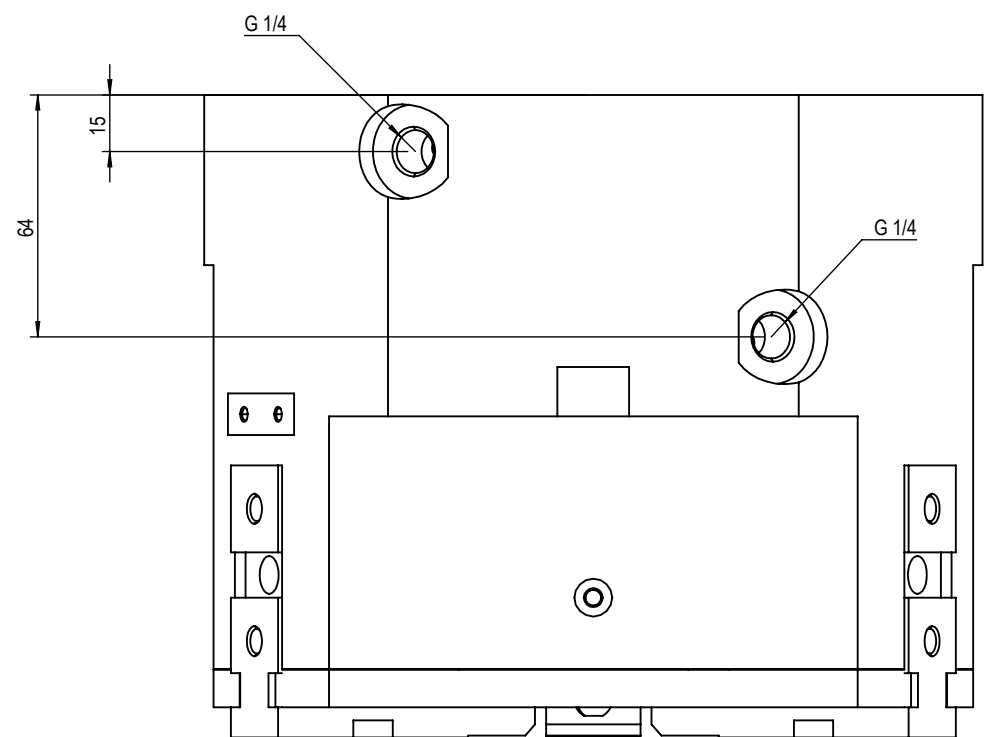
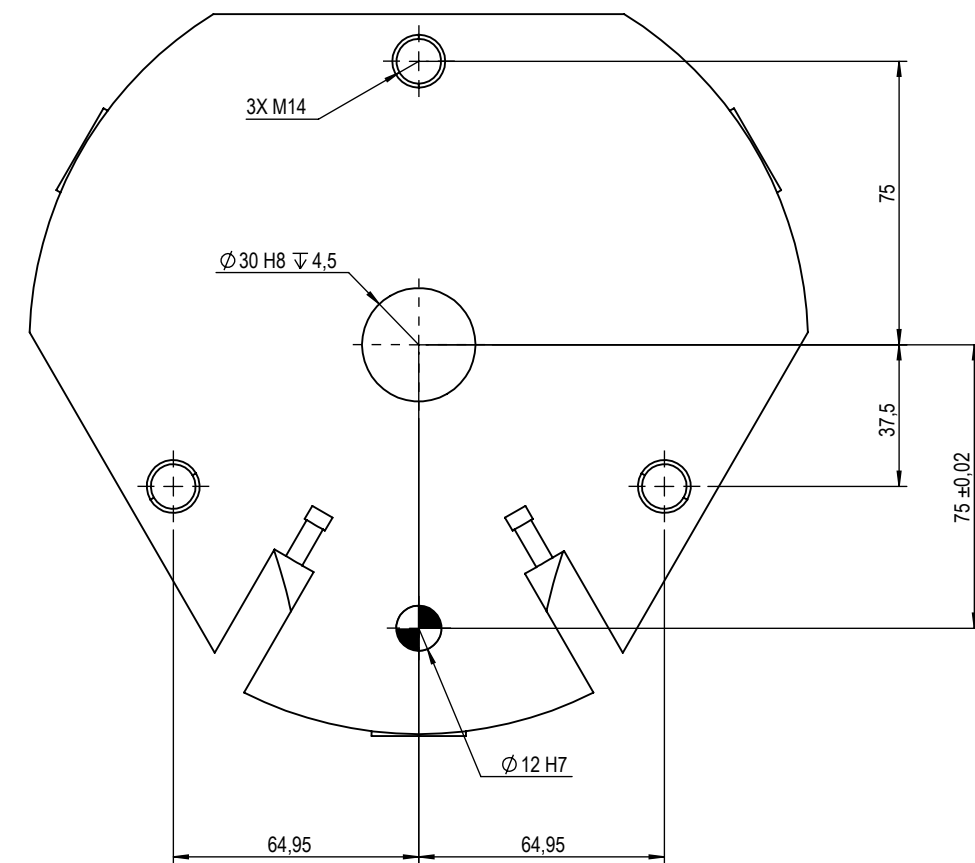
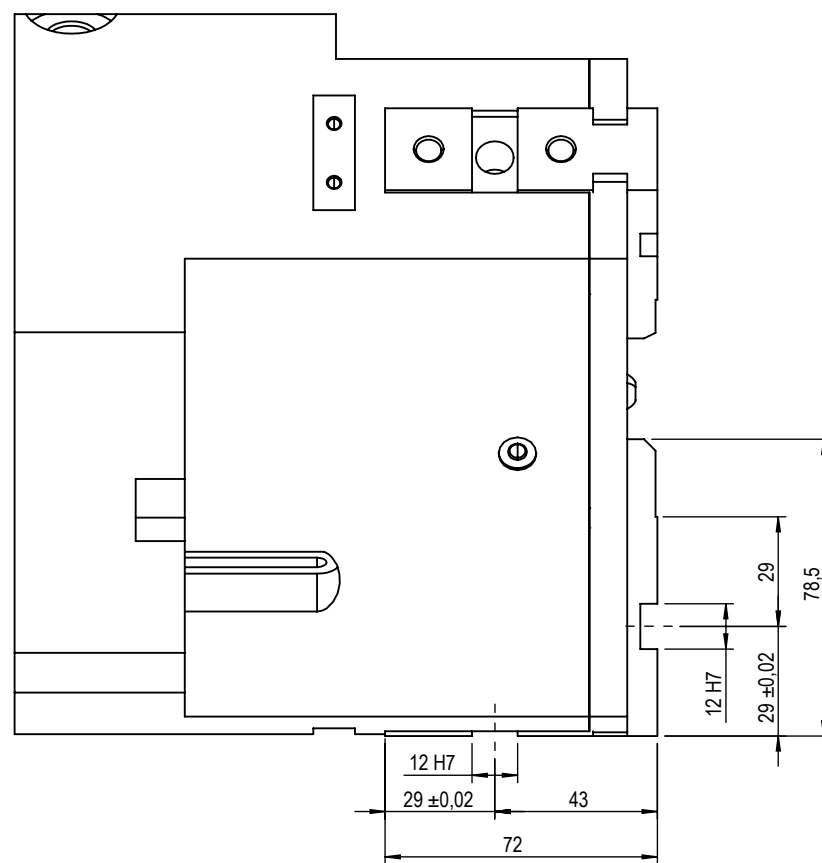
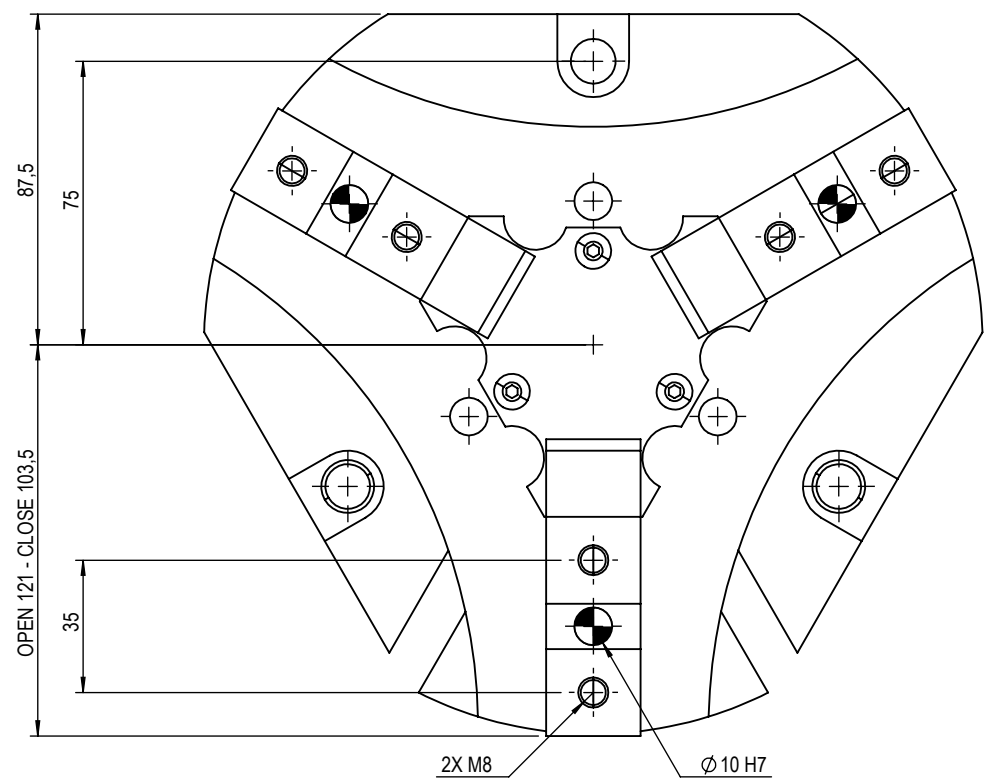
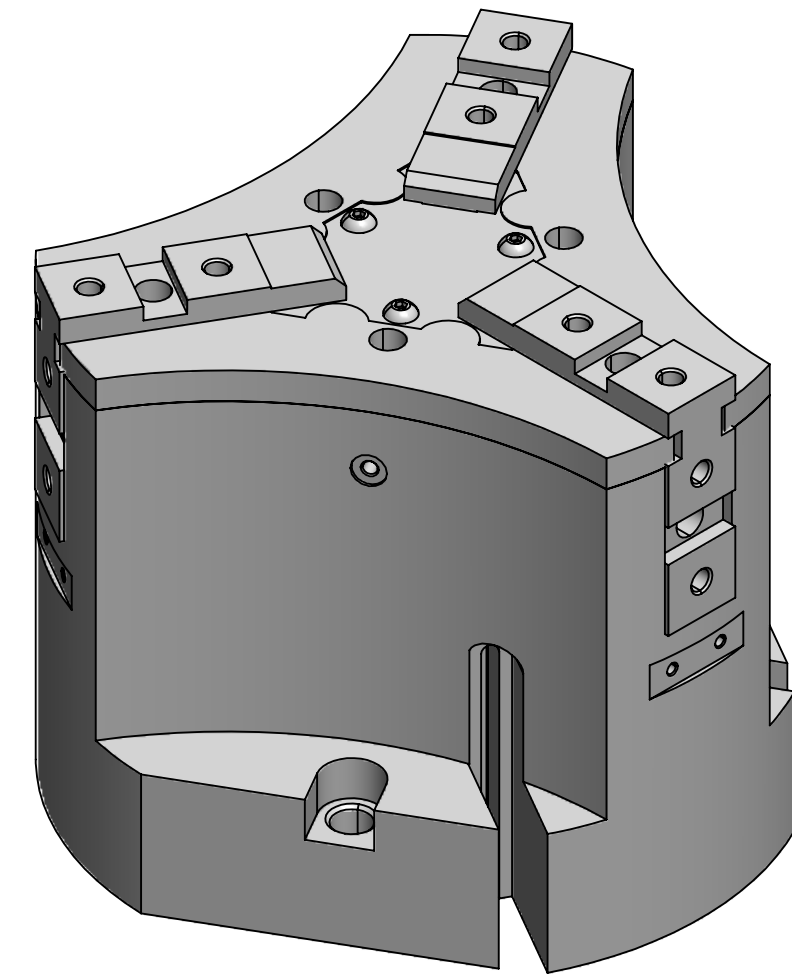
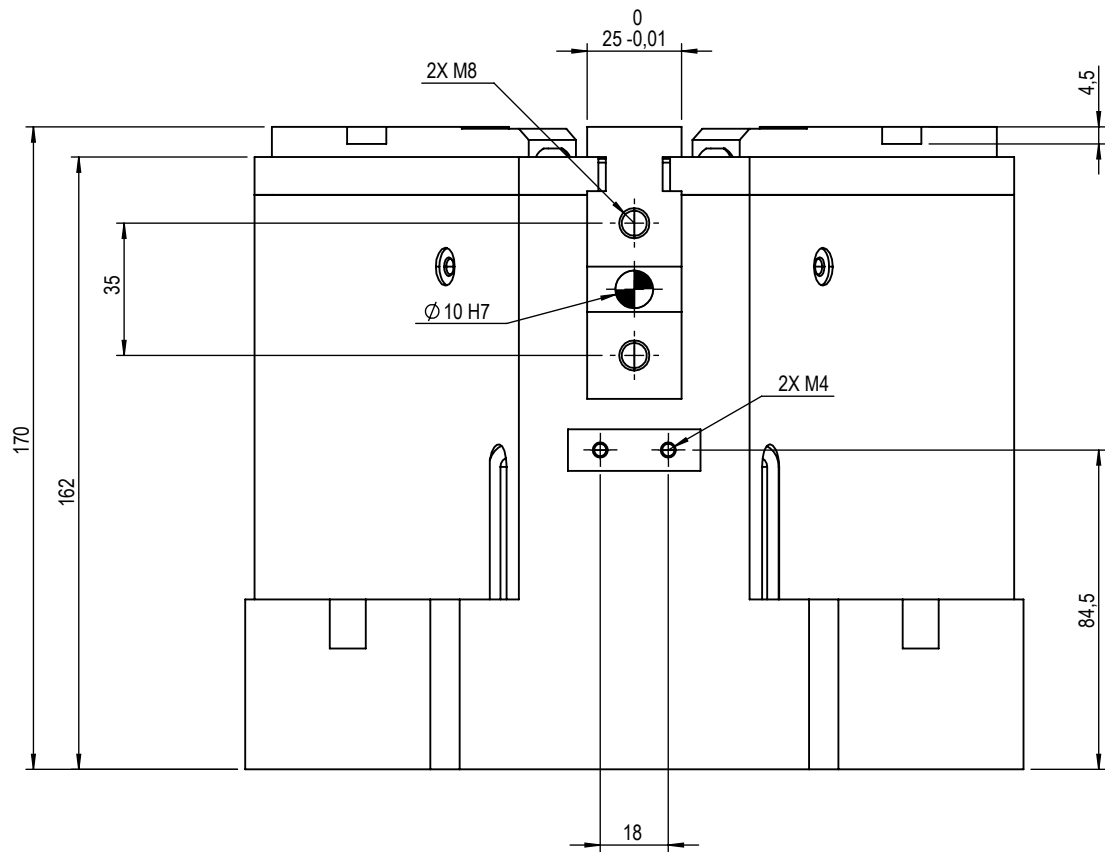




Stroke per Jaw: 17.5 mm
Closing Force: 1580+1580+1580 N
Opening Force: 1686+1686+1686 N
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 12 bar
Fluid consumption double stroke: 533 cm³

		Via Roma 141-143 26017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 05/05/2026		Commercial Description:	
		PROD: M. Tozzini 06/05/2026		OPE-205-P-17.5-L-SM-12-N-B-S	
		QC out: -		Description:	
		Sales: -		Gripper OPE205-3S	
		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:	
		DATA: 06/05/2026		OE677PHS	
		Weight: 11.5Kg		Sheet: 1 of 1 Rev:00	
				A2	