
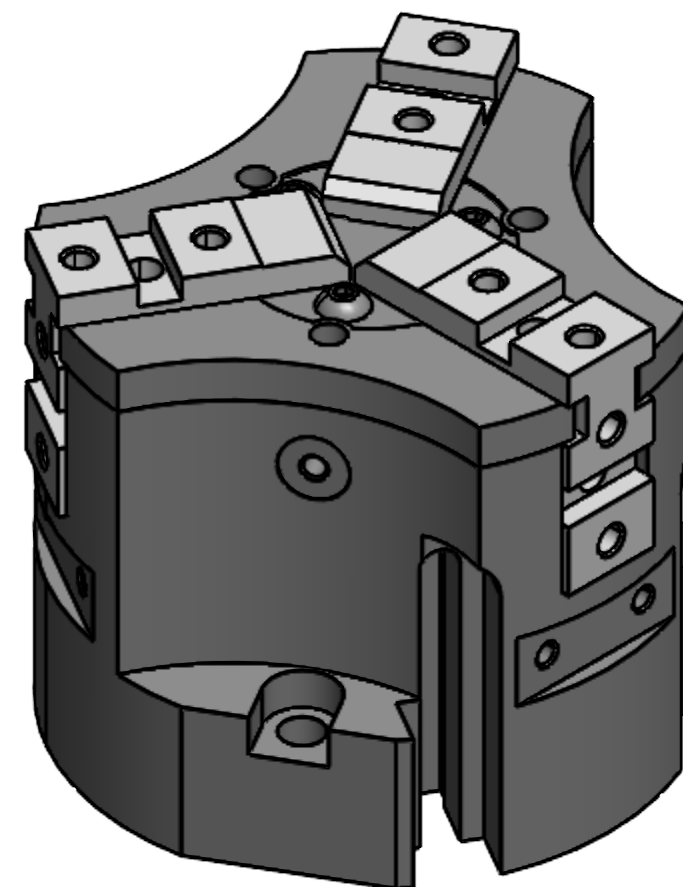
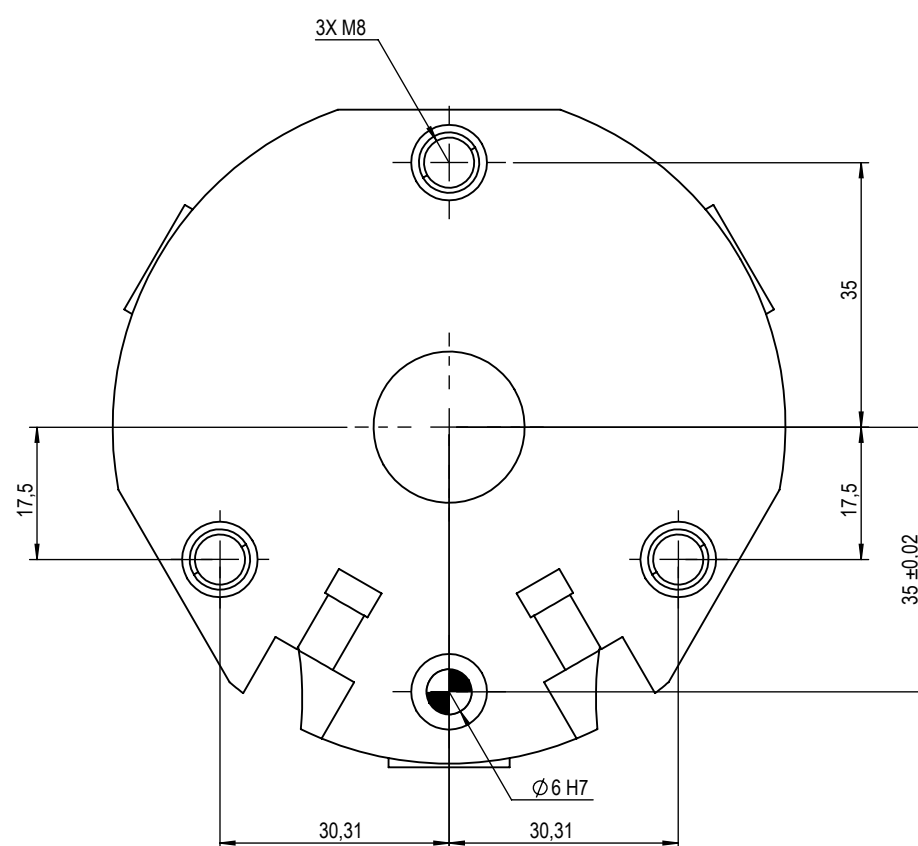
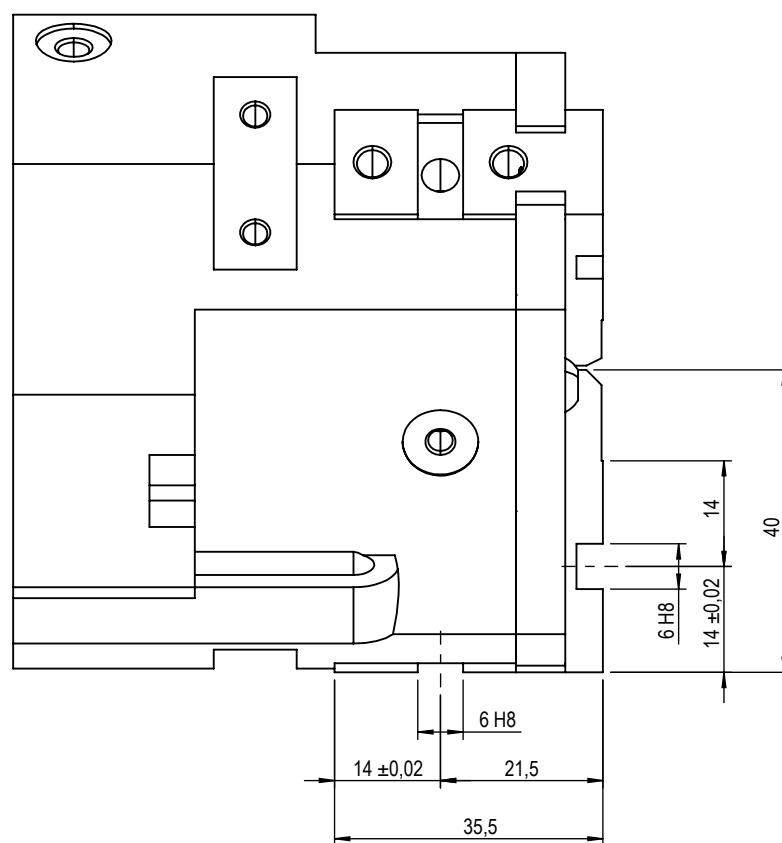
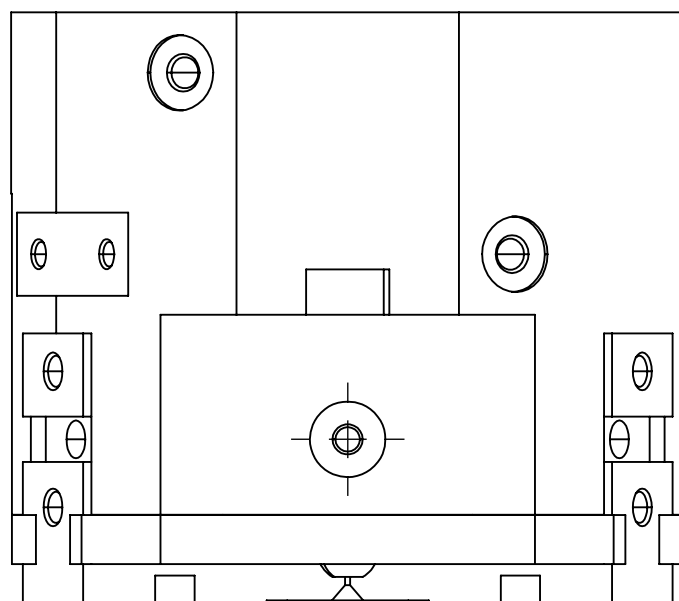
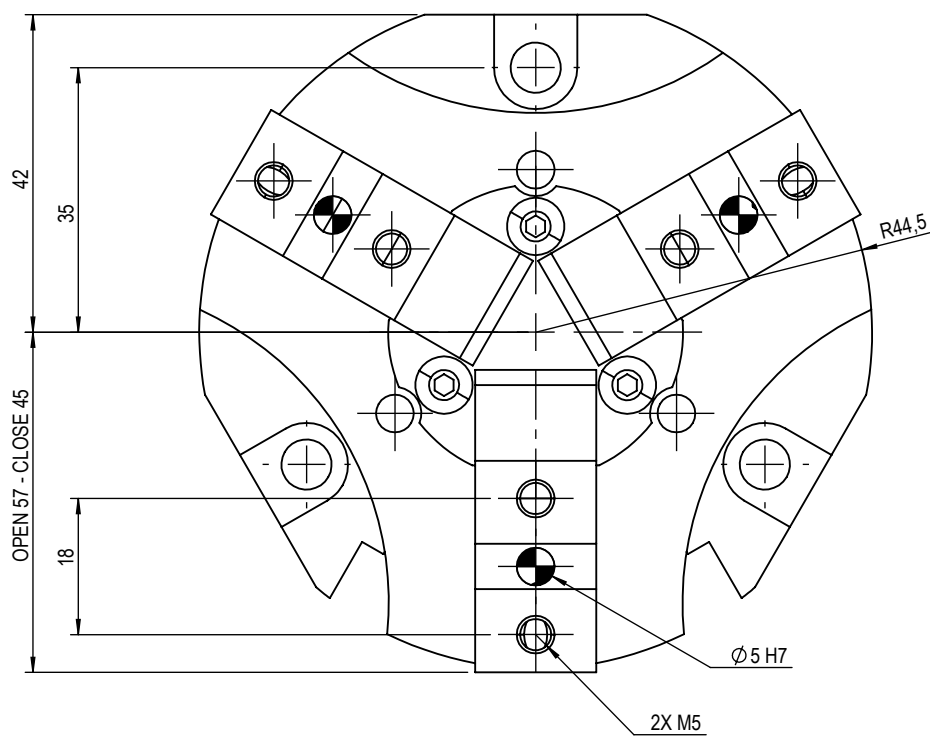


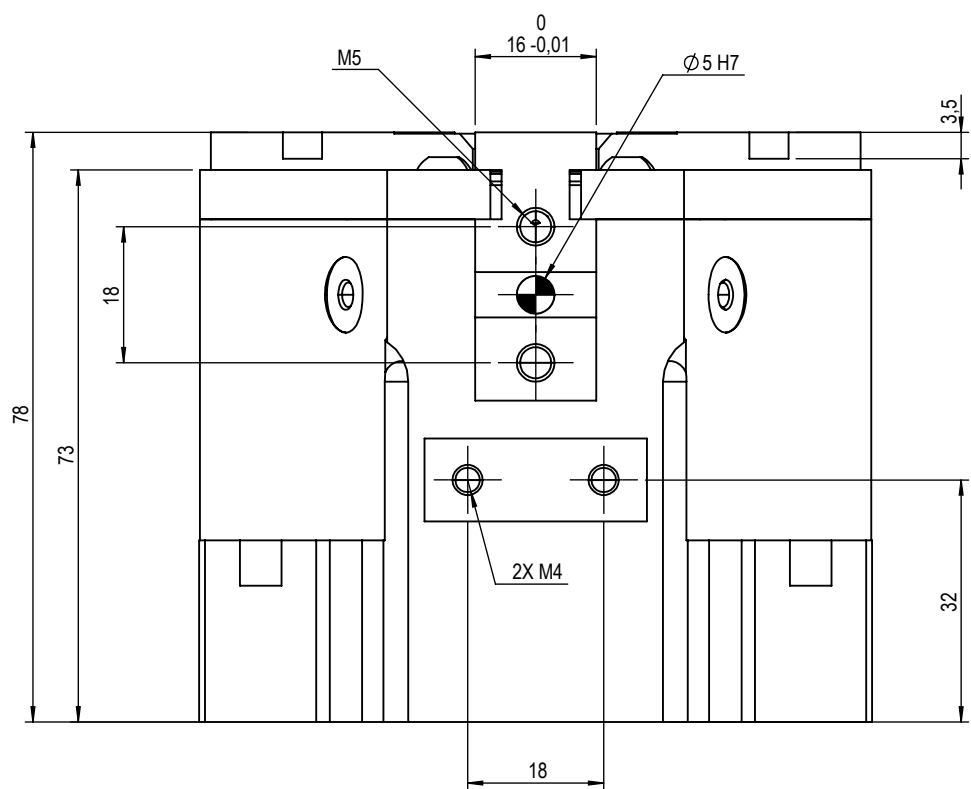

Stroke per Jaw: 12 mm
Closing Force: 155+155+155 N
Opening Force: 172+172+172 N
Repeat accuracy: ± 0.05 mm
Nominal Operating Pressure: 6 bar
Max Operating Pressure: 12 bar
Fluid consumption double stroke: 36.5 cm³

 EFFECTO ®	Via Roma 141-143 28017 San Maurizio d'Ossoglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 28013 Castellone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
	The INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Commercial Description: OPE-90-P-12-L-SM-12-N-B-S	
 FIRST ANGLE PROJECTION	Eng: 12/05/2026		Description: Gripper OPE90-3	
	PROD:M.Tozzini 12/05/2026		Part Number: OE873PDE	
	QC out: -			
	Sales: - -			
 General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411	DATA: 12/05/2026		Weight: 1.3Kg	
			Sheet: 1 of 1	
				Rev:00
				A2