
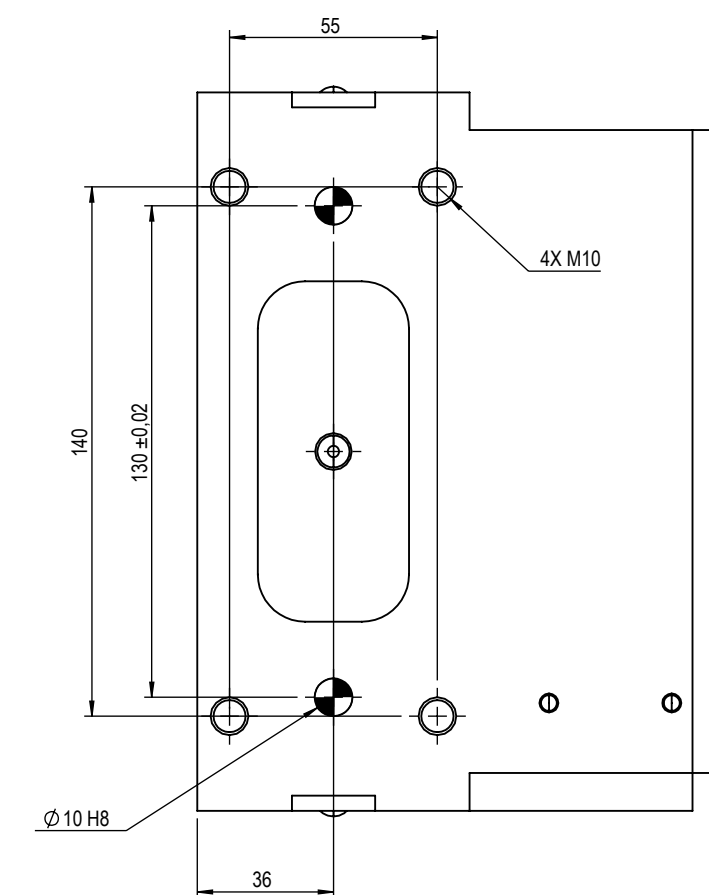
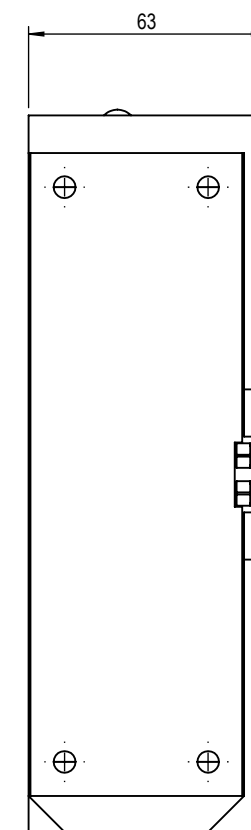
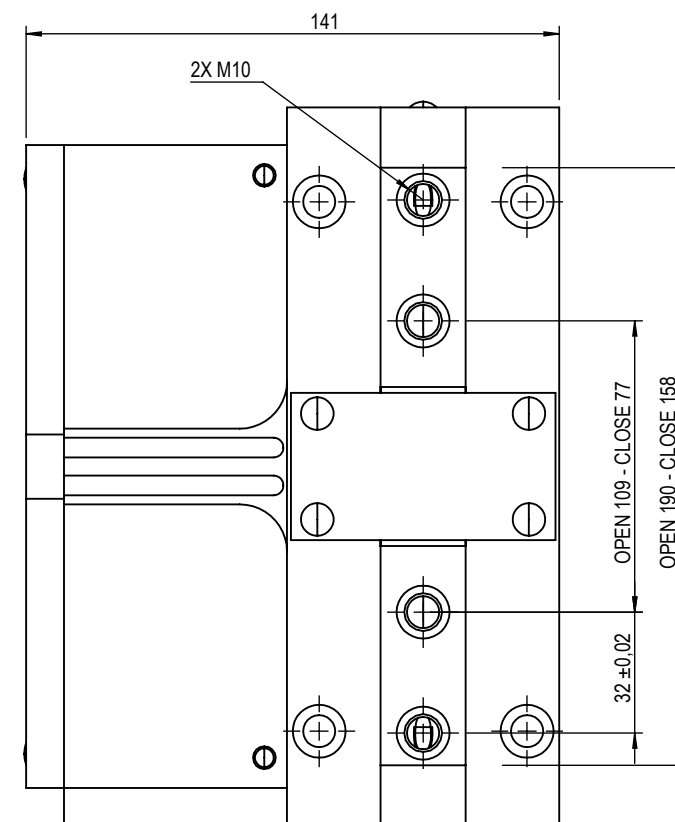
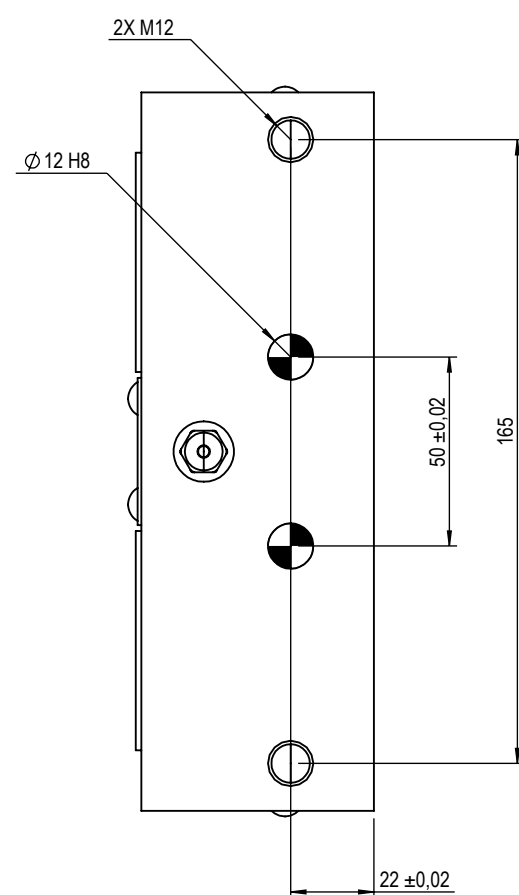
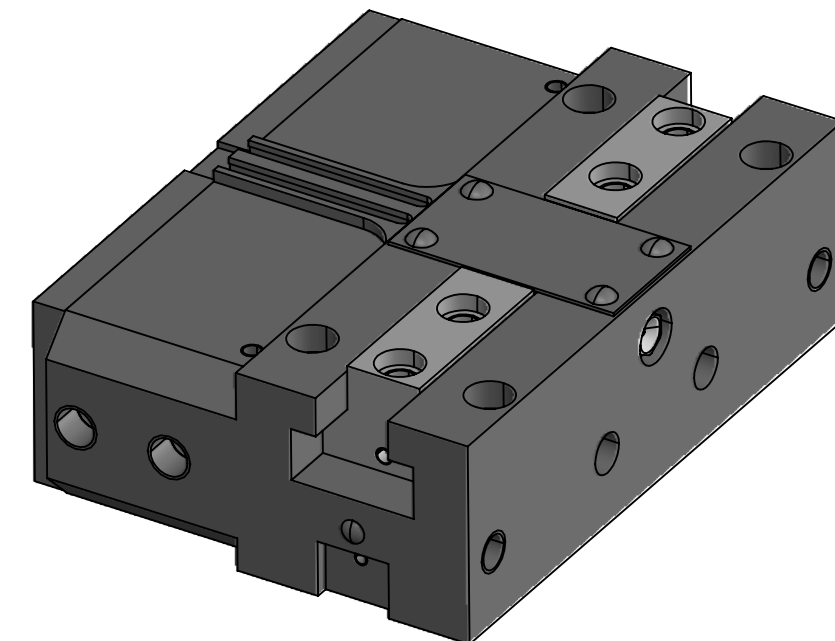
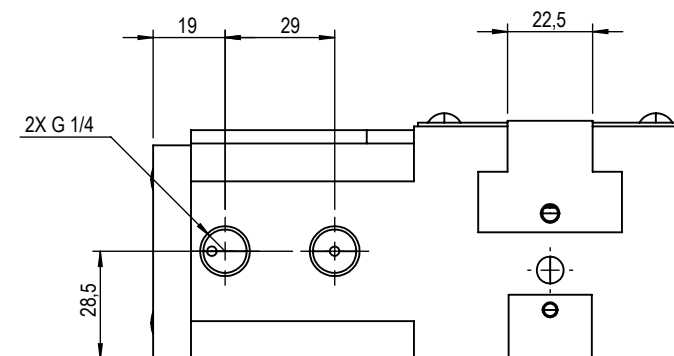




Stroke per Jaw: 16 mm
 Closing Force: 1300+1300 N
 Opening Force: 1090+1090 N
 Repeat accuracy: ± 0.01 mm
 Nominal Operating Pressure: 6 bar
 Max Operating Pressure: 12 bar
 Fluid consumption double stroke: 228 cm³

 EFFECTO [®]		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR): Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS. WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng: 06/05/2026		Commercial Description:	
		PROD:M.Tozzini 07/05/2026		QPG-TECH-216-P-16-U-SM-12-P-B-S	
		QC out:- -		Description:	
		Sales: - -		Gripper QPG-tech216	
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:	
		DATA: 19/05/2026		QT160NBA	
		Weight: 4.2Kg		Sheet: 1 of 1	Rev:00
				A3	