


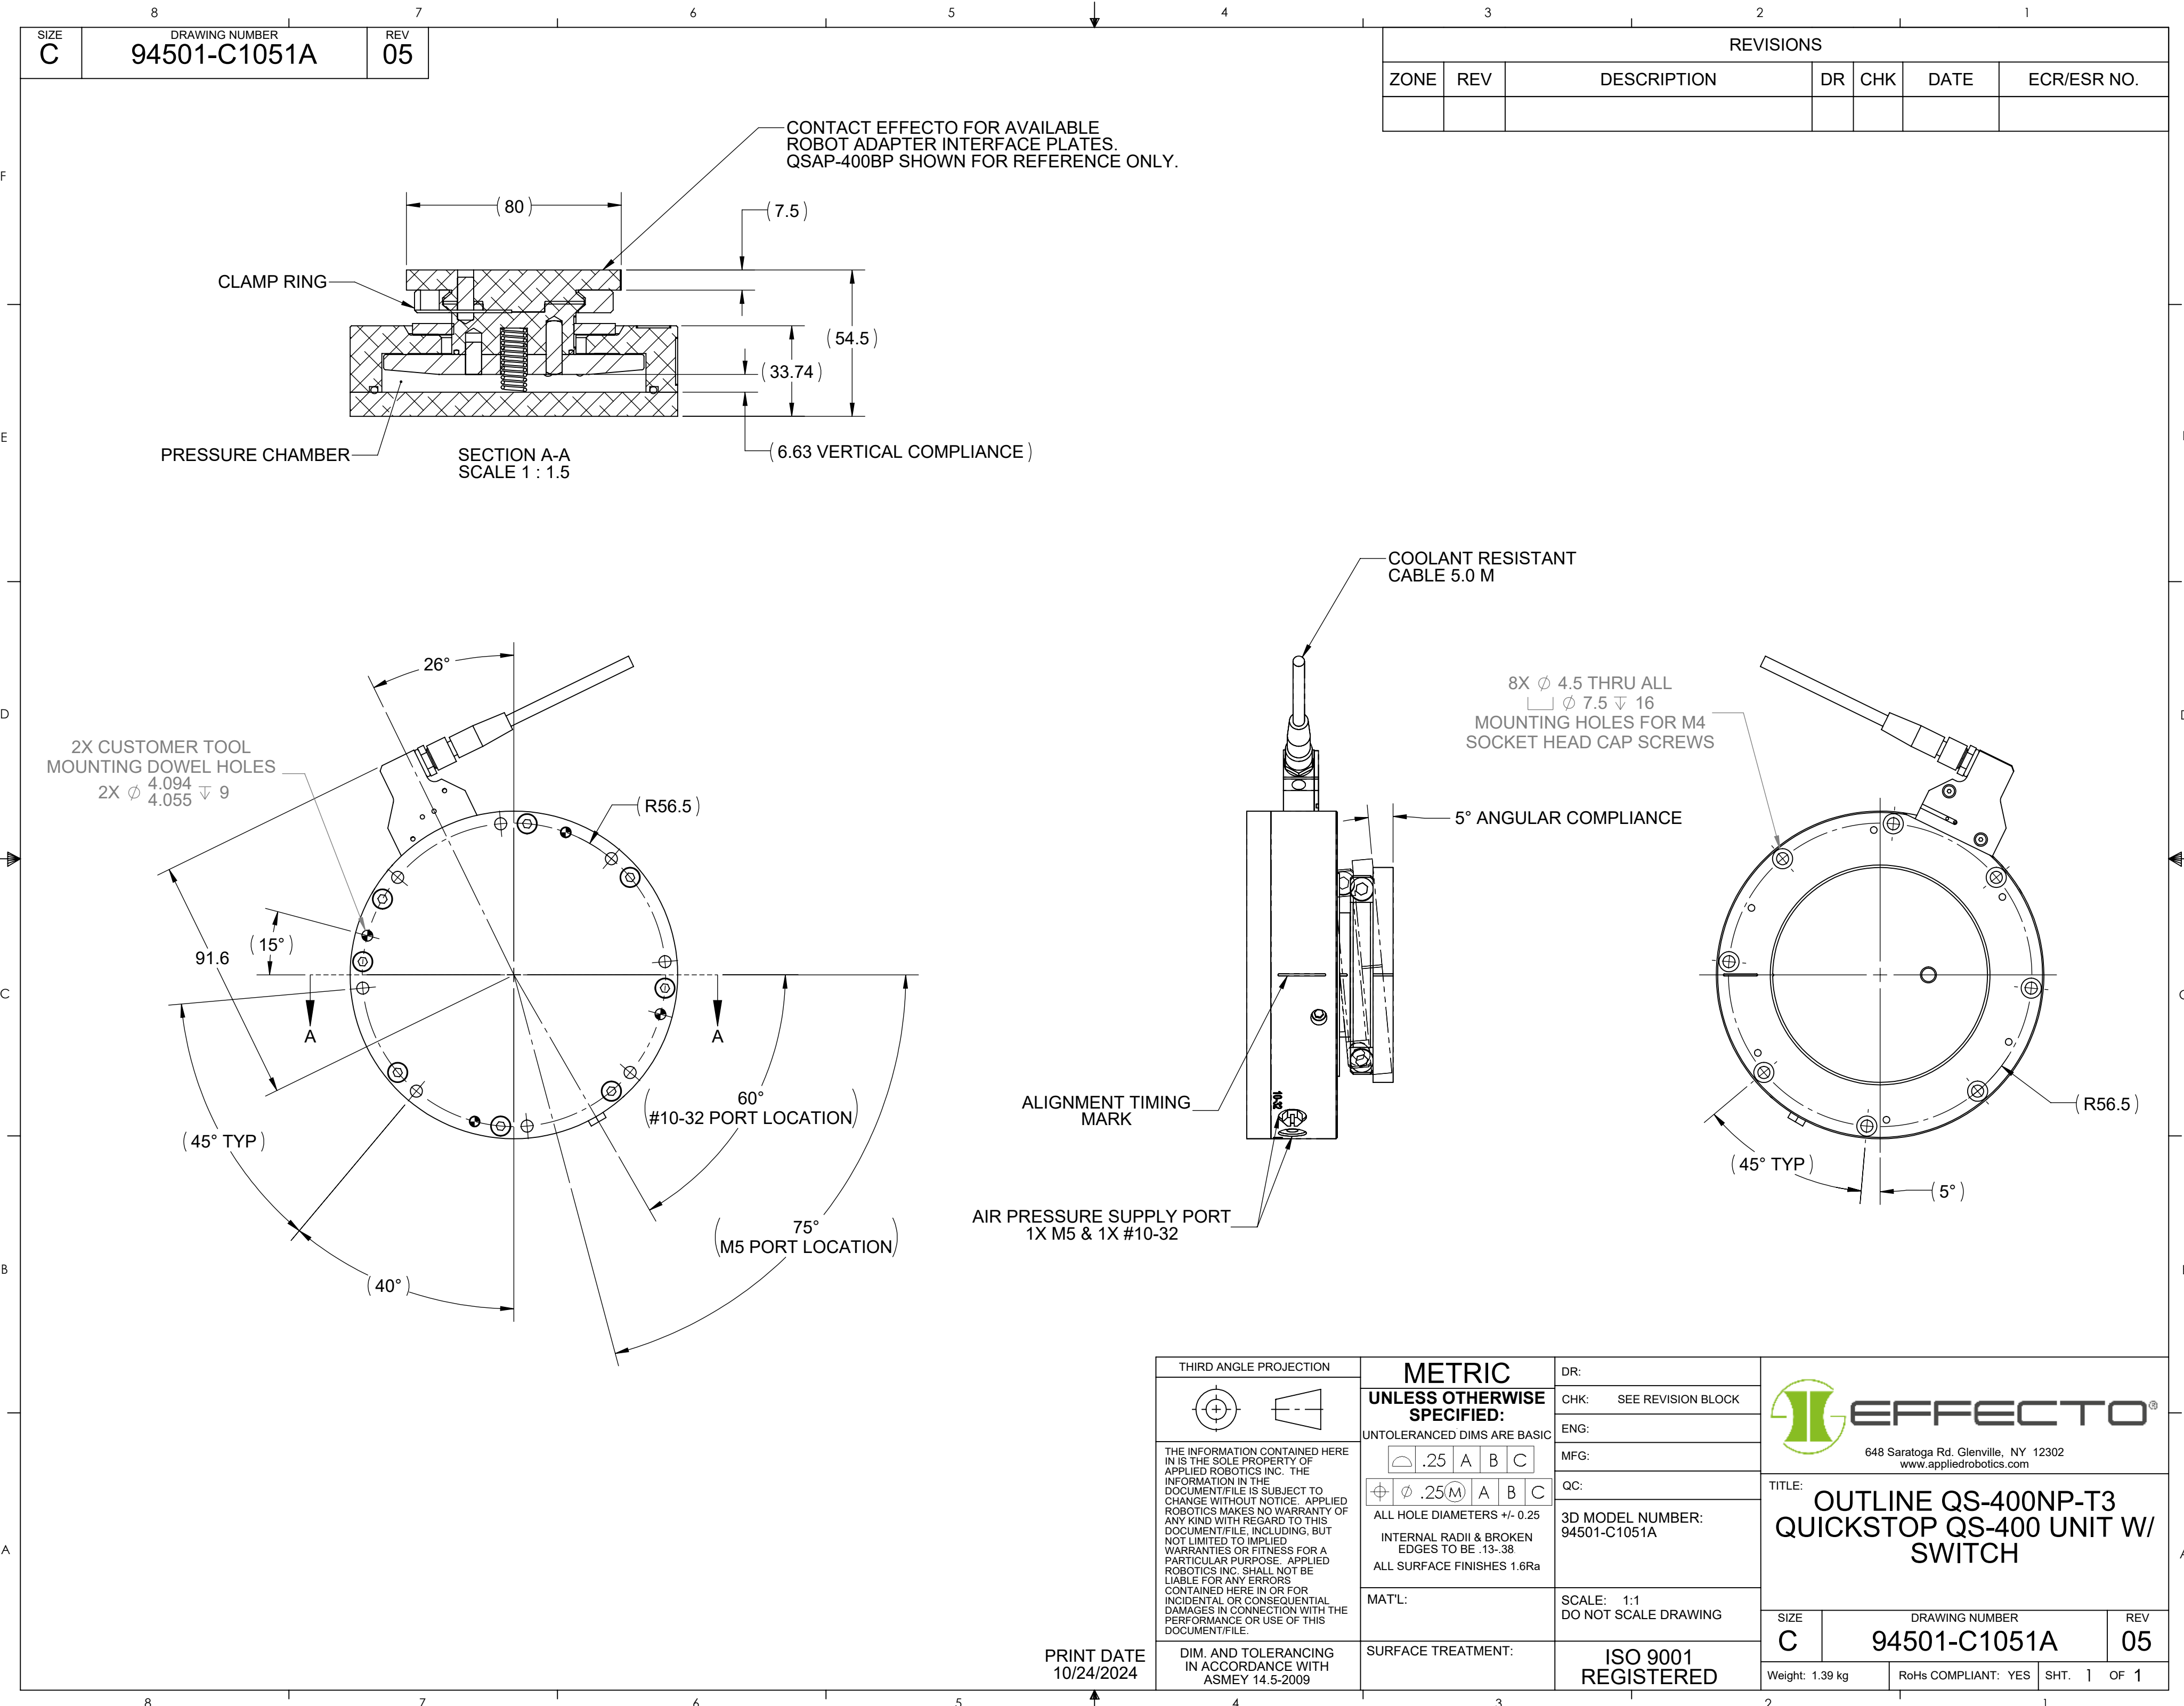

REVISIONS						
ZONE	REV	DESCRIPTION	DR	CHK	DATE	ECR/ESR NO.

CLAMP RING

PRESSURE CHAMBER

SECTION A-A
SCALE 1 : 1.5

CONTACT EFFECTO FOR AVAILABLE
ROBOT ADAPTER INTERFACE PLATES.
QSAP-400BP SHOWN FOR REFERENCE ONLY.

COOLANT RESISTANT
CABLE 5.0 M

8X ϕ 4.5 THRU ALL
 ϕ 7.5 ∇ 16
MOUNTING HOLES FOR M4
SOCKET HEAD CAP SCREWS

5° ANGULAR COMPLIANCE

ALIGNMENT TIMING
MARK

AIR PRESSURE SUPPLY PORT
1X M5 & 1X #10-32

2X CUSTOMER TOOL
MOUNTING DOWEL HOLES
2X ϕ 4.094 ∇ 9
2X ϕ 4.055



TITLE:
**OUTLINE QS-400NP-T3
QUICKSTOP QS-400 UNIT W/
SWITCH**

SIZE	DRAWING NUMBER	REV
C	94501-C1051A	05
Weight: 1.39 kg	RoHs COMPLIANT: YES	SHT. 1 OF 1

THIRD ANGLE PROJECTION	METRIC UNLESS OTHERWISE SPECIFIED: UNTOLERANCED DIMS ARE BASIC ϕ .25 (M) A B C ALL HOLE DIAMETERS +/- 0.25 INTERNAL RADII & BROKEN EDGES TO BE .13-.38 ALL SURFACE FINISHES 1.6Ra	DR: CHK: SEE REVISION BLOCK ENG: MFG: QC: 3D MODEL NUMBER: 94501-C1051A
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF APPLIED ROBOTICS INC. THE INFORMATION IN THE DOCUMENT/FILE IS SUBJECT TO CHANGE WITHOUT NOTICE. APPLIED ROBOTICS MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT/FILE, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OR FITNESS FOR A PARTICULAR PURPOSE. APPLIED ROBOTICS INC. SHALL NOT BE LIABLE FOR ANY ERRORS CONTAINED HERE IN OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE PERFORMANCE OR USE OF THIS DOCUMENT/FILE.	MAT'L: SURFACE TREATMENT:	SCALE: 1:1 DO NOT SCALE DRAWING ISO 9001 REGISTERED
DIM. AND TOLERANCING IN ACCORDANCE WITH ASMEY 14.5-2009		

PRINT DATE
10/24/2024