
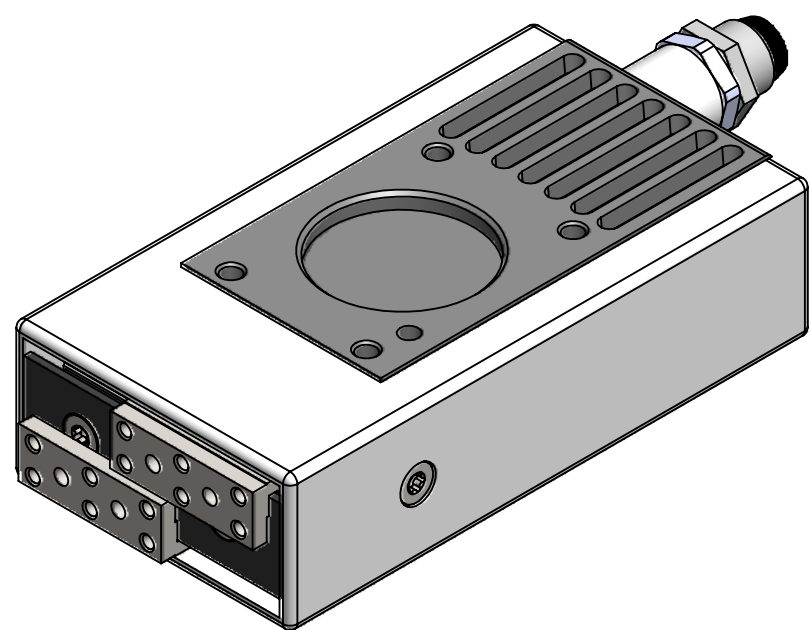


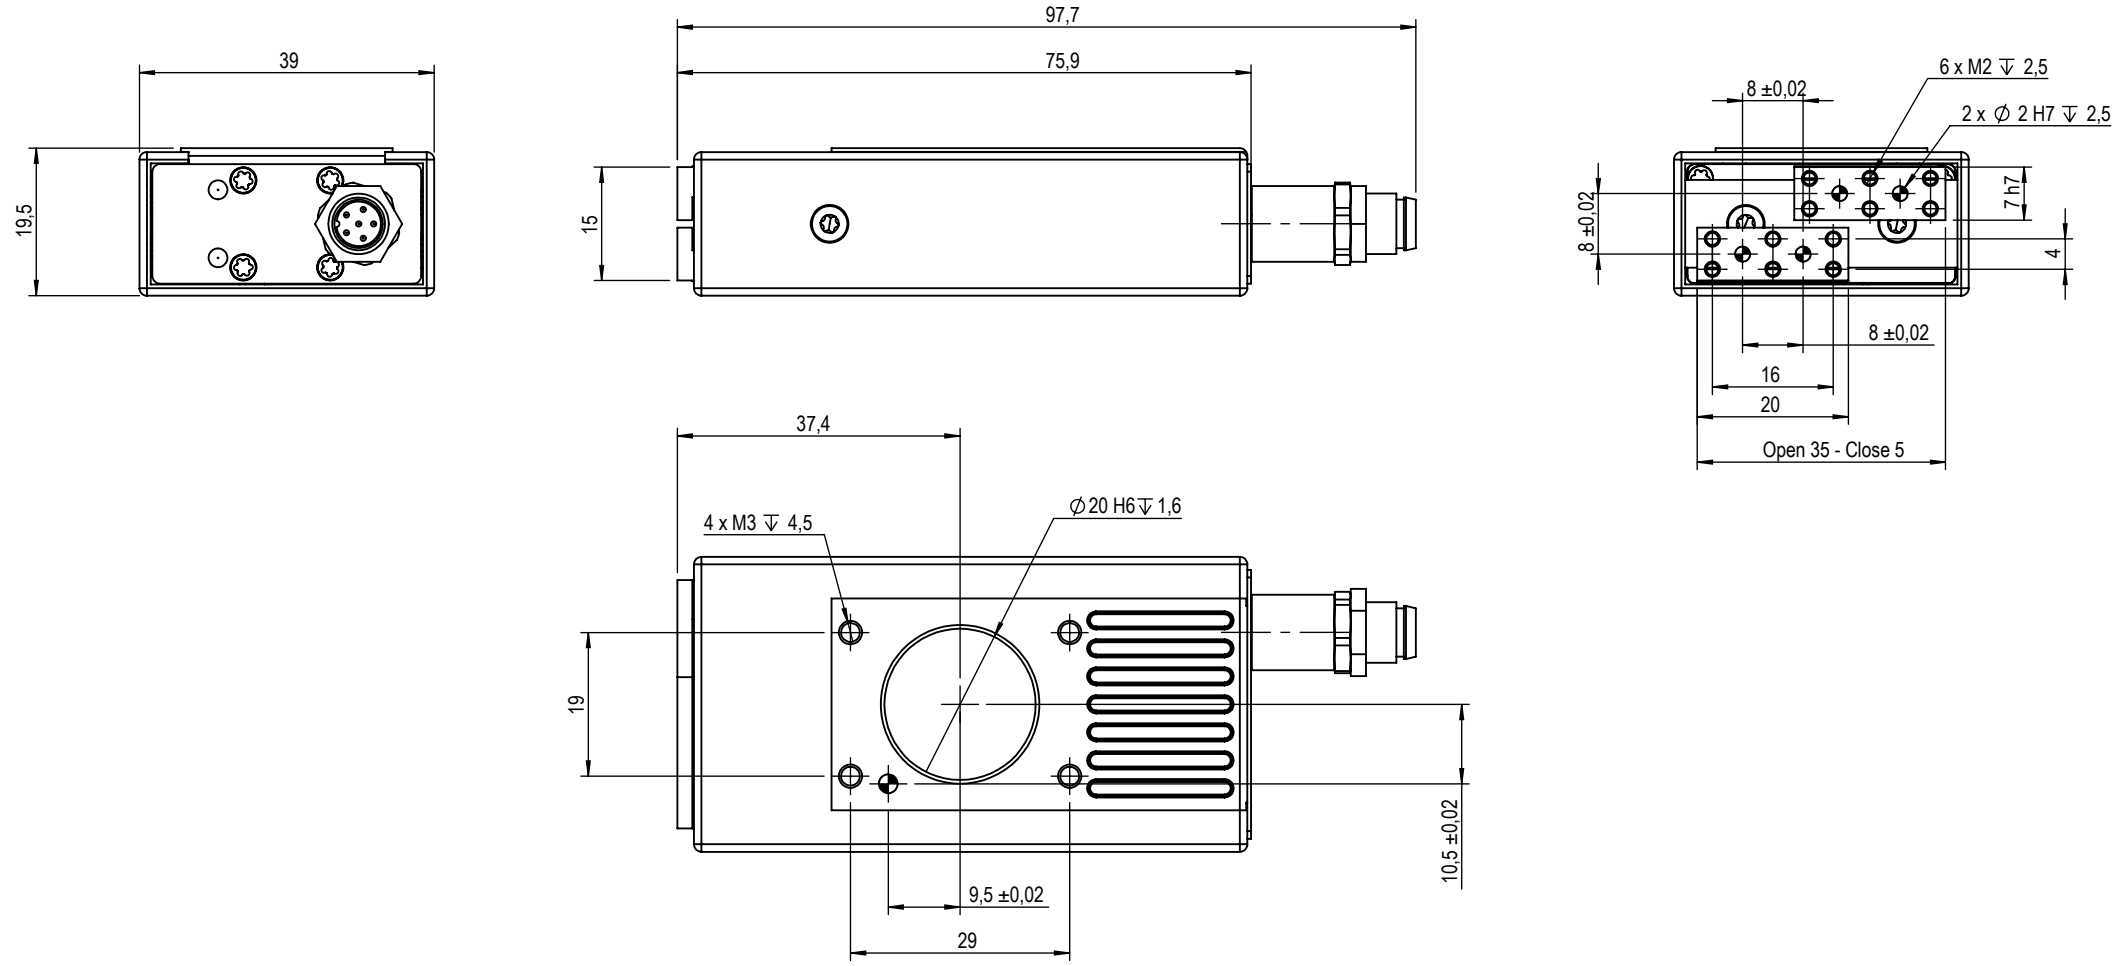

TECHNICAL DATE:	
Max. grip force:	60N _ (120N/2)
Min. grip force:	1.5N _ (3N/2)
Max. stroke (2x15):	30 mm _ (2x25)
Max. velocity:	175 mm/sec
Max. current:	0.700 A
Min. cycle rate:	17.5 M
Min. cycle time:	100 ms
Operating voltage:	12 Volt DC
Voltage range:	11-13 Volt DC
Position accuracy:	+ - 0.05 mm
Repeatability:	0.01 mm
Operating temperature:	-20°C - +60°C
Weight:	ca. 0.214 kg

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR) Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING	
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.		Eng:-		Commercial Description: SG-30-R1-N-N-S0-C0	
		PROD:-			
		QC out:		Description: SG030-R1	
		Sales:			
FIRST ANGLE PROJECTION 		General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number: PF-006-001-013	
		DATA: 05/05/2025		Weight: 0.00Kg	
				Sheet: 2 of 2	
				Rev:00	