

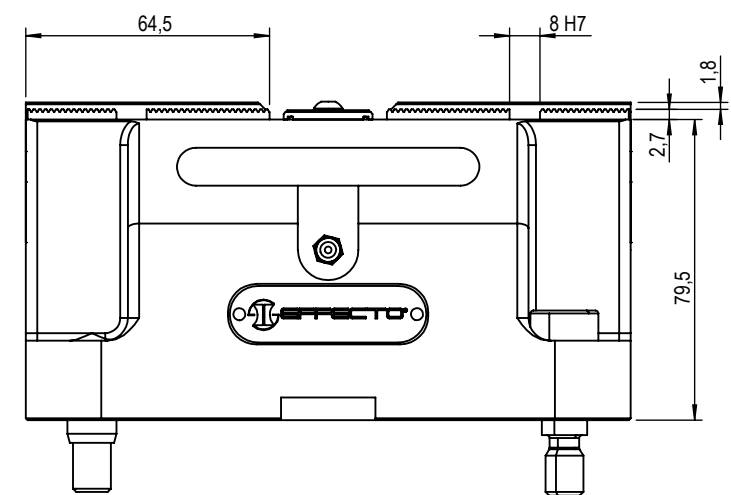
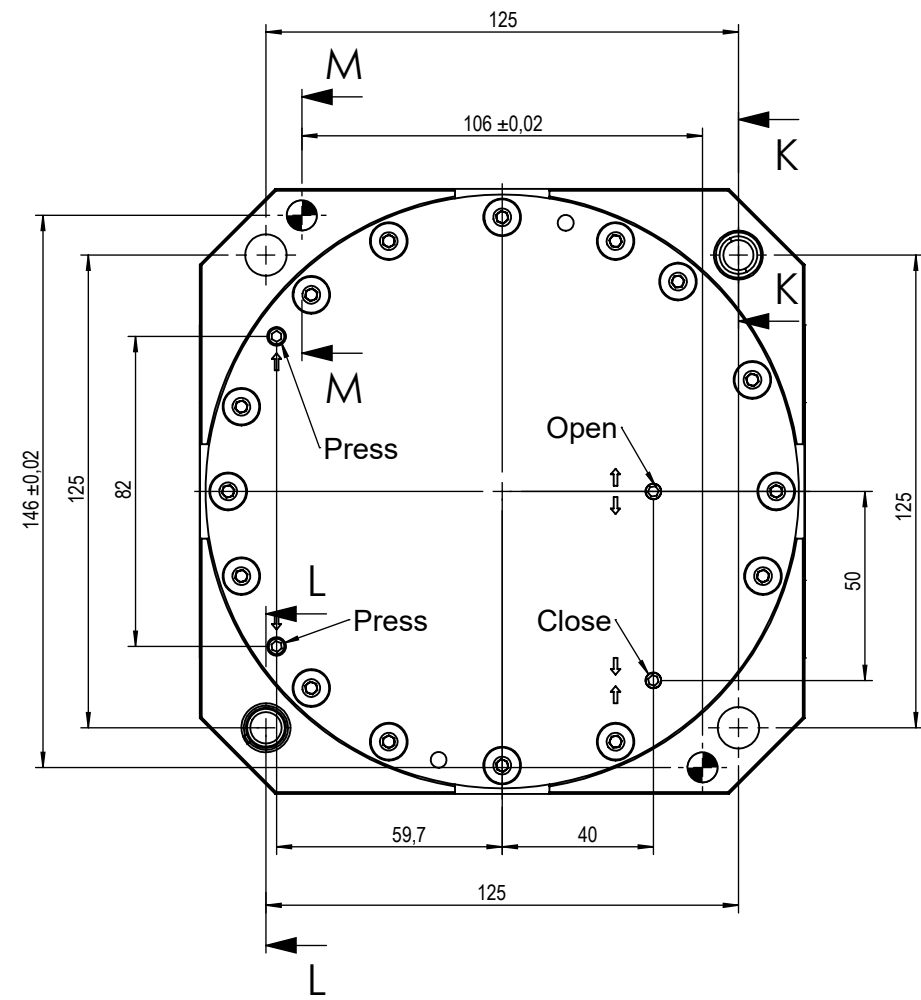
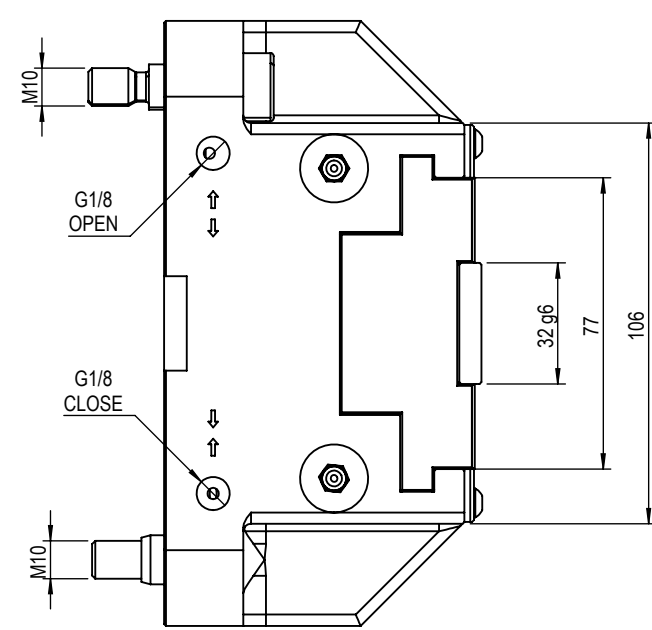
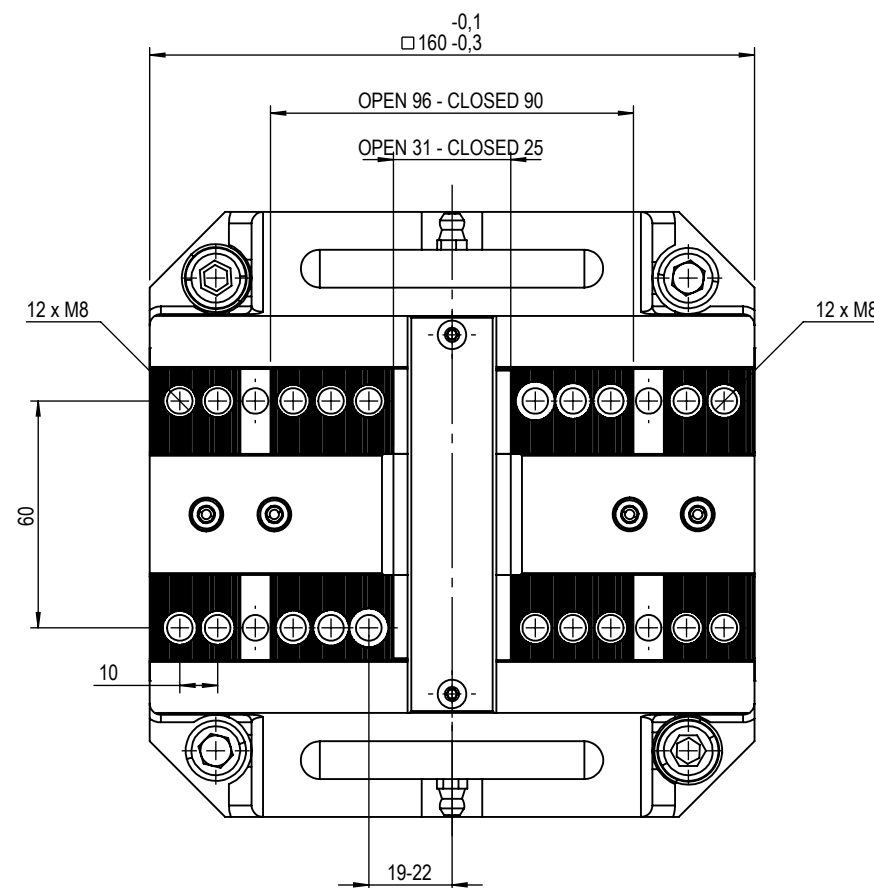



SEZIONE M-M

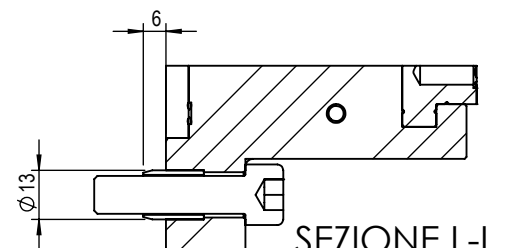

SEZIONE L-L

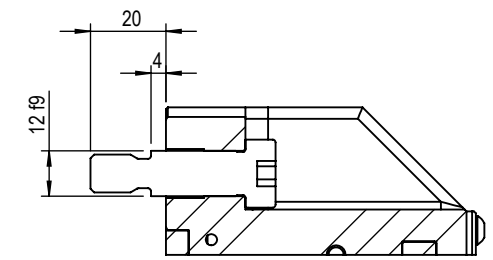

SEZIONE K-K

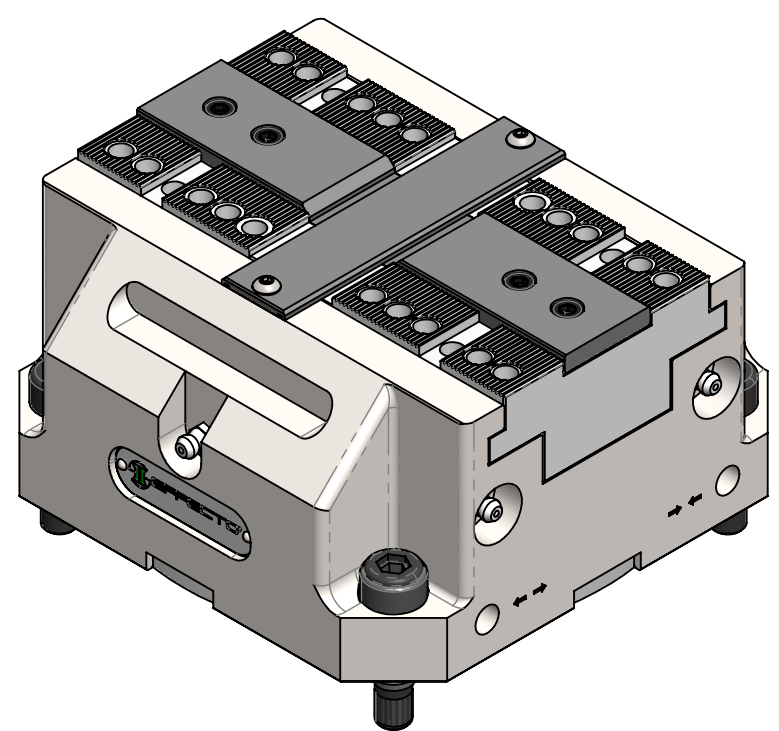

Stroke per Jaw: 3 mm

Closing Force: 25000+25000 N


Opening Force: 26500+26500 N

Repeat accuracy: ± 0.01 mm

Nominal Operating Pressure: 6 bar

Max Operating Pressure: 9 bar

Fluid consumption double stroke: 530 cm3

 EFFECTO®		Via Roma 141-143 28017 San Maurizio d'Opaglio (NO) Tel. +39 032296142 Via Don Primo Mazzolari 4 26012 Castelleone (CR): Tel. +39 037435138 www.effectogroup.com		OUTLINE DO NOT SCALE THE DRAWING		
THE INFORMATION CONTAINED HERE IN IS THE SOLE PROPERTY OF EFFECTO GROUP S.P.A. THE DIMENSIONS ARE INDICATIVE AND SUSCEPTIBLE TO CHANGE DUE TO TECHNICAL IMPROVEMENTS.WE RESERVE THE RIGHT TO MAKE CHANGES WITHOUT NOTICE.	Eng: 18/05/2026		Commercial Description:			
	PROD:M.Tozzini 18/05/2026		UVP-160-P-3-C-9-N-B-N			
	QC out:		Description:			
	Sales:		Self-Centering Vise UVP160 Short Stroke			
FIRST ANGLE PROJECTION 	General Tolerances in accordance with ISO 2768-m H CENTERING HOLE: ISO 6411		Part Number:		A3	
	DATA: 18/05/2026		UV160PSS			
			Weight: 10.86Kg		Sheet: 1 of 3	Rev:00