

Epsilon XCHANGE® Tool Changer

Manual Tool Changer

EM is a manual tool changer for exchanging robotic end-of-arm tooling (EOAT) between operations.

Advantages

- Integrated operating lever makes it toolless
- High strength aluminum alloy body
- high energy density (payload to weight ratio)
- intuitive operation
- High connection repeatability
- Easy and ergonomic insertion
- Long life (over 5,000 changes)
- Prevention against accidental release (dual safety mechanism)
- Optional Connection of Utility Modules




SPECIFICATIONS

Model	Recommended Payload**	Tensile Force	Compressive Force	Operating Moment	Repeatability	Mass of Robot Side	Mass of Tool Side	Locking Force	Locking Stroke
	kg (lb)	N (lb)	kN (kip)	mm (in)	mm (in)	kg (lb)	kg (lb)	N (lb)	mm (in)
EM040	8 (17.6)	540 (121)	48 (11)	50 (443)	±0.02 (±0.001)	0.13 (0.29)	0.05 (0.11)	4 - 50 (0.9 - 11.2)	0 - 0.80 (0 - 0.03)
EM050	18 (39.7)	700 (157)	80 (18)	70 (620)	±0.02 (±0.001)	0.10 (0.22)	0.10 (0.22)	4 - 50 (0.9 - 11.2)	0 - 1 (0 - 0.04)
EM063	20 (44.1)	800 (180)	160 (36)	100 (885)	±0.02 (±0.001)	0.20 (0.44)	0.20 (0.44)	5 - 60 (1.1 - 13.5)	0 - 1 (0 - 0.04)
EM080	25 (55.1)	1,000 (225)	219 (49)	130 (1,150)	±0.02 (±0.001)	0.35 (0.77)	0.35 (0.77)	6 - 70 (1.3 - 15.7)	0 - 1 (0 - 0.04)
EM100	40 (88.2)	1,200 (270)	337 (85)	180 (1,593)	±0.02 (±0.001)	0.55 (1.21)	0.55 (1.21)	8 - 80 (1.8 - 18.0)	0 - 1 (0 - 0.04)
EM125	52 (114.6)	2,000 (450)	626 (141)	320 (2,832)	±0.02 (±0.001)	1.20 (2.65)	1.20 (2.65)	10 - 100 (2.2 - 22.5)	0 - 1 (0 - 0.04)

SECTIONAL DIAGRAM



Epsilon **XCHANGE**® manual tool changing technology allows for exchanging robotic end-of-arm tooling (EOAT) between operations. The integrated operating lever adds efficiency and simplicity to processes that require frequent connection/disconnection of tooling, while also reducing the probability of human errors introduced by tool connection methods.



PRODUCT INFORMATION




06.26_Rev.02

ROBOT SIDE ADAPTOR



TOOL SIDE ADAPTOR

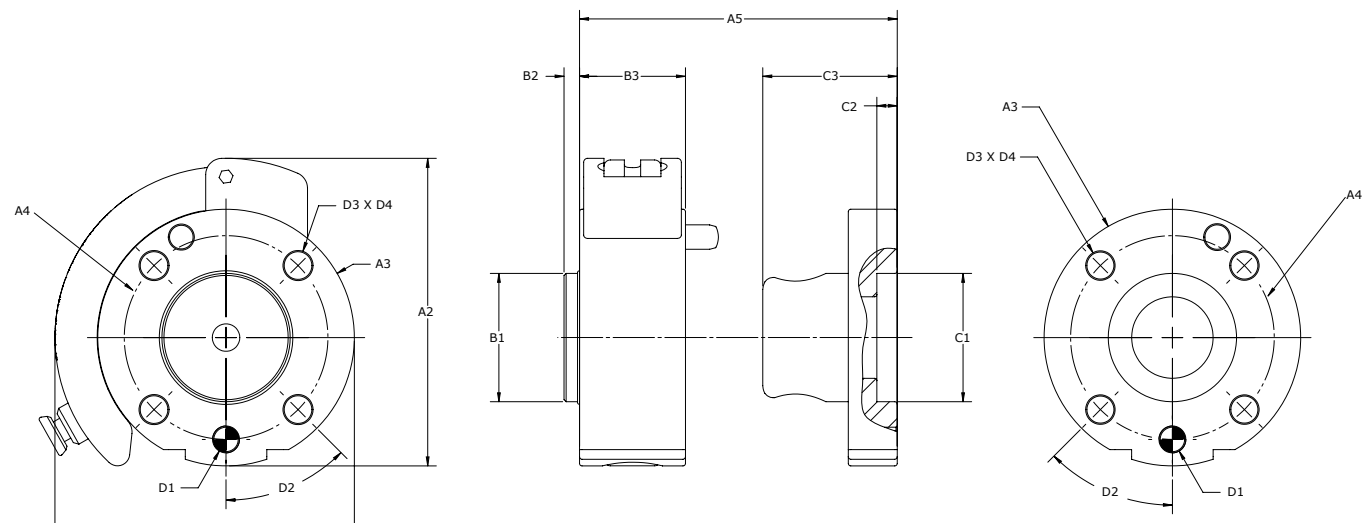

	Overall Dimensions					Robot Side Dimensions			Tool Side Dimensions			Bolting Pattern				
	A1	A2	A3	A4	A5	B1	B2	B3	C1	C2	C3	D1	D2	D3	D4-A	D4-B
EM040	57	62.5	50	40	32	25	3.8	22	25	5	28	6	45°	4	M6	M8
	(2.24)	(2.46)	(1.97)	(1.57)	(1.26)	(0.98)	(0.15)	(0.87)	(0.98)	(0.20)	(1.10)	(0.24)				
EM050	73.3	75.6	63	50	38	31.5	3.8	26	31.5	5	33	6	45°	4	M6	M8***
	(2.89)	(2.98)	(2.48)	(1.97)	(1.50)	(1.24)	(0.15)	(1.02)	(1.24)	(0.20)	(1.30)	(0.24)				
EM063	90	87.24	80	63	45	40	3.8	32	40	5	38.5	6	45°	4	M6	M8
	(3.54)	(3.43)	(3.15)	(2.48)	(1.77)	(1.57)	(0.15)	(1.26)	(1.57)	(0.20)	(1.52)	(0.24)				
EM080	110	113.5	100	80	47	50	3.8	32	50	6	39	8	30°	6	M8	M10
	(4.33)	(4.47)	(3.94)	(3.15)	(1.85)	(1.97)	(0.15)	(1.26)	(1.97)	(0.24)	(1.54)	(0.31)				
EM100	147	140	125	100	50	63	3.8	35	63	6	41	8	30°	6	M8	M10
	(5.39)	(5.51)	(4.92)	(3.94)	(1.97)	(2.48)	(0.15)	(1.38)	(2.48)	(0.24)	(1.61)	(0.31)				
EM125	55.5	80	122	125	70	80	3.8	50	80	6	64	8	30°	6	M8	M12
	(2.19)	(3.15)	(4.80)	(4.95)	(2.76)	(3.15)	(0.15)	(1.97)	(3.15)	(0.24)	(2.52)	(0.31)				

* Dimensions are in millimeters (inches).
** Interfacing to the tool changer adaptors can be done either by bolting through the adaptor (ISO 9409-1 specification, D4-A) or by bolting directly into the adaptor (D4-B).
*** The EM050 Tool Side Adaptor is also available with a bolt directly into version: M6 threads on the 50 mm bolt pattern (ISO 9409-1) Specification.
**** All dimensions are descriptive and subject to variation for technical upgrading. We reserve the right to make variations without prior notification.



Effecto Group S.p.A.
Via Roma, 141/143
28017 San Maurizio d'Opaglio (NO) - IT
Tel. +39 0322 96142
info@effecto.com

Effecto, Inc.
648 Saratoga Road
Glenville, NY 12302 - US
Tel. +1 518 384 1000
info@us.effecto.com
www.effecto.com

Effecto GmbH
Liegnitzer Str. 6
82194 Gröbenzell - DE
Tel. +49 8142 59397 0
info@de.effecto.com