


Pneumatic Parallel Grippers

OPE 2-Finger

OPE is a universal two-finger parallel gripper featuring high reliability and long service life, suitable for a wide range of industrial applications.

Advantages

- Robust, lightweight housing made of hard-coated aluminum alloy.
- Sturdy C-slot with hardened steel gibs for effective jaw guidance, precise handling, and easy maintenance.
- Mounting from two sides in three screw directions for versatile and flexible integration.
- Side or top finger mounting.
- Integrated permanent magnets for direct monitoring of piston movement.
- Slots for mounting and positioning of magnetic-field sensors.
- Air supply via fitting screw connections or hose-free direct connections (optional version "X").



SPECIFICATIONS from OPE50 to OPE80

Model	Stroke Per Jaw	Air Consumption Per Cycle (Dual Stroke)	Closing Force Per Jaw	Opening Force Per Jaw	Total Closing Force	Total Opening Force	Recommended Workpiece Weight*	Repeatability	Weight
			@ 6 bar	@ 6 bar	@ 6 bar	@ 6 bar			
OPE 50	5 mm 0.20 in	3.5 cm ³ 0.21 in ³	55 N 12.4 lb	65 N 14.6 lb	110.0 N 24.7 lb	130.0 N 29.2 lb	0.55 kg 1.20 lb	± 0.05 mm ± 0.002 in	0.26 kg 0.57 lb
OPE 50 S	3 mm 0.12 in	3.5 cm ³ 0.21 in ³	92 N 20.7 lb	109 N 24.5 lb	184.0 N 41.4 lb	218.0 N 49.0 lb	0.92 kg 2.00 lb	± 0.05 mm ± 0.002 in	0.245 kg 0.54 lb
OPE 60	7.5 mm 0.30 in	7 cm ³ 0.43 in ³	75 N 16.9 lb	83 N 18.7 lb	150.0 N 33.7 lb	166.0 N 37.3 lb	0.75 kg 1.70 lb	± 0.05 mm ± 0.002 in	0.37 kg 0.81 lb
OPE 60 S	3.75 mm 0.15 in	7 cm ³ 0.43 in ³	150 N 33.7 lb	166 N 37.3 lb	300.0 N 67.4 lb	332.0 N 74.6 lb	1.50 kg 3.30 lb	± 0.05 mm ± 0.002 in	0.35 kg 0.77 lb
OPE 70	10 mm 0.39 in	9.5 cm ³ 0.58 in ³	75 N 16.9 lb	83 N 18.7 lb	150.0 N 33.7 lb	166.0 N 37.3 lb	0.75 kg 1.70 lb	± 0.05 mm ± 0.002 in	0.50 kg 1.10 lb
OPE 70 S	5 mm 0.20 in	9.5 cm ³ 0.58 in ³	150 N 33.7 lb	166 N 37.3 lb	300.0 N 67.4 lb	332.0 N 74.6 lb	1.50 kg 3.30 lb	± 0.05 mm ± 0.002 in	0.50 kg 1.10 lb
OPE 80	12 mm 0.47 in	16 cm ³ 0.98 in ³	110 N 24.7 lb	123 N 27.7 lb	220.0 N 49.5 lb	246.0 N 55.3 lb	1.10 kg 2.40 lb	± 0.05 mm ± 0.002 in	0.80 kg 1.76 lb
OPE 80 S	6 mm 0.24 in	16 cm ³ 0.98 in ³	220 N 49 lb	246 N 55.3 lb	440.0 N 98.9 lb	492.0 N 110.6 lb	2.20 kg 4.80 lb	± 0.05 mm ± 0.002 in	0.76 kg 1.67 lb

* Recommended workpiece weight is calculated for force-fit gripping with a coefficient of static friction of 0.15 and a safety factor of 3 against workpiece slippage.

** Further OPE 2-finger dimensions in the following pages

Operating Pressure **2 - 12 bar (29 - 174 psi)**

Working Temperature **5 - 60 °C (41 - 140 °F)**

Noise Emission (Sound Pressure) **≤ 70 dB(A) in any direction**

SECTIONAL DIAGRAM



Guidelines for the selection of a gripper model

Selection of the correct gripper model depends on the workpiece's weight, the friction coefficient between the fingers and the workpiece and the required motion of the application. Due to inertial forces associated with motion, we recommend that the holding force of the gripper model should be from 10 to 20 times the workpiece's weight. If the application presents high acceleration/deceleration or impacts during the motion, then a further safety margin should be considered.







PRODUCT INFORMATION




03.2.5_Rev.06

Dowel hole depth: Body $\geq 1.2 d$ - Jaws $\geq 1 d$

C4* Up to 6 mm = $0/+0.025$ mm - From 6 mm to 10 mm = $0/+0.030$ mm - Over 10 mm = $0/+0.040$ mm

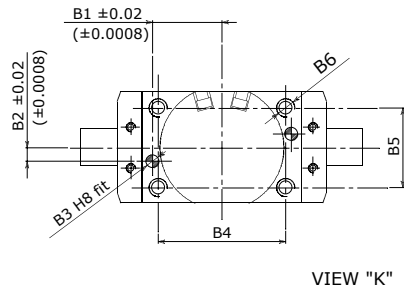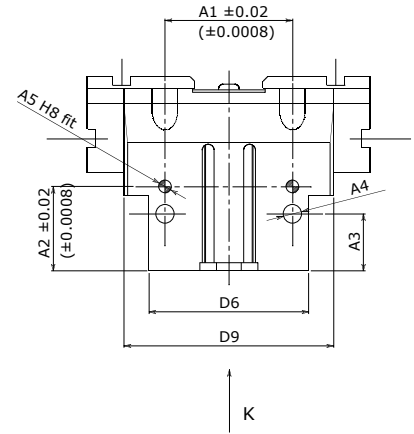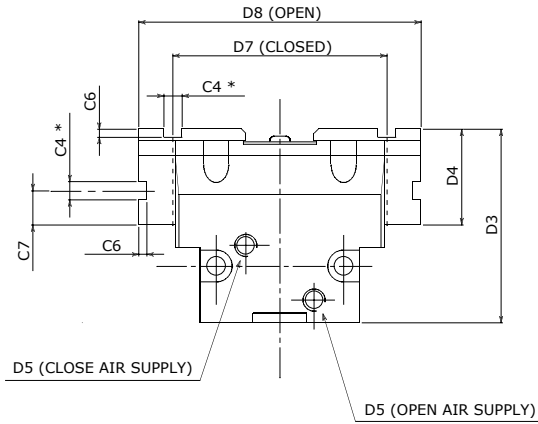

VIEW "K"

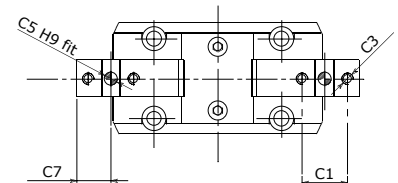

Options

- High force version (S version)
- Hose-free direct connections (X version)
- Mounting brackets for inductive proximity switches
- Magnetic switches

	Mounting - Option # 1					Mounting - Option # 2				
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5
OPE 50	35	28	20	4.5	4	19	5	4	35	23
OPE 50 S	(1.38)	(1.10)	(0.79)	(0.18)	(0.16)	(0.75)	(0.20)	(0.16)	(1.38)	(0.91)
OPE 60	40	30	21	5.5	4	22	6	4	40	27
OPE 60 S	(1.57)	(1.18)	(0.83)	(0.22)	(0.16)	(0.87)	(0.24)	(0.16)	(1.57)	(1.06)
OPE 70	40	32.5	23.5	5.5	4	22	6	4	40	27
OPE 70 S	(1.57)	(1.28)	(0.93)	(0.22)	(0.16)	(0.87)	(0.24)	(0.16)	(1.57)	(1.06)
OPE 80	50	34	24	6.5	5	27.5	7	5	50	32
OPE 80 S	(1.97)	(1.34)	(0.94)	(0.26)	(0.20)	(1.08)	(0.28)	(0.20)	(1.97)	(1.26)

	Finger Application							Informational Dimensions								
	C1	C2	C3	C4	C5	C6	C7	D1	D2	D3	D4	D5	D6	D7	D8	D9
OPE 50	12	12	M4	4	3	3	10	32	26.5	55	23.5	M5	44	50	60	48
OPE 50 S	(0.47)	(0.47)		(0.16)	(0.12)	(0.12)	(0.39)	(1.26)	(1.04)	(2.17)	(0.93)		(1.73)	(1.97)	(2.36)	(1.89)
OPE 60	13	14	M4	5	4	3	10.5	37	26.5	59	25	M5	50	58	73	56
OPE 60 S	(0.51)	(0.55)		(0.20)	(0.16)	(0.12)	(0.41)	(1.46)	(1.04)	(2.32)	(0.98)		(1.97)	(2.28)	(2.87)	(2.20)
OPE 70	16	14	M4	5	4	3	12.5	37	28.5	67	30.5	M5	50	72	92	70
OPE 70 S	(0.63)	(0.55)		(0.20)	(0.16)	(0.12)	(0.49)	(1.46)	(1.12)	(2.64)	(1.20)		(1.97)	(2.83)	(3.62)	(2.76)
OPE 80	18	16	M5	6	5	3.5	14	44	30.5	75	35.5	M5	62	80	104	78
OPE 80 S	(0.71)	(0.63)		(0.24)	(0.20)	(0.14)	(0.55)	(1.73)	(1.20)	(2.95)	(1.40)		(2.44)	(3.15)	(4.09)	(3.07)

* Dimensions are in millimeters (inches).

** All dimensions are descriptive and subject to variation for technical upgrading. We reserve the right to make variations without prior notification



Effecto Group S.p.A.

Via Roma, 141/143
28017 San Maurizio d'Opaglio (NO) - IT
Tel. +39 0322 96142
info@effecto.com

Effecto, Inc.

648 Saratoga Road
Glenville, NY 12302 - US
Tel. +1 518 384 1000
info@us.effecto.com

www.effecto.com

Effecto GmbH

Liegnitzer Str. 6
82194 Gröbenzell - DE
Tel. +49 8142 59397 0
info@de.effecto.com