

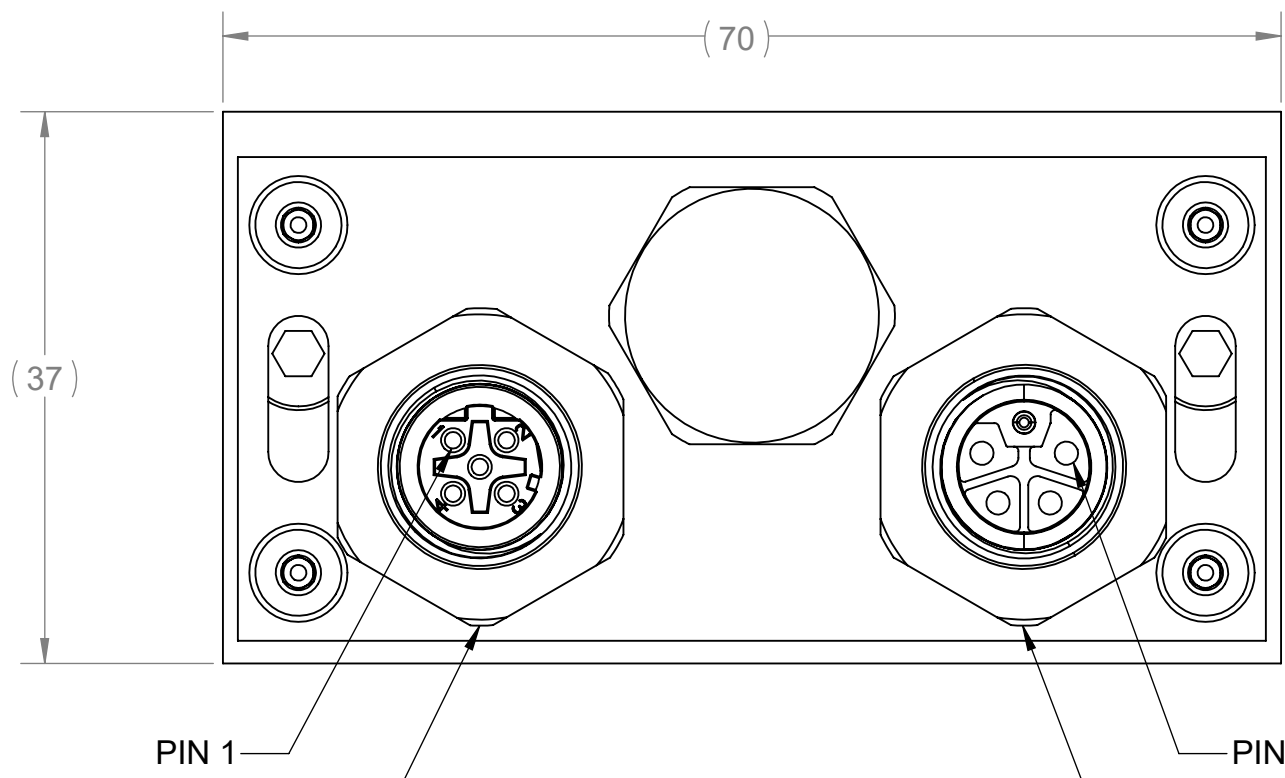


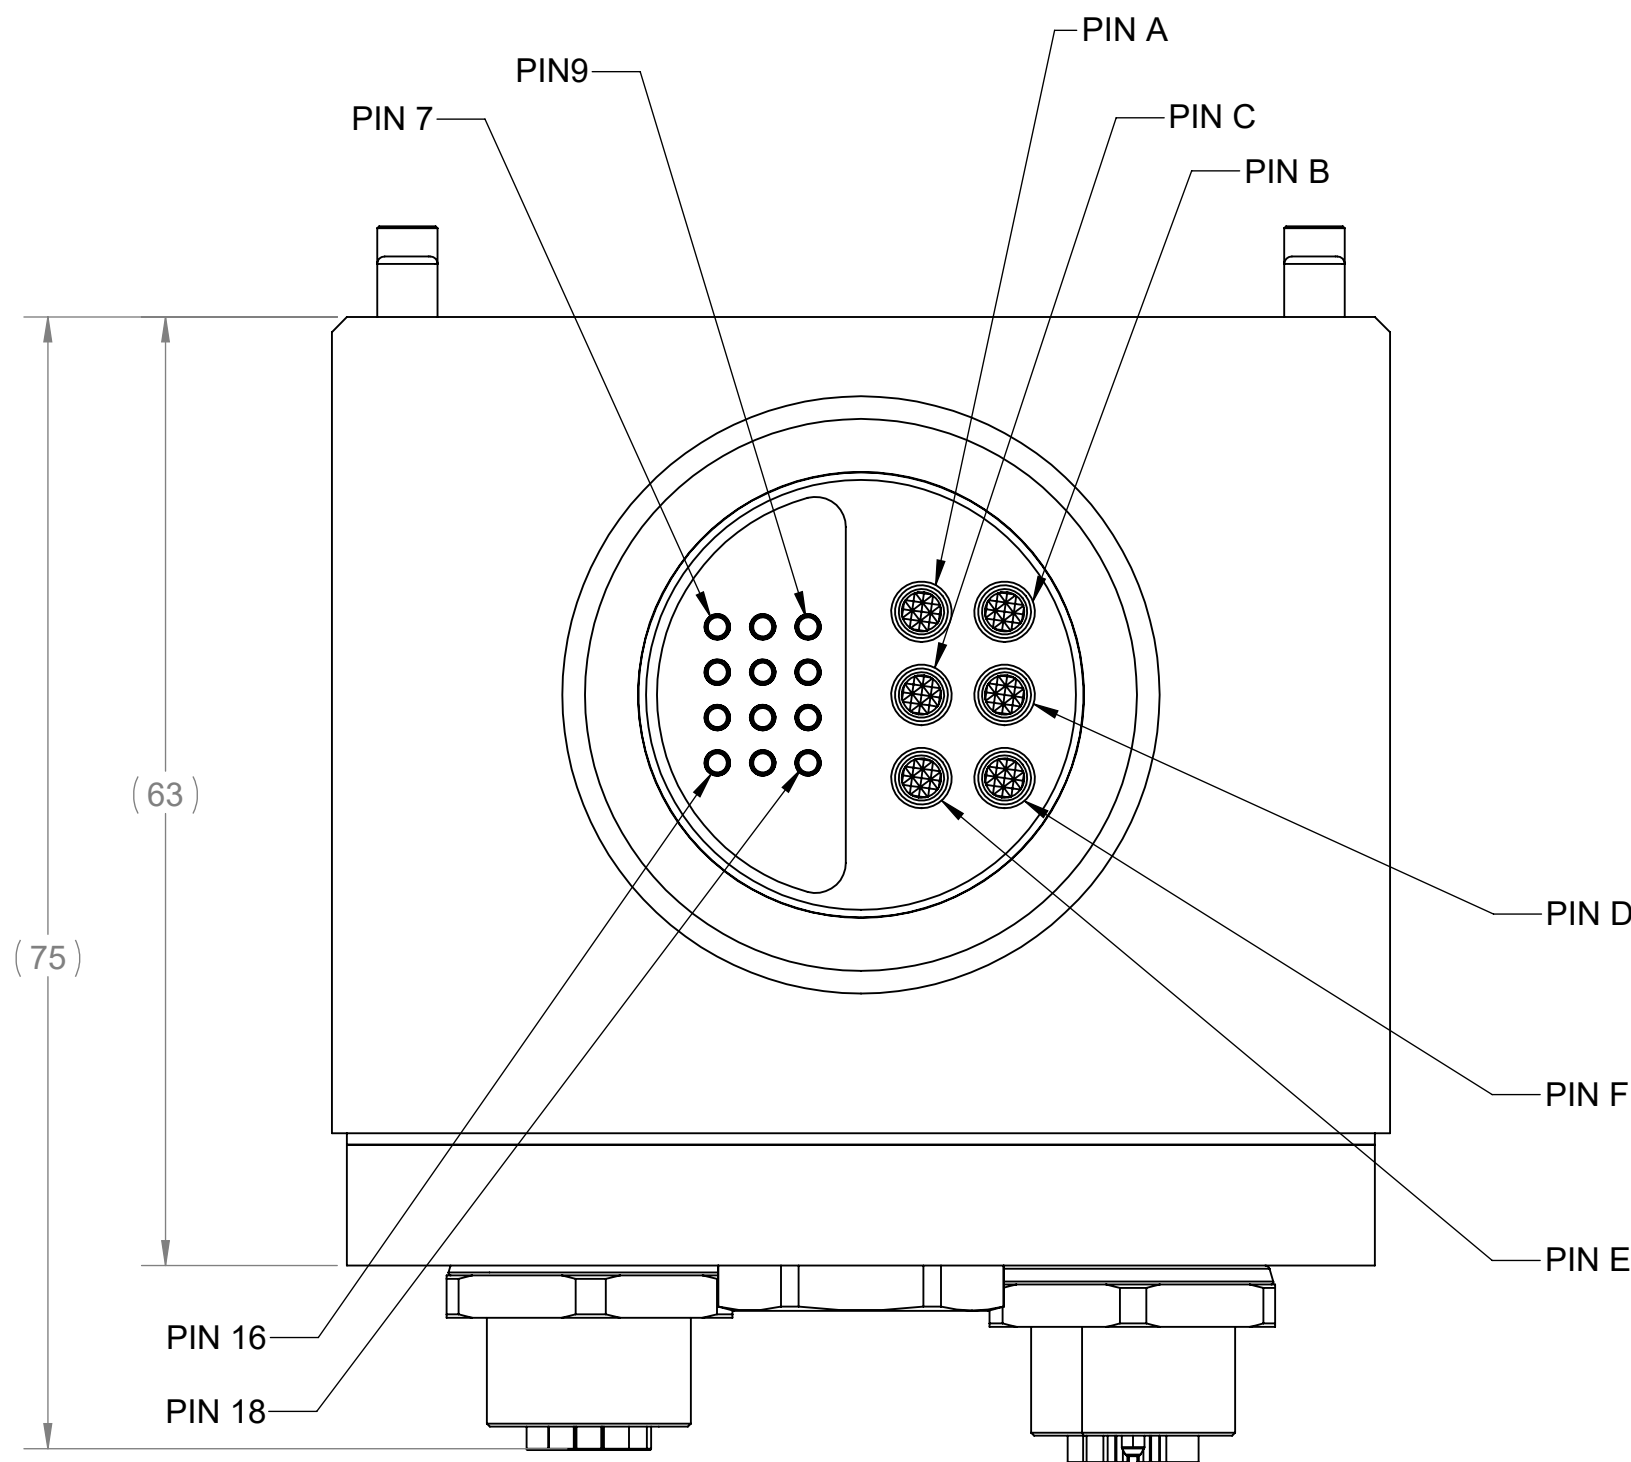

CONNECTOR, 4 SOC, M12 D-CODED, M16 X 1.5

CONNECTOR, 5 SOC, M12 L-CODED, M16 X 1.5

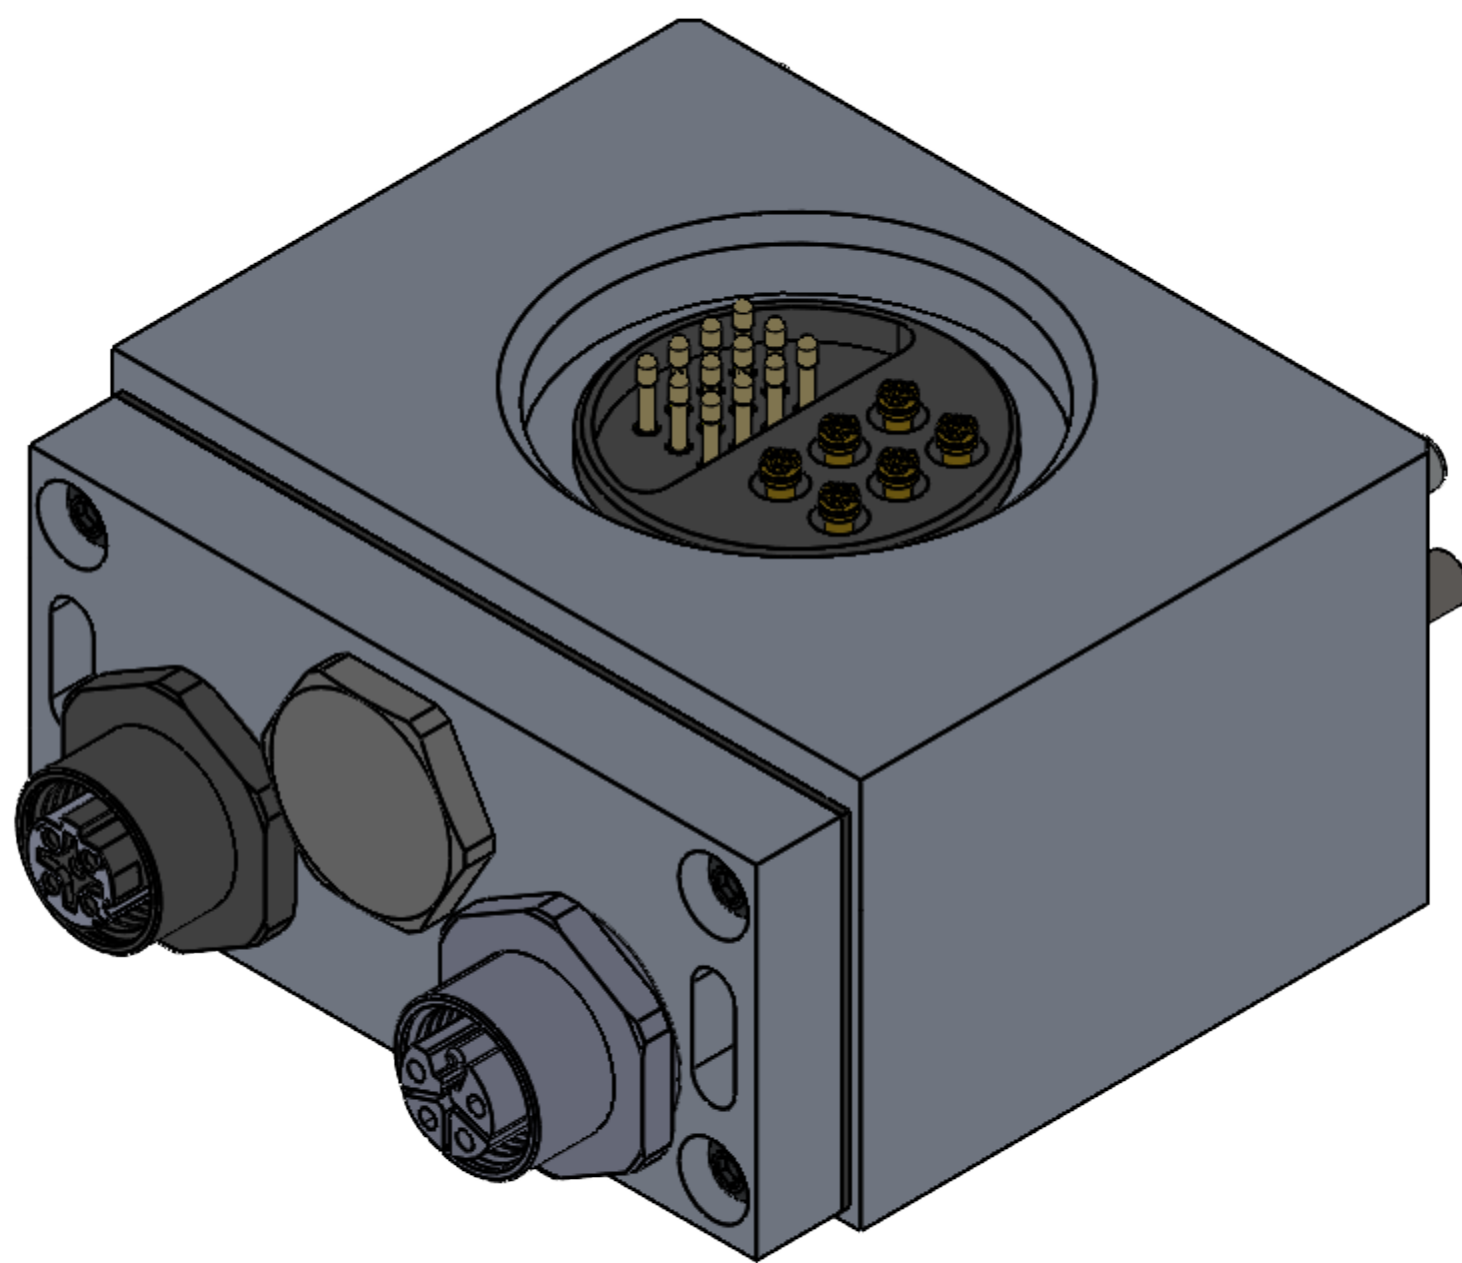

| CONN. SPEC. | WIRE CHART |             |             |          |
|-------------|------------|-------------|-------------|----------|
|             | CONN. PIN# | WIRE        | SPRING PIN# | FUNCTION |
| 4 AMP 250V  | T1         |             |             |          |
|             | 1          | #22 AWG YEL | 14          | Rx+      |
|             | 2          | #22 AWG WHT | 12          | Tx+      |
|             | 3          | #22 AWG ORN | 8           | Rx-      |
|             | 4          | #22 AWG BLU | 10          | Tx-      |
|             | -          | -           | 7           | -        |
|             | -          | -           | 9           | -        |
|             | -          | -           | 11          | -        |
|             | -          | -           | 13          | -        |
|             | -          | -           | 15          | -        |
|             | -          | -           | 16          | -        |
|             | -          | -           | 17          | -        |
| 16 AMP 63V  | T3         |             |             |          |
|             | 1          | #16 AWG BRN | A           | US +24V  |
|             | 2          | #16 AWG WHT | B           | UA 0V    |
|             | 3          | #16 AWG BLU | C           | US 0V    |
|             | 4          | #16 AWG BLK | D           | UA +24V  |
|             | FE         | #16 AWG PNK | E           | GND PE   |
|             | -          | -           | F           | -        |